



Datenblatt - Fiche technique - Data sheet

**21.15.0892**




ROLINE S/FTP-(PiMF-) Kabel Kat.6 / Class E Litze, 300m


ROLINE Câble S/FTP (PiMF) Cat. 6 / Classe E fils tressés, 300m

ROLINE Cat.6 S/FTP (PiMF) Cable, Stranded, AWG23, 300 m

SCALE 8/1

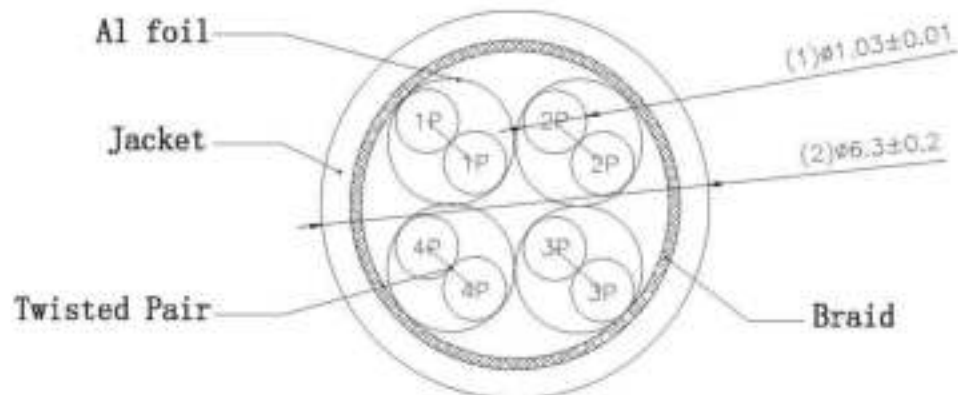

SCALE 1/2

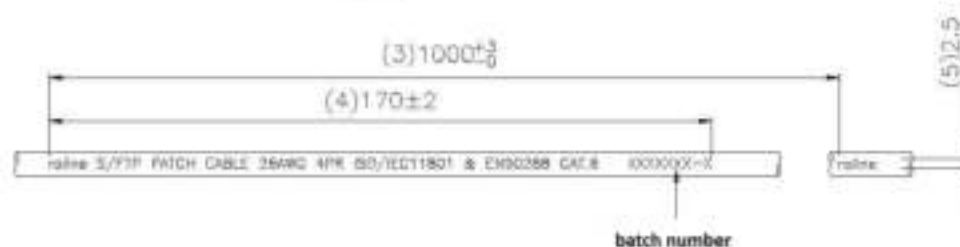

SCALE 1/1

roline S/FTP PATCH CABLE 26AWG 4PR ISO/IEC11801 & EN50288 CAT.6 XXXXXX-X

**Specifications:**

1. Twisted pair wiring: T568B
2. Copper conductor : 26 AWG
3. XXXXXX-X : Batch Number
4. Print legend : grey color with blue printing
5. Jacket Material: PVC
6. Conductor OD:
  - Blue & White/Blue:  $1.03 \pm 0.01$
  - Green & White/Green:  $1.03 \pm 0.01$
  - Orange & White/ Orange:  $1.03 \pm 0.01$
  - Brown & White/ Brown:  $1.03 \pm 0.01$
7. Please add the meter printing etc. 0001 - 0002 - 0003.....9999 at the end of patch cord if they will be shipped as cable products (Please be noted the printing without "M")

<b>Item no.</b>	<b>21.15.0892</b>		
<b>Description</b>	<b>ROLINE Cat. 6 S/FTP Lan Cable, stranded, 300m, grey</b>		
*#: Matching DIM. ***: Important DIM. Others - General DIM.	DRAWING	19.Asl.2014	byz
	CHECK	19.Asl.2014	Jane
	APPROVAL	19.Asl.2014	Frank
	DATE	NAME	
GENERAL TOLERANCE OF DIMENSIONS: XXXX ±0.005 XXX ±0.05 XX ±0.1	SCALE	1/1 (A4)	UNIT mm
	DRAWING NO.		
	DRAWING CLASSIFICATION		
	S	SHEET	1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER