

**EMC TEST REPORT**

For

Bravour Deutschland GmbH**Multi-ports USB Charging HUB****Test Model: B-20****Additional Model No.: Please Refer To Page 9**

Prepared for : Bravour Deutschland GmbH
Address : Alt-Heerdt 104, 40549 Düsseldorf, Deutschland

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C,
Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 20, 2022
Number of tested samples : 2
Sample No. : 220408088A-1, 220408088A-2
Date of Test : April 20, 2022 ~ April 22, 2022
Date of Report : May 25, 2022



**EMC TEST REPORT****EN 55032:2015+A11:2020**

Electromagnetic compatibility of multimedia equipment - Emission Requirements

EN 55035:2017+A11: 2020

Electromagnetic compatibility of multimedia equipment – Immunity requirements

Report Reference No. : LCSA052422076E

Date of Issue..... : May 25, 2022

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ... : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method **Applicant's Name..... : Bravour Deutschland GmbH**

Address : Alt-Heerdt 104, 40549 Düsseldorf, Deutschland

Test SpecificationStandard : EN 55032:2015+A11:2020
EN 55035:2017+A11: 2020
EN IEC 61000-3-2:2019
EN 61000-3-3: 2013+A1:2019


Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Multi-ports USB Charging HUBTrade Mark : 
BRAVOUR
STAND OUT & IMPRESS

Test Model..... : B-20

Ratings : Please Refer To Page 9

Result : Positive**Compiled by:**

Cindy Nie

Supervised by:

Baron Wen

Approved by:

Gavin Liang

Cindy Nie/ File administrators

Baron Wen/Technique principal

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EMC -- TEST REPORT

Test Report No. : LCSA052422076E	<u>May 25, 2022</u> Date of issue
-----------------------------------------	--------------------------------------

Test Model : B-20
EUT..... : Multi-ports USB Charging HUB
Applicant : Bravour Deutschland GmbH Address..... : Alt-Heerdt 104, 40549 Düsseldorf, Deutschland Telephone..... : / Fax..... : /
Manufacturer : GULA (SHENZHEN) TECHNOLOGY CO., LTD. Address..... : 4F, Longsheng Shidai Building, Gongye Road, Longhua District, Shenzhen, China Telephone..... : / Fax..... : /
Factory : GULA (SHENZHEN) TECHNOLOGY CO., LTD. Address..... : 4F, Longsheng Shidai Building, Gongye Road, Longhua District, Shenzhen, China Telephone..... : / Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Revision	Issue Date	Revisions Content	Revised By
000	May 25, 2022	Initial Issue	/

Remark:

Original Test Report "LCS220408088AE" dated April 24, 2022.

The original report :

Applicant: GULA (SHENZHEN) TECHNOLOGY CO., LTD.

Address: 4F, Longsheng Shidai Building, Gongye Road, Longhua District, Shenzhen, China

Trade Mark: LADAGOGO

Now change to:

Applicant: Bravour Deutschland GmbH

Address: Alt-Heerdt 104, 40549 Düsseldorf, Deutschland



Trade Mark: BRAVOUR
STAND OUT & IMPRESS

This co-license test report is based on the test raw-data of original test report, after construction/information review and verification, no additional tests were considered necessary.





TABLE OF CONTENTS

Test Report Description	Page
1. TEST STANDARDS	6
2.SUMMARY OF STANDARDS AND RESULTS	7
2.1. DESCRIPTION OF STANDARDS AND RESULTS.....	7
2.2. DESCRIPTION OF PERFORMANCE CRITERIA.....	8
3. GENERAL INFORMATION	9
3.1. DESCRIPTION OF DEVICE (EUT).....	9
3.2. SUPPORT EQUIPMENT LIST.....	9
3.3. DESCRIPTION OF TEST FACILITY.....	10
3.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	10
3.5. MEASUREMENT UNCERTAINTY.....	10
4. MEASURING DEVICES AND TEST EQUIPMENT	11
5. TEST RESULTS.....	13
5.1. POWER LINE CONDUCTED EMISSION MEASUREMENT	13
5.2. RADIATED EMISSION MEASUREMENT	15
5.3. HARMONIC CURRENT EMISSION MEASUREMENT	17
5.4. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT	18
5.5. ELECTROSTATIC DISCHARGE IMMUNITY TEST	19
5.6. RF FIELD STRENGTH SUSCEPTIBILITY TEST	21
5.7. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	23
5.8. SURGE IMMUNITY TEST	25
5.9. INJECTED CURRENTS SUSCEPTIBILITY TEST	27
5.10. MAGNETIC FIELD SUSCEPTIBILITY TEST	29
5.11. VOLTAGE DIPS AND INTERRUPTIONS TEST	30
ANNEX A.....	31
ANNEX B.....	36
ANNEX C.....	51





1. TEST STANDARDS

The tests were performed according to following standards:

EN 55032:2015+A11:2020 Electromagnetic compatibility of multimedia equipment - Emission Requirements

EN 55035:2017+A11: 2020 Electromagnetic compatibility of multimedia equipment – Immunity requirements

EN IEC 61000-3-2:2019 Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase)

EN 61000-3-3: 2013+A1:2019 Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection





2.SUMMARY OF STANDARDS AND RESULTS

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

Emission (EN 55032:2015+A11:2020)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55032:2015+A11:2020	Class B	PASS
Conducted disturbance at telecommunication port	EN 55032:2015+A11:2020	Class B	N/A
Radiated disturbance	EN 55032:2015+A11:2020	Class B	PASS
Harmonic current emissions	EN IEC 61000-3-2:2019	Class A	PASS
Voltage fluctuations & flicker	EN 61000-3-3: 2013+A1:2019	-----	PASS
Immunity (EN 55035:2017+A11: 2020)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2006+A2: 2010	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4: 2012	B	PASS
Surge (Input a.c. power ports)	EN 61000-4-5: 2014+A1: 2017	B	PASS
Surge (Telecommunication ports)		B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2014+A1:2015	A	PASS
Power frequency magnetic field	EN 61000-4-8: 2010	A	PASS
Voltage dips, >95% reduction	EN IEC 61000-4-11:2020+AC: 2020	B	PASS
Voltage dips, 30% reduction		C	PASS
Voltage interruptions		C	PASS

***Note: N/A is an abbreviation for Not Applicable.

Test mode:		
Mode 1	Full Load	Record
Mode 2	Half Load	Pre-scan
Mode 3	No load	Pre-scan

***Note: All test modes were tested, but we only recorded the worst case in this report.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





2.2. Description of Performance Criteria

General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;

2.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

2.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

2.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



3. GENERAL INFORMATION

3.1. Description of Device (EUT)

EUT : Multi-ports USB Charging HUB

Trade Mark : 
BRAVOUR
STAND OUT & IMPRESS

Test Model : B-20

Additional Model : B-04, B-07, B-10, B-30, A-10, A-16, A-20, A-28, A-30, A-20B, A-32, A-40, A-50, A-64, C-08, C-10, C-16, MC-10, MC-16, MC-20, C-20, C-30, C-40, C-60, C-80, C-100

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested

Power Supply : Input: AC 100-240V, 50/60Hz
Output: DC 5V, 2.4A

Highest internal freq. : $F_x \leq 108\text{MHz}$

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108\text{ MHz}$ $108\text{ MHz} < F_x \leq 500\text{ MHz}$ $500\text{ MHz} < F_x \leq 1\text{ GHz}$ $F_x > 1\text{ GHz}$	1 GHz 2 GHz 5 GHz $5 \times F_x$ up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies. NOTE 2 Fx is defined in EN 55032 Section 3.1.19. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz	

3.2. Support Equipment List

Name	Manufacturers	M/N	S/N
--	--	--	--





3.3. Description of Test Facility

NVLAP Accreditation Code is 600167-0.
 FCC Designation Number is CN5024.
 CAB identifier is CN0071.
 CNAS Registration Number is L4595.

3.4. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

3.5. Measurement Uncertainty

Test	Parameters	Expanded uncertainty (U_{lab})	Expanded uncertainty (U_{cisp})
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Power Disturbance	Level accuracy (30MHz to 300MHz)	± 2.90 dB	± 4.5 dB
Electromagnetic Radiated Emission (3-loop)	Level accuracy (9kHz to 30MHz)	± 3.60 dB	± 3.3 dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	± 3.68 dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB
Mains Harmonic	Voltage	$\pm 0.510\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 0.510\%$	N/A
EMF	/	$\pm 21.59\%$	N/A
1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus. 2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.			



**4. MEASURING DEVICES AND TEST EQUIPMENT**

LINE CONDUCTED EMISSION						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
2	EMI Test Receiver	R&S	ESR3	102312	2022-02-18	2023-02-17
3	Artificial Mains	R&S	ENV216	101119	2021-06-21	2022-06-20
4	Pulse Limiter	R&S	ESH3-Z2	102750-NB	2021-08-19	2022-08-18
5	Impedance Stabilization Network	TESEQ	ISN T800	45130	2021-11-16	2022-11-15

RADIATED DISTURBANCE						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	E3	E3-EMC	/	N/A	N/A
2	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
3	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
4	EMI Test Receiver	R&S	ESR3	102311	2021-08-19	2022-08-18
5	Broadband Preamplifier	/	BP-01M18G	P190501	2021-06-21	2022-06-20

VOLTAGE FLUCTUATION AND FLICKER/HARMONIC CURRENT EMISSIONS						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	HARMONICS&FLICKER MEASUREMENT SYSTEM	EVERFINE	HFM-3000	P630850CD1411116	2022-02-08	2023-02-07
2	HARMONICS&FLICKER TESTING POWER SOURCE	EVERFINE	HFS-4000	P624486CD1411124	2022-02-08	2023-02-07

RF ELECTROMAGNETIC FIELD)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESG Vector Signal Generator	Agilent	E4438C	MY42081396	2021-06-11	2022-06-10
2	RF POWER AMPLIFIER	OPHIR	5225R	1052	NCR	NCR
3	RF POWER AMPLIFIER	OPHIR	5273F	1019	NCR	NCR
4	Stacked Broadband Log Periodic Antenna	SCHWARZBEC K	STLP 9128	9128ES-145	NCR	NCR
5	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBEC K	STLP 9149	9149-484	NCR	NCR
6	Electric field probe	Narda S.TS./PMM	EP601	611WX80208	2021-06-29	2022-06-28

Note: NCR means no calibration requirement



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**ELECTROSTATIC DISCHARGE**

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	SCHLODER	SESD 230	604035	2021-07-28	2022-07-27

ELECTRICAL FAST TRANSIENT IMMUNITY

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Immunity Simulative Generator	EM TEST	UCS500-M4	0101-34	2021-06-21	2022-06-20

SURGES, LINE TO LINE AND LINE TO GROUND

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Immunity Simulative Generator	EM TEST	UCS500-M4	0101-34	2021-06-21	2022-06-20

RF COMMON MODE

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Simulator	FRANKONIA	CIT-10/75	A126A1195	2021-08-19	2022-08-18
2	CDN	FRANKONIA	CDN-M2+M3	A2210177	2021-06-21	2022-06-20
3	6dB Attenuator	FRANKONIA	DAM25W	1172040	2021-06-21	2022-06-20

MAGNETIC FIELD SUSCEPTIBILITY TEST

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power frequency mag-field generator System	EVERFINE	EMS61000-8K	906003	2021-06-21	2022-06-20

VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2021-06-21	2022-06-20



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

5. TEST RESULTS

5.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

5.1.1. Block Diagram of Test Setup

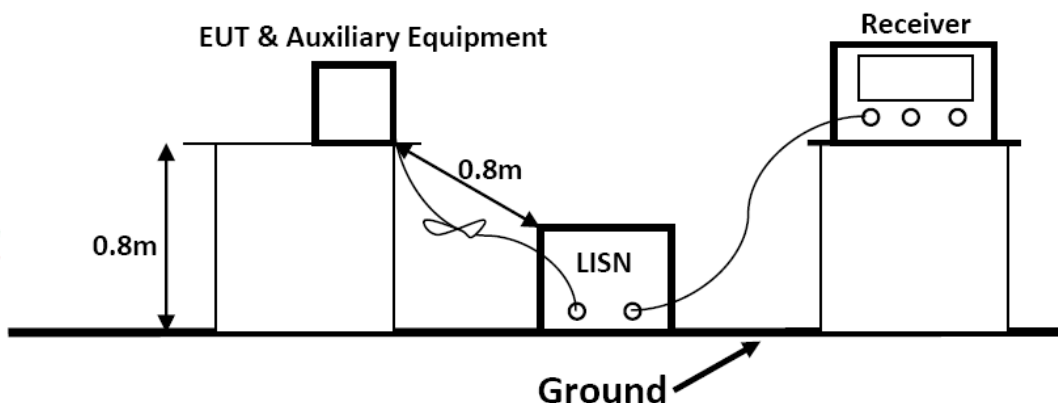

5.1.2. Test Standard

EN 55032:2015+A11:2020 Class B

Power Line Conducted Emission Limits (Class B)		
Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.1.3. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the EN 55032 requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.1.4. Operating Condition of EUT

- 5.1.4.1. Setup the EUT as shown on Section 5.1.1
- 5.1.4.2. Turn on the power of all equipments.
- 5.1.4.3. Let the EUT work in measuring mode(1) and measure it.





5.1.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided 50-ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter is set at 9kHz in 150kHz~30MHz.

The frequency range from 150kHz to 30MHz is investigated.

5.1.6. Test Results

PASS.

Refer to attached Annex B.1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




5.2. RADIATED EMISSION MEASUREMENT

5.2.1. Block Diagram of Test Setup

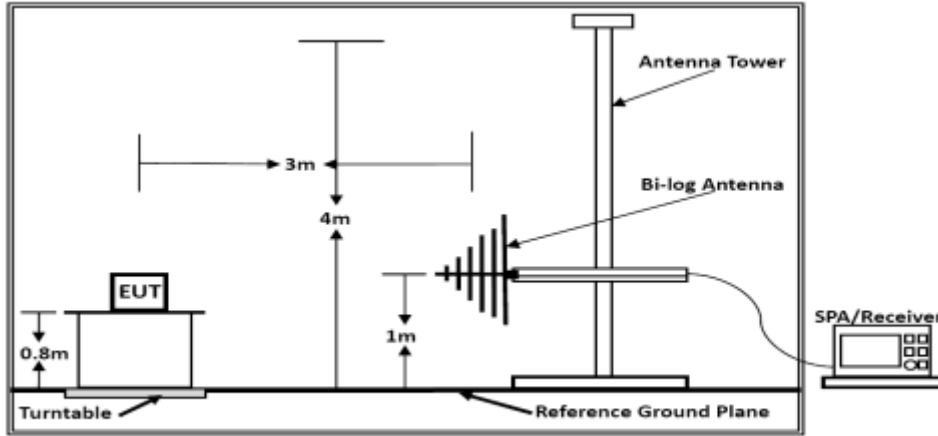

Below 1GHz

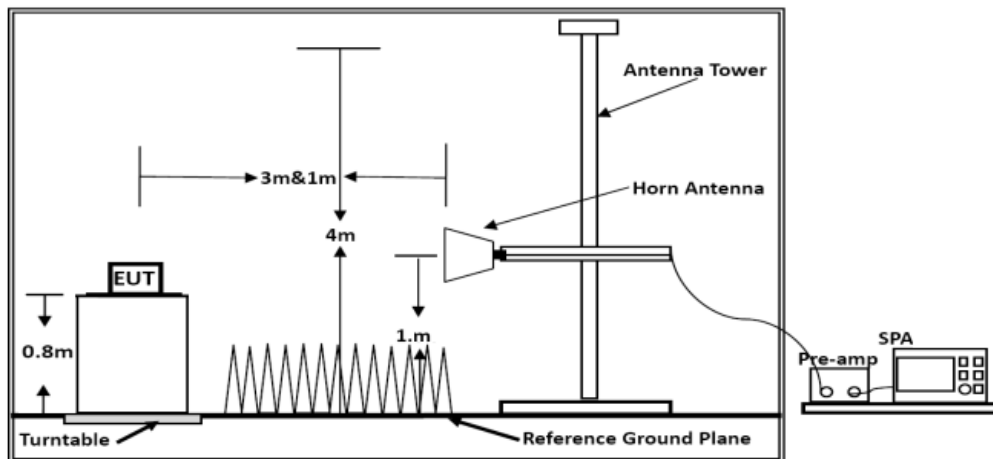

Above 1GHz

5.2.2. Test Standard

EN 55032:2015+A11:2020 Class B

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:





Limits for Radiated Emission Below 1GHz			
Frequency (MHz)	Distance (Meters)	Field Strengths Limit (dB μ V/m)	
30 ~ 230	3	40	
230 ~ 1000	3	47	
***Note: (1) The smaller limit shall apply at the combination point between two frequency bands. (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.			
Limits for Radiated Emission Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
***Note: The lower limit applies at the transition frequency.			

5.2.3. EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

5.2.4. Operating Condition of EUT

5.2.4.1. Turn on the power.

5.2.4.2. Let the EUT work in the test mode(1) and measure it.

5.2.5. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the EMI test receiver is set at RBW/VBW=120kHz/300kHz and the frequency range from 30MHz to 1000MHz is checked.

The bandwidth of the Spectrum analyzer is set at RBW/VBW=1MHz/3MHz and the frequency range from 1GHz to the frequency which about 5th carrier harmonic or 6GHz is checked.

5.2.6. Test Results

PASS.

Refer to attached Annex B.2



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.3. HARMONIC CURRENT EMISSION MEASUREMENT

5.3.1. Block Diagram of Test Setup

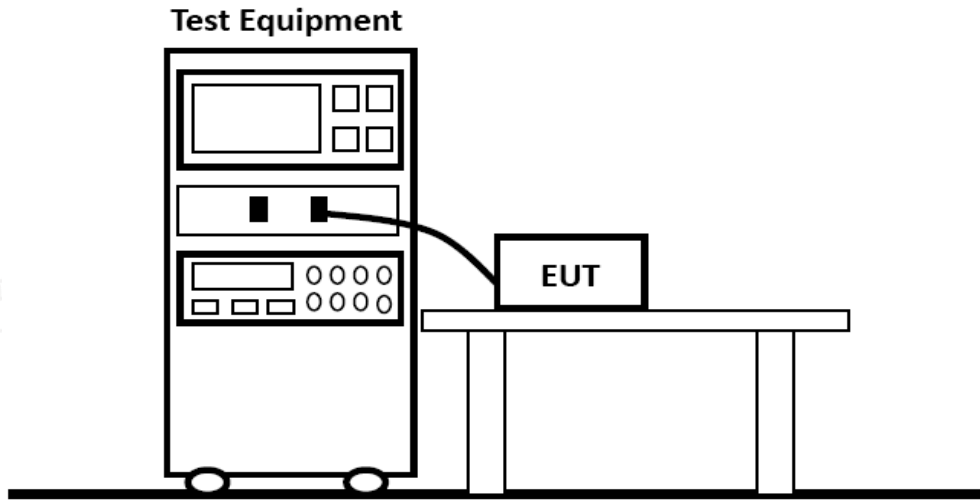

5.3.2. Test Standard

EN IEC 61000-3-2:2019

5.3.3. Operating Condition of EUT

Same as Section 5.2.4, except the test setup replaced as Section 5.3.1.

5.3.4. Test Results

PASS.


Refer to attached Annex B.3





5.4. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

5.4.1. Block Diagram of Test Setup

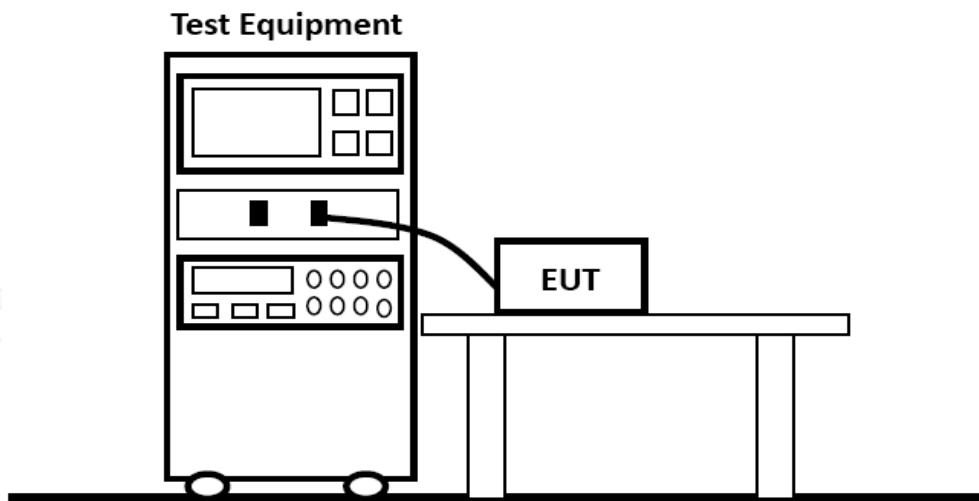

5.4.2. Test Standard

EN 61000-3-3: 2013+A1:2019

5.4.3. Operating Condition of EUT

Same as Section 5.2.4, except the test setup replaced as Section 5.4.1.

5.4.4. Test Results


PASS.

Refer to attached Annex B.4



5.5. ELECTROSTATIC DISCHARGE IMMUNITY TEST

5.5.1. Block Diagram of Test Setup

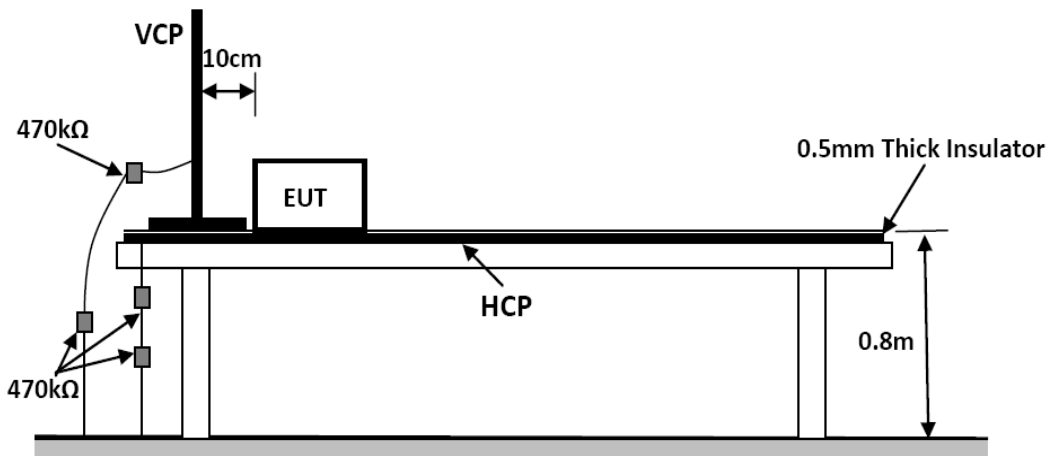

5.5.2. Test Standard

EN 55035:2017+A11: 2020 (EN 61000-4-2: 2009, Severity Level: 3 / Air Discharge: $\pm 8\text{KV}$, Level: 2 / Contact Discharge: $\pm 4\text{KV}$)

5.5.3. Severity Levels and Performance Criterion

5.5.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1	± 2	± 2
2	± 4	± 4
3	± 6	± 8
4	± 8	± 15
X	Special	Special

5.5.3.2. Performance Criterion

Performance Criterion: B

5.5.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.5.1.

5.5.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 5.1.4. Except the test set up replaced by Section 5.5.1.





5.5.6. Test Procedure

5.2.6.1. Air Discharge

This test is done on a non-conductive surfaces. The round discharge tip of the Electrostatic Discharge simulator shall be approached as fast as possible then to touch the EUT. After each discharge, the simulator shall be removed from the EUT. The simulator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

5.2.6.2. Contact Discharge

All the procedure shall be same as air discharge, except using the acute discharge tip. The top end of the Electrostatic Discharge simulator is touch the EUT all the time when the simulator is re-triggered for a new single discharge and repeated 10 times for each pre-selected test point.

5.2.6.3. Indirect Discharge For Horizontal Coupling Plane

The vertical coupling plane(VCP) is placed 0.1m away from EUT. The top end of Electrostatic Discharge simulator should aim at the center of one border of the VCP for at least 25 times discharge.

5.2.6.4. Indirect Discharge For Vertical Coupling Plane

The top end of Electrostatic Discharge simulator should place at the point 0.1m away from EUT on the horizontal coupling plane(HCP). At least 25 times discharge should be done for every pre-selected point around EUT.

Record any performance degradation of the EUT during the test and judge the test result according to ce criterion.

5.5.7. Test Results

PASS.

Refer to attached Annex B.5



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

5.6. RF FIELD STRENGTH SUSCEPTIBILITY TEST

5.6.1. Block Diagram of Test Setup

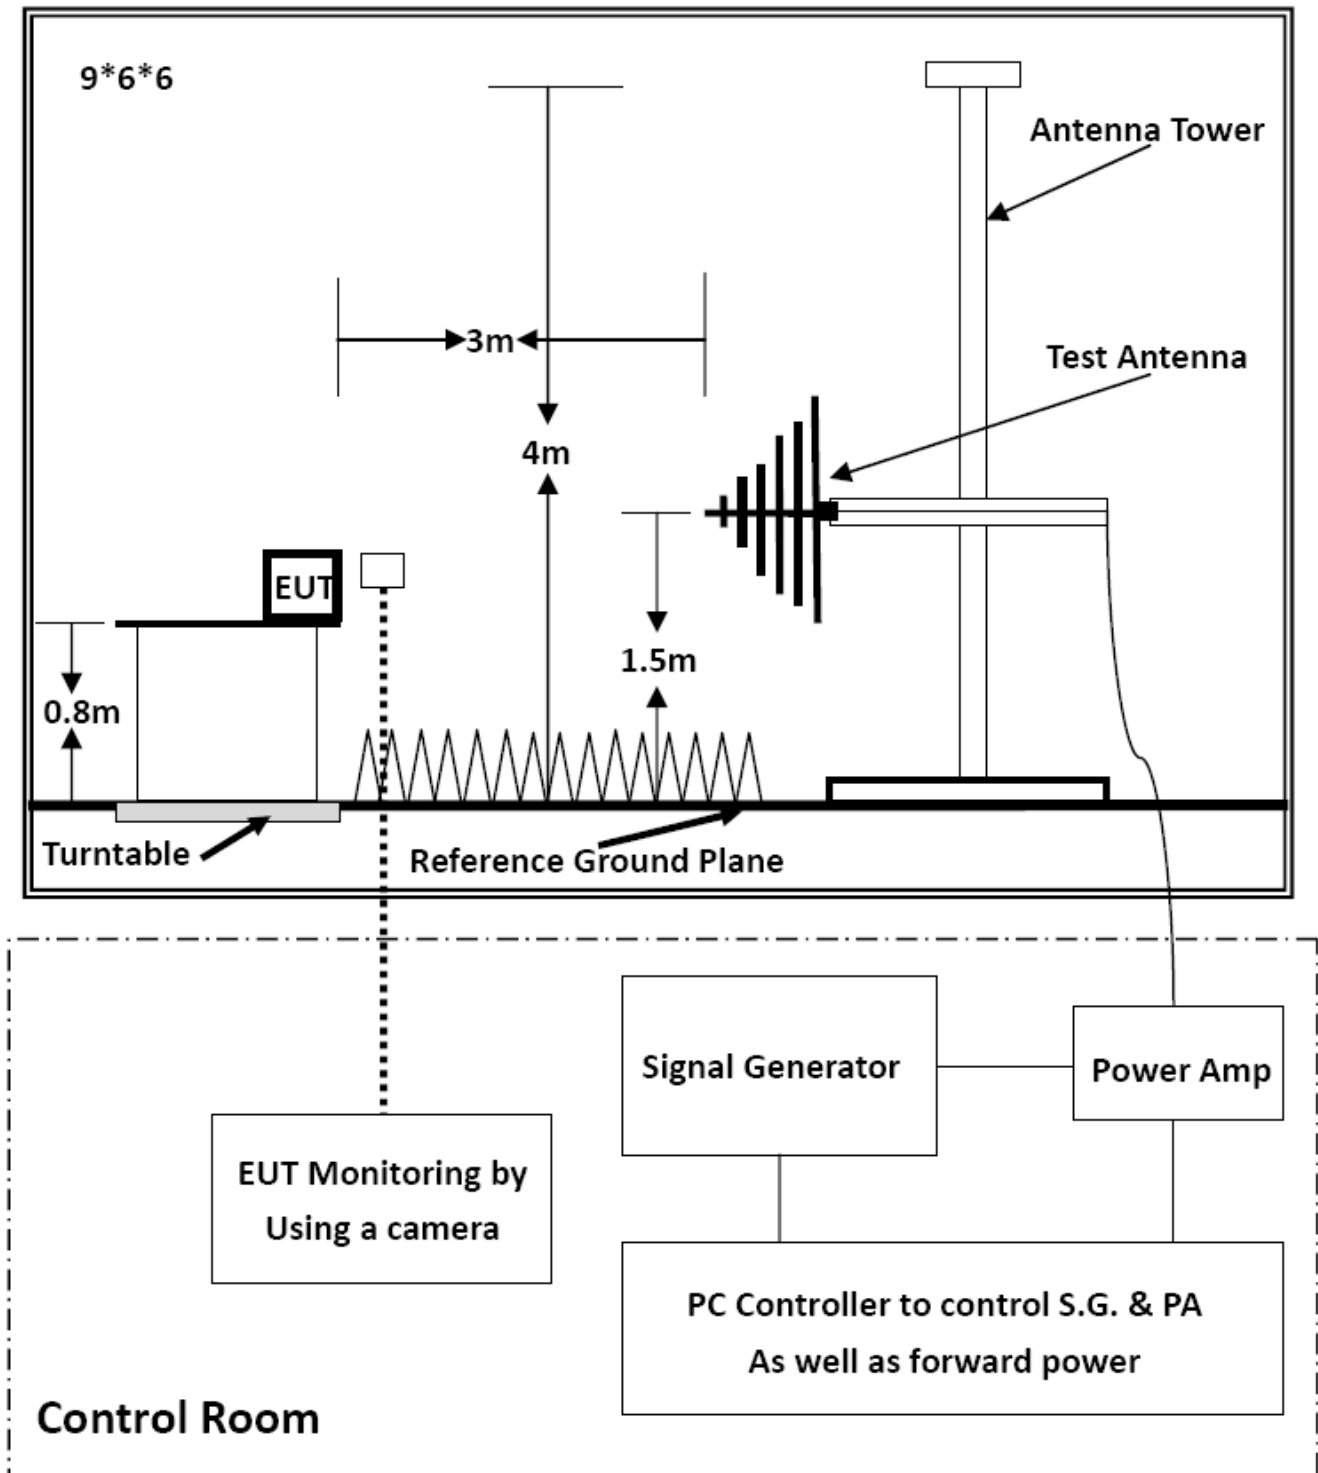



5.6.2. Test Standard

EN 55035:2017+A11: 2020 (EN 61000-4-3: 2006+A2: 2010 Severity Level: 2, 3V/m)

5.6.3. Severity Levels and Performance Criterion

5.6.3.1. Severity level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	1

5.6.3.2. Performance Criterion

Performance Criterion: A

5.6.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.6.1.

5.6.5. Operating Condition of EUT

Same as radiated emission measurement, which is listed in Section 5.2..4, except the test setup replaced as Section 5.6.1.

5.6.6. Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD Recording is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Unmodulated
Test Frequency Range (swept test)	80-1000MHz
Test Frequency (spot test)	1800MHz, 2600MHz, 3500MHz, 5000MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	3 Sec.

5.6.7. Test Results

PASS.

Refer to attached Annex B.6



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

5.7. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

5.7.1. Block Diagram of Test Setup

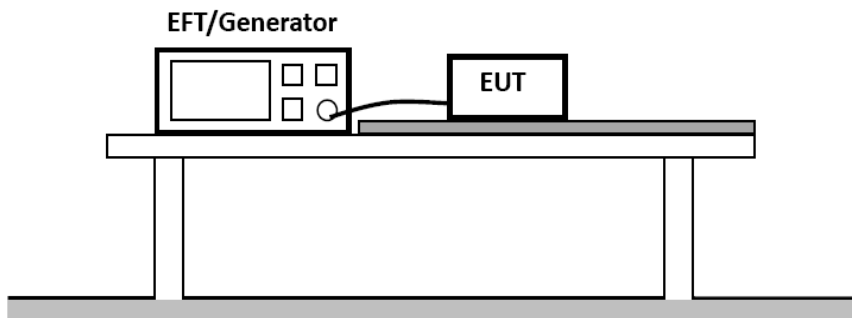

5.7.2. Test Standard

EN 55035:2017+A11: 2020 (EN 61000-4-4: 2012, Severity Level, Level 2: 1KV)

5.7.3. Severity Levels and Performance Criterion

5.7.3.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 KV	0.25 KV
2	1 KV	0.5 KV
3	2 KV	1 KV
4	4 KV	2 KV
X	Special	Special

5.7.3.2. Performance Criterion

Performance Criterion: B

5.7.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.7.1.

5.7.5. Operating Condition of EUT

5.7.5.1. Setup the EUT as shown in Section 5.7.1.

5.7.5.2. Turn on the power of all equipments.

5.7.5.3. Let the EUT work in test mode(1) and measure it.





5.7.6. Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

5.7.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 1 mins.

5.7.6.2. For signal lines and control lines ports:

It's unnecessary to test.

5.7.6.3. For DC output line ports:

It's unnecessary to test.

5.7.7. Test Results

PASS.


Refer to attached Annex B.7





5.8. SURGE IMMUNITY TEST

5.8.1. Block Diagram of Test Setup

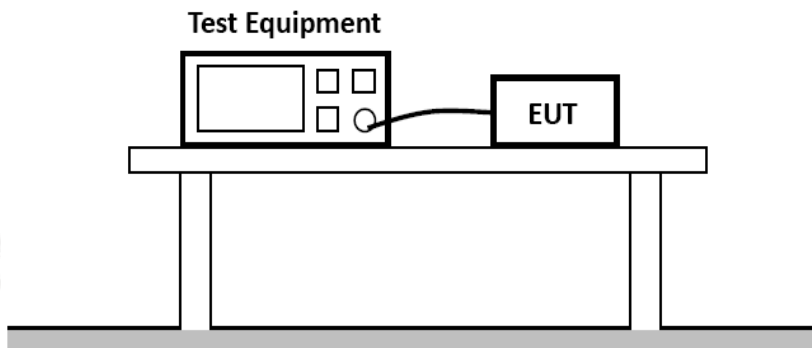

5.8.2. Test Standard

EN 55035:2017+A11: 2020 (EN 61000-4-5: 2014+A1: 2017, Severity Level: Line to Line: Level 2, 1.0KV, Line to Earth: Level 3, 2.0KV)

5.8.3. Severity Levels and Performance Criterion

5.8.3.1. Severity level

Severity Level	Open-Circuit Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

5.8.3.2. Performance Criterion

Performance Criterion: B

5.8.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.8.1.

5.8.5. Operating Condition of EUT

5.8.5.1. Setup the EUT as shown in Section 5.8.1.

5.8.5.1. Turn on the power of all equipments.

5.8.5.1. Let the EUT work in test mode (1) and measure it.





5.8.6. Test Procedure

5.8.6.1. Set up the EUT and test generator as shown on Section 5.8.1.

5.8.6.2. For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

5.8.6.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

5.8.6.4. Different phase angles are done individually.

5.8.6.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

5.8.7. Test Results


PASS.

Refer to attached Annex B.8



5.9. INJECTED CURRENTS SUSCEPTIBILITY TEST

5.9.1. Block Diagram of Test Setup

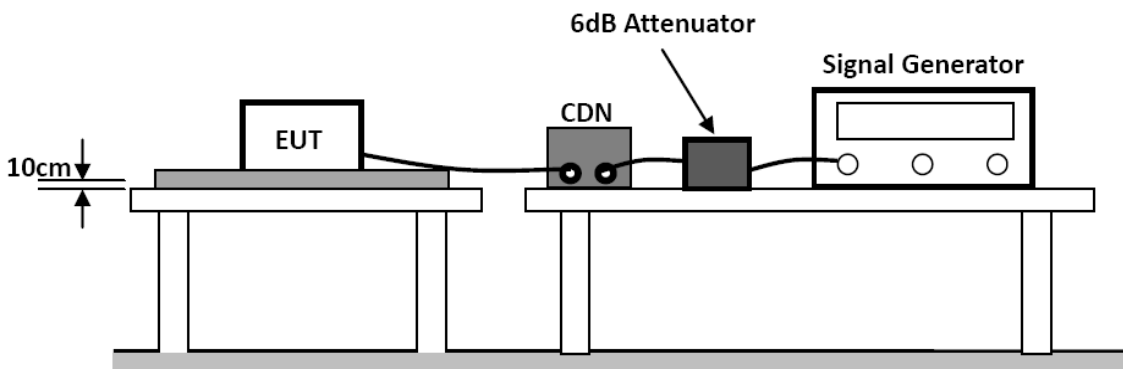

5.9.2. Test Standard

EN 55035:2017+A11: 2020(EN 61000-4-6: 2014+A1:2015, Severity Level: Level 2, (0.15MHz ~ 80MHz))

5.9.3. Severity Levels and Performance Criterion

5.9.3.1. Severity level

Level	Field Strength (V)
1	1
2	3
3	10
X	Special

5.9.3.2. Performance Criterion

Performance Criterion: A

5.9.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.9.1.

5.9.5. Operating Condition of EUT

5.9.5.1. Setup the EUT as shown in Section 5.9.1.

5.9.5.2. Turn on the power of all equipments.

5.9.5.3. Let the EUT work in test mode(1) and measure it.





5.9.6. Test Procedure

- 5.9.6.1. Set up the EUT, CDN and test generators as shown on Section 5.9.1.
- 5.9.6.2. Let the EUT work in test mode and measure it.
- 5.9.6.3. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 5.9.6.4. The disturbance signal described below is injected to EUT through CDN.
- 5.9.6.5. The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 5.9.6.6. The frequency range is swept from 150kHz to 10MHz using 3V signal level, 10MHz to 30MHz using 3V to 1V signal level, 30MHz to 80MHz using 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 5.9.6.7. The rate of sweep shall not exceed 1.5×10^{-3} decades/s. where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 5.9.6.8. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

5.9.7. Test Results


PASS.

Refer to attached Annex B.9



5.10. MAGNETIC FIELD SUSCEPTIBILITY TEST

5.10.1. Block Diagram of Test Setup

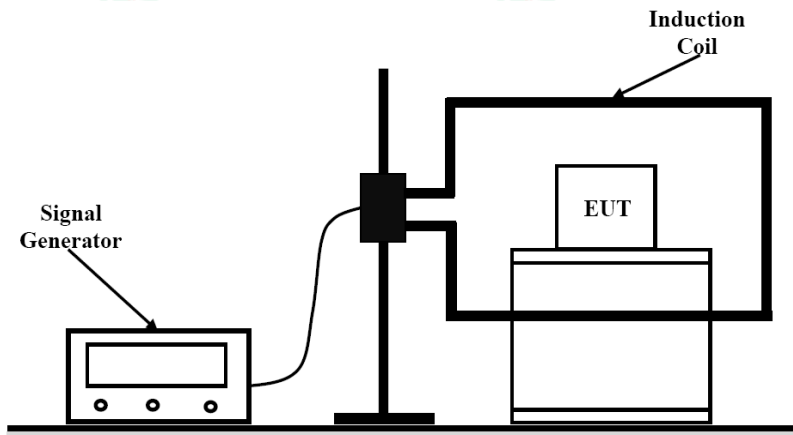

5.10.2. Test Standard

EN 55035:2017+A11: 2020 (EN 61000-4-8: 2010, Severity Level: Level 1, 1A/m)

5.10.3. Severity Levels and Performance Criterion

5.10.3.1. Severity level

Level	Field Strength (A/m)
1	1
2	3
3	10
4	30
5	100
X	Special

5.10.3.2. Performance Criterion

Performance Criterion: A

5.10.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.10.1.

5.10.5. Test Procedure

EUT is placed on an insulating support of 0.1m high above a table of 0.8m high. There is a minimum 1m*1m ground metallic plane put on this table. EUT is put in the center of the magnetic coil then two orientations of the magnetic coil, horizontal and vertical, shall be rotated in order to expose the EUT to the difference polarization magnetic field.

Record any performance degradation of the EUT during the test and judge the test result according to performance criterion.

5.10.6. Test Results


PASS.

Refer to attached Annex B.10



5.11. VOLTAGE DIPS AND INTERRUPTIONS TEST

5.11.1. Block Diagram of Test Setup

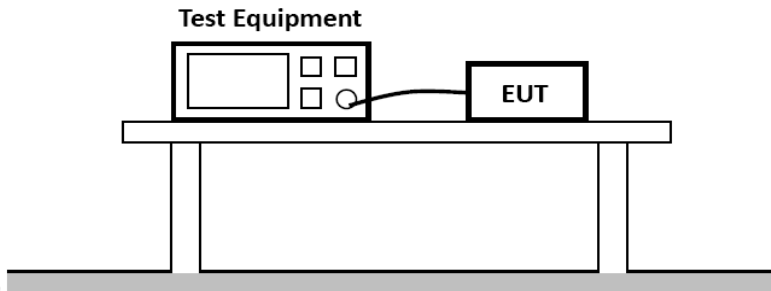

5.11.2. Test Standard

EN 55035:2017+A11: 2020 (EN IEC 61000-4-11:2020+AC: 2020)

5.11.3. Severity Levels and Performance Criterion

5.11.3.1. Severity level

Test Level		
Voltage Reduction %U _T	Voltage Dips %U _T	Duration (in Period)
100	0	0.5
100	0	1
30	70	5
Voltage Reduction %U _T	Voltage Dips %U _T	Duration (in Period)
100	0	250

5.11.3.2. Performance Criterion

Performance Criterion: B&C

5.11.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.11.1.

5.11.5. Operating Condition of EUT

5.11.5.1. Setup the EUT as shown in Section 5.11.1.

5.11.5.2. Turn on the power of all equipments.

5.11.5.3. Let the EUT work in test mode (1) and measure it.

5.11.6. Test Procedure

5.11.6.1. Set up the EUT and test generator as shown on Section 5.11.1.

5.11.6.2. The interruptions are introduced at selected phase angles with specified duration.

5.11.6.3. Record any degradation of performance.

5.11.7. Test Results

PASS.


Refer to attached Annex B.11






Annex A

(Test photograph)

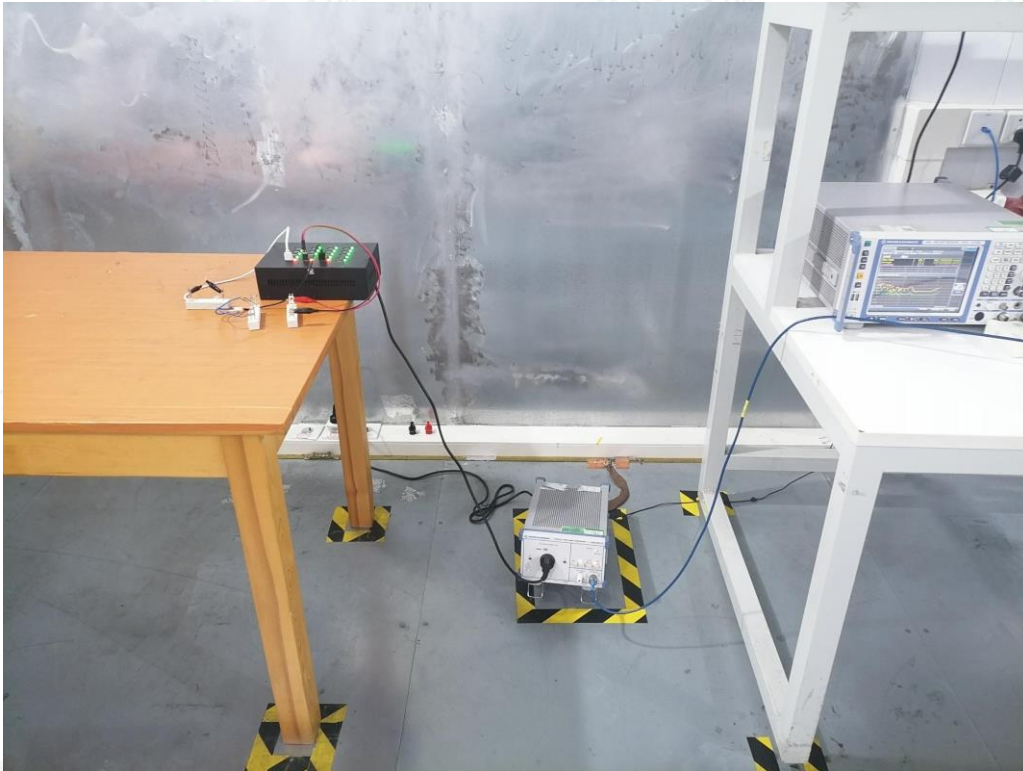

Test Setup Photo of Power Line Conducted Measurement

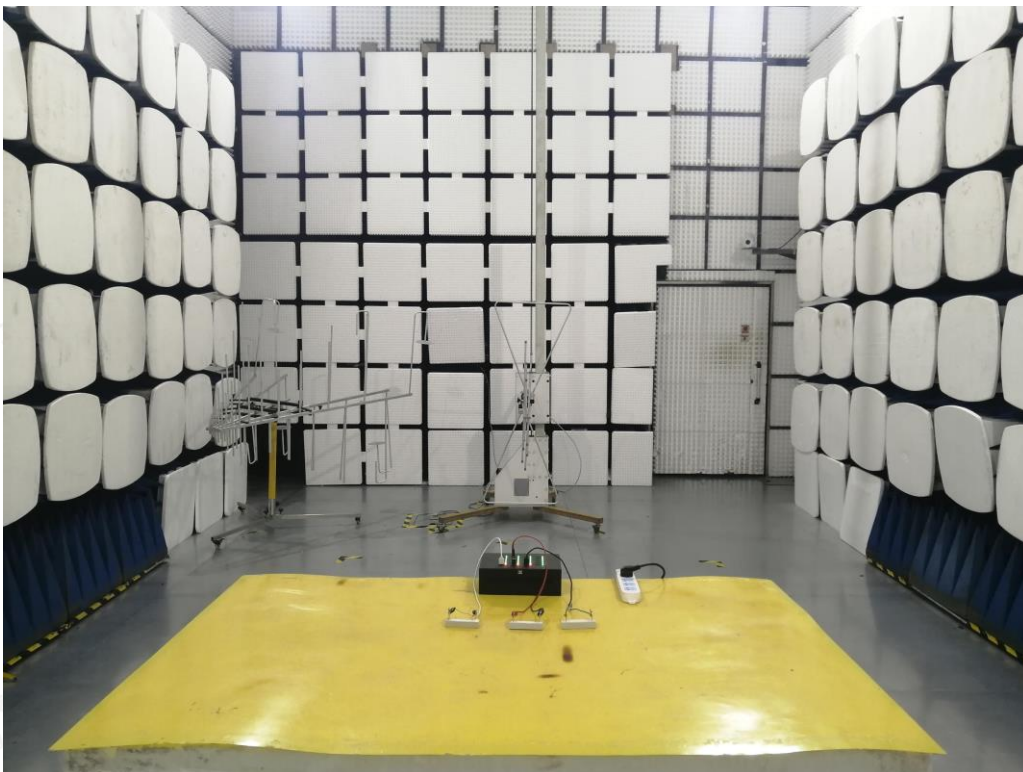


Test Setup Photo of Radiated Measurement (30MHz~1GHz)






Test Setup Photo of Harmonic & Flicker Measurement

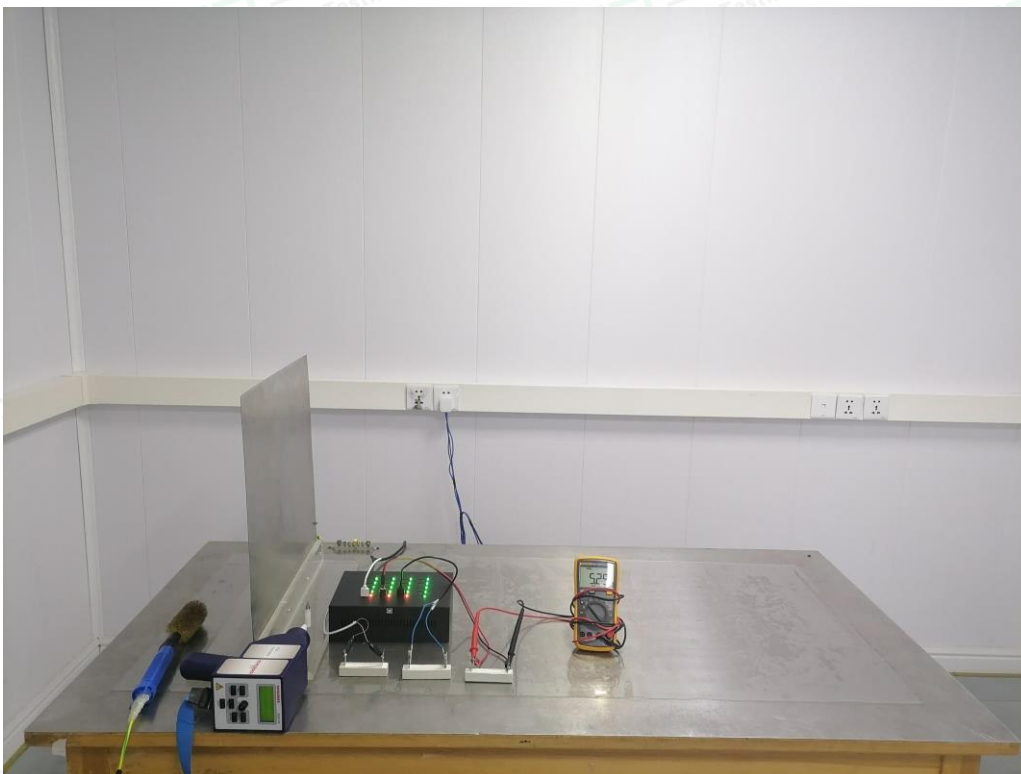

Test Setup Photo of Electrostatic Discharge Test



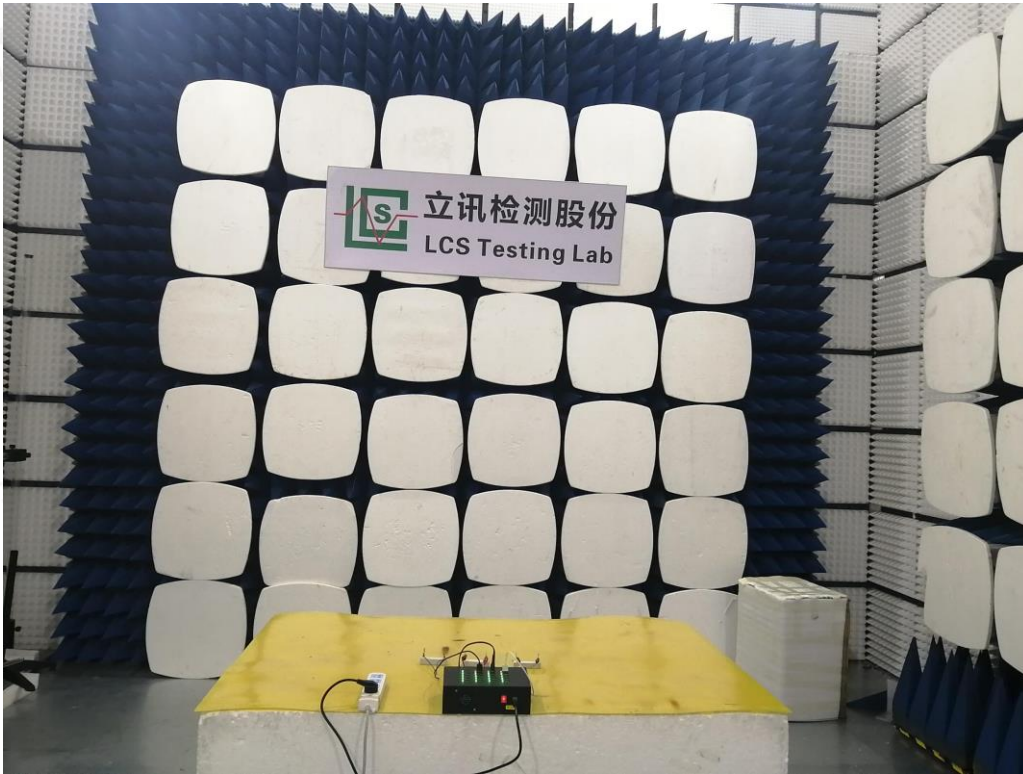

Test Setup Photo of RF Field Strength Susceptibility

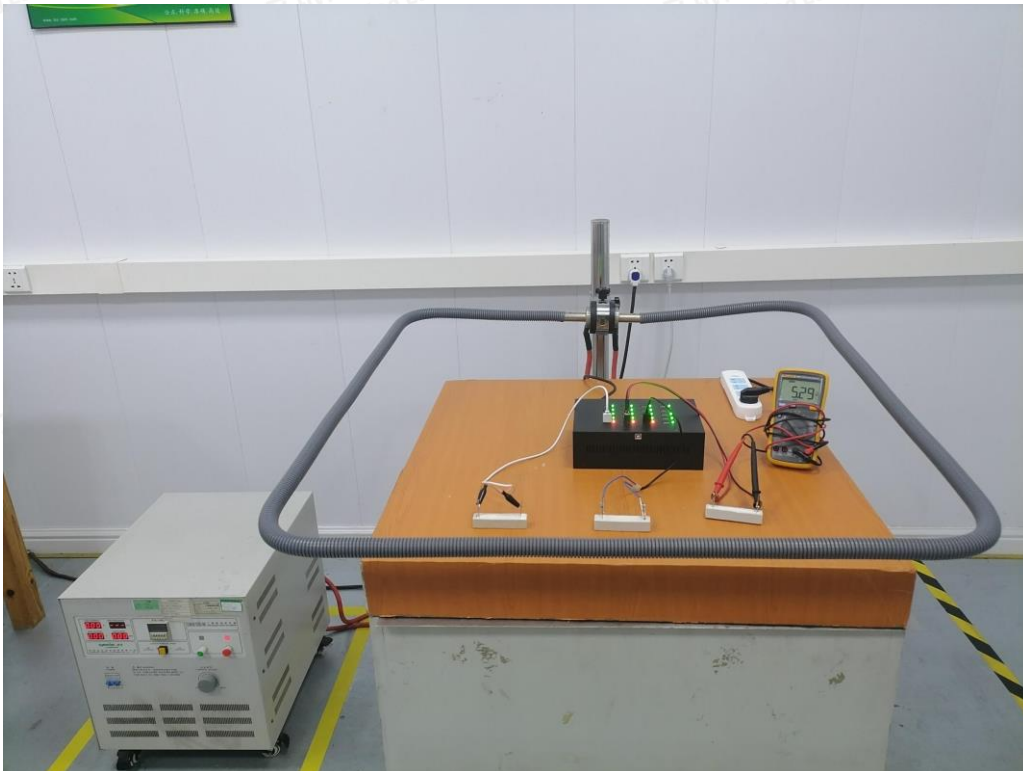


Photo of Electrical Fast Transient/Burst Test & Surge Immunity Test





Test Setup Photo of Injected Currents Susceptibility Test



Test Setup Photo of Magnetic Field Immunity Test





Test Setup Photo of Voltage Dips and Interruptions Test






ANNEX B

(Emission and Immunity test results)

B.1 POWER LINE CONDUCTED EMISSION MEASUREMENT

Environmental Conditions:	22.5°C, 53.7% RH
Test Voltage:	AC 230V,50Hz
Test Model:	B-20
Test Mode:	Mode 1
Test Engineer:	Zero Qi
Pol:	Line

Detailed results are shown below

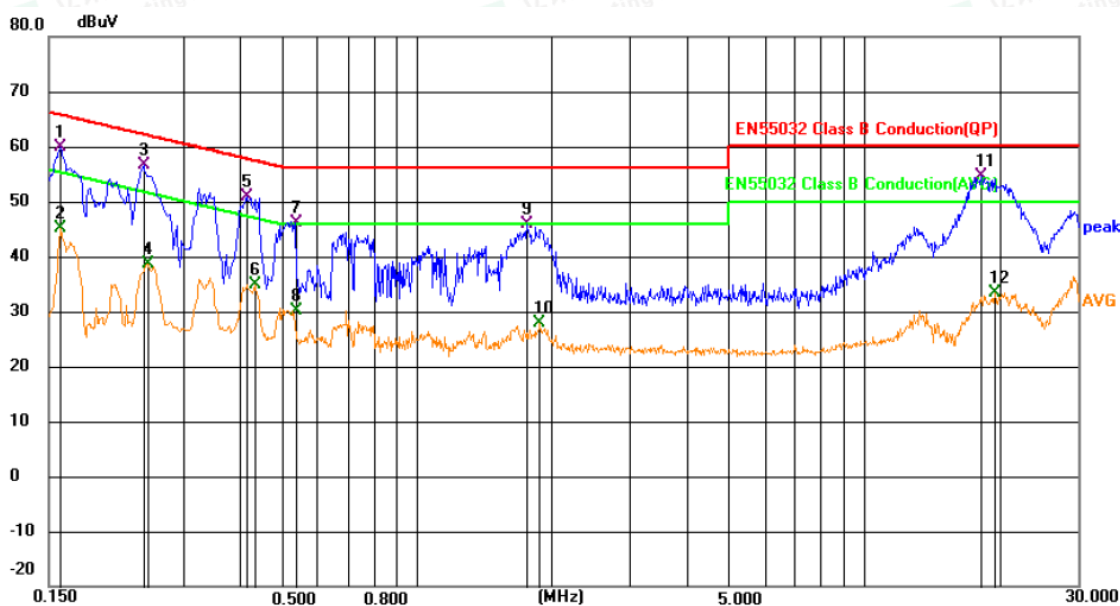


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1590	40.33	19.63	59.96	65.52	-5.56	QP	
2		0.1590	25.55	19.63	45.18	55.52	-10.34	AVG	
3		0.2446	37.00	19.63	56.63	61.94	-5.31	QP	
4		0.2491	19.10	19.63	38.73	51.79	-13.06	AVG	
5		0.4156	31.24	19.63	50.87	57.54	-6.67	QP	
6		0.4336	15.21	19.64	34.85	47.18	-12.33	AVG	
7		0.5325	26.40	19.65	46.05	56.00	-9.95	QP	
8		0.5325	10.38	19.65	30.03	46.00	-15.97	AVG	
9		1.7610	26.28	19.67	45.95	56.00	-10.05	QP	
10		1.8870	8.15	19.68	27.83	46.00	-18.17	AVG	
11		18.3211	34.36	20.16	54.52	60.00	-5.48	QP	
12		19.5406	13.09	20.19	33.28	50.00	-16.72	AVG	





Environmental Conditions:	22.5°C, 53.7% RH
Test Voltage:	AC 230V,50Hz
Test Model:	B-20
Test Mode:	Mode 1
Test Engineer:	Zero Qi
Pol:	Neutral

Detailed results are shown below

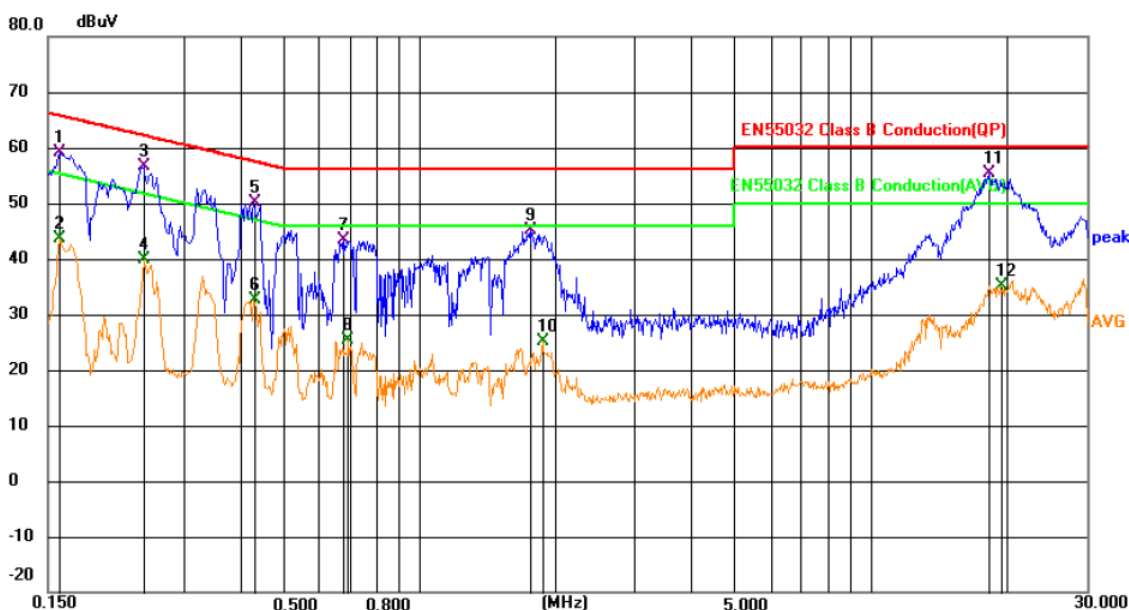


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1590	39.45	19.63	59.08	65.52	-6.44	QP	
2		0.1590	24.12	19.63	43.75	55.52	-11.77	AVG	
3		0.2446	37.00	19.63	56.63	61.94	-5.31	QP	
4		0.2446	20.19	19.63	39.82	51.94	-12.12	AVG	
5		0.4291	30.59	19.63	50.22	57.27	-7.05	QP	
6		0.4291	13.10	19.63	32.73	47.27	-14.54	AVG	
7		0.6809	23.67	19.65	43.32	56.00	-12.68	QP	
8		0.6945	5.69	19.65	25.34	46.00	-20.66	AVG	
9		1.7700	25.39	19.67	45.06	56.00	-10.94	QP	
10		1.8735	5.36	19.68	25.04	46.00	-20.96	AVG	
11		18.3166	35.14	20.16	55.30	60.00	-4.70	QP	
12		19.3831	14.99	20.19	35.18	50.00	-14.82	AVG	



**B.2 Radiated Disturbance Test Results (30MHz to 1000MHz)**

Environmental Conditions:	22.2°C, 52.8% RH
Test Voltage:	AC 230V,50Hz
Test Model:	B-20
Test Mode:	Mode 1
Test Engineer:	Li Bruce
Pol:	Vertical

Detailed results are shown below

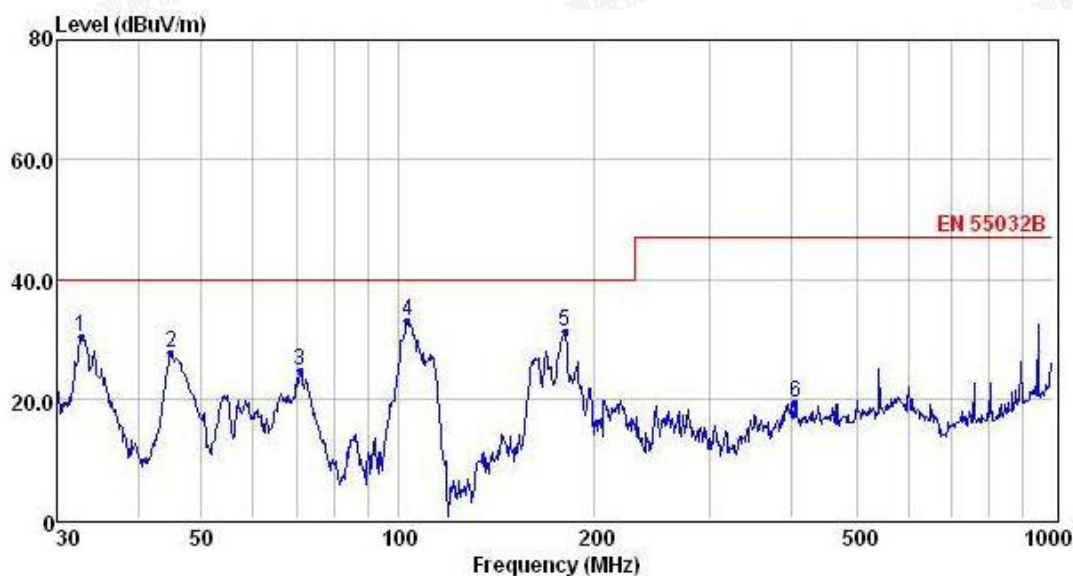

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	32.75	19.19	0.43	10.77	30.39	40.00	-9.61	QP
2	44.90	15.82	0.56	11.40	27.78	40.00	-12.22	QP
3	70.83	13.71	0.70	10.16	24.57	40.00	-15.43	QP
4	103.44	21.22	0.82	10.95	32.99	40.00	-7.01	QP
5	180.02	20.31	1.14	9.80	31.25	40.00	-8.75	QP
6	406.09	3.01	1.41	14.92	19.34	47.00	-27.66	QP


- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported





Environmental Conditions:	22.2°C, 52.8% RH
Test Voltage:	AC 230V,50Hz
Test Model:	B-20
Test Mode:	Mode 1
Test Engineer:	Li Bruce
Pol:	Horizontal

Detailed results are shown below

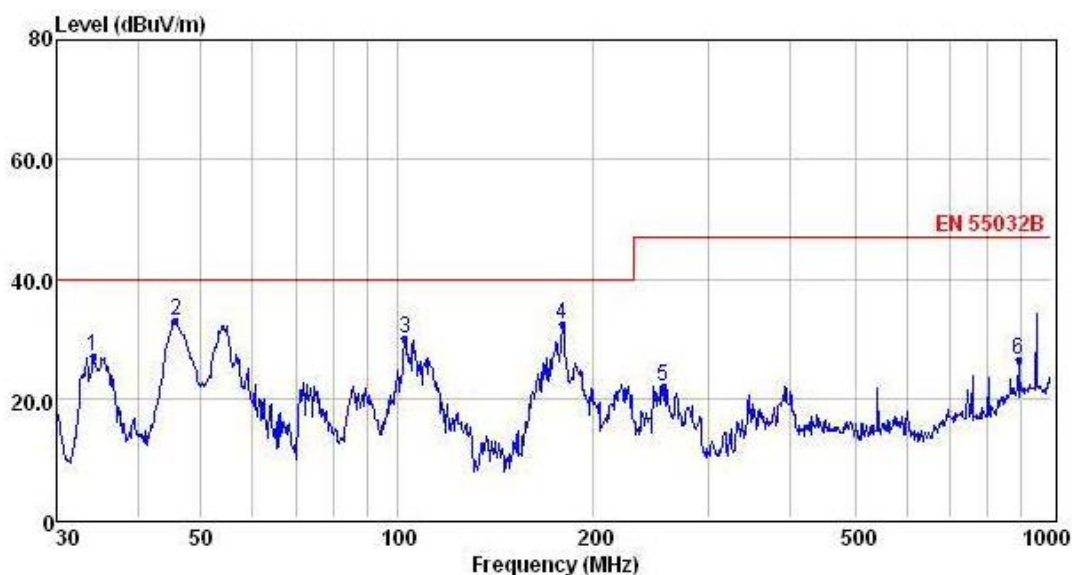

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.16	15.63	0.45	10.85	26.93	40.00	-13.07	QP
2	45.69	20.89	0.56	11.57	33.02	40.00	-6.98	QP
3	102.72	18.18	0.82	10.90	29.90	40.00	-10.10	QP
4	178.76	21.48	1.14	9.79	32.41	40.00	-7.59	QP
5	255.62	8.11	1.27	12.59	21.97	47.00	-25.03	QP
6	890.73	3.23	2.09	21.26	26.58	47.00	-20.42	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Customer : xxx Result : Pass

Total Current Harmonics and Some Odd Harmonic Parameters

THC (A)	0.0104	THD (%)	0.57	POHC (A)	0.0021	POHC Limit (A)	0.2514
---------	--------	---------	------	----------	--------	----------------	--------

Maximum Value of Relevant Parameter During Test Period

Urms (V)	229.95	Freq (Hz)	50.000
Irms (A)	1.8162	Ipeak(A)	2.6155
II (A)	1.8162	ICF	1.4418
P (W)	417.61	λ	1.0000

Determination of Harmonics and Limits

Order(n)	Harmonics Current Avg. (A)	100% Limit (A)	Limit Percent (%)	Harmonics Current Max. (A)	150% Limit (A)	Limit Percent (%)	Result
2	0.0028	1.0800		0.0034	1.6200		
3	0.0037	2.3000	0.16	0.0043	3.4500	0.12	Pass
4	0.0020	0.4300	0.47	0.0026	0.6450	0.40	Pass
5	0.0013	1.1400	0.11	0.0018	1.7100	0.11	Pass
6	0.0021	0.3000	0.70	0.0026	0.4500	0.58	Pass
7	0.0025	0.7700	0.32	0.0030	1.1550	0.26	Pass
8	0.0019	0.2300	0.83	0.0024	0.3450	0.70	Pass
9	0.0017	0.4000	0.43	0.0022	0.6000	0.37	Pass
10	0.0018	0.1840	0.98	0.0022	0.2760	0.80	Pass
11	0.0020	0.3300	0.61	0.0023	0.4950	0.46	Pass
12	0.0017	0.1533	1.11	0.0021	0.2300	0.91	Pass
13	0.0016	0.2100	0.76	0.0020	0.3150	0.63	Pass
14	0.0016	0.1314	1.22	0.0019	0.1971	0.96	Pass
15	0.0015	0.1500	1.00	0.0017	0.2250	0.76	Pass
16	0.0014	0.1150	1.22	0.0017	0.1725	0.99	Pass
17	0.0015	0.1324	1.13	0.0018	0.1985	0.91	Pass
18	0.0013	0.1022	1.27	0.0014	0.1533	0.91	Pass
19	0.0011	0.1184	0.93	0.0012	0.1776	0.68	Pass
20	0.0011	0.0920	1.20	0.0013	0.1380	0.94	Pass
21	0.0012	0.1071	1.12	0.0013	0.1607	0.81	Pass
22	0.0010	0.0836	1.20	0.0010	0.1255	0.80	Pass
23	0.0008	0.0978	0.82	0.0008	0.1467	0.55	Pass
24	0.0009	0.0767	1.17	0.0009	0.1150	0.78	Pass
25	0.0009	0.0900	1.00	0.0010	0.1350	0.74	Pass
26	0.0007	0.0708	0.99	0.0007	0.1062	0.66	Pass
27	0.0005	0.0833	0.60	0.0006	0.1250	0.48	Pass
28	0.0006	0.0657	0.91	0.0006	0.0986	0.61	Pass
29	0.0007	0.0776	0.90	0.0007	0.1164	0.60	Pass
30	0.0005	0.0613	0.82	0.0005	0.0920	0.54	Pass
31	0.0004	0.0726	0.55	0.0005	0.1089	0.46	Pass
32	0.0004	0.0575	0.70	0.0005	0.0863	0.58	Pass
33	0.0005	0.0682	0.73	0.0005	0.1023	0.49	Pass
34	0.0004	0.0541	0.74	0.0005	0.0812	0.62	Pass
35	0.0004	0.0643	0.62	0.0006	0.0964	0.62	Pass
36	0.0004	0.0511	0.78	0.0004	0.0767	0.52	Pass
37	0.0003	0.0608	0.49	0.0004	0.0912	0.44	Pass
38	0.0004	0.0484	0.83	0.0005	0.0726	0.69	Pass
39	0.0004	0.0577	0.69	0.0005	0.0865	0.58	Pass
40	0.0003	0.0460	0.65	0.0004	0.0690	0.58	Pass





Comments :

Customer : xxx

Result : Pass

Determination of Voltage Relevant Parameter During Test Period

Item	Nominal Value	Tested Value	Error Value	Allowable Error Value	Result
Urms (V)	230.00	229.93	0.07	±2.0%	Pass
Frequency (Hz)	50.000	50.001	0.001	±0.5%	Pass
CFU	1.4100	1.4152	0.0052	±0.01	Pass
Peak-Volt Phase	90.00	90.00	0.00	±3	Pass

Determination of Voltage Harmonics and Limits

Order(n)	UhdF	Limit(%)	Limit Percent (%)	Result
1	100%	---	---	---
2	0.01%	0.20	7.30%	Pass
3	0.01%	0.90	0.91%	Pass
4	0.00%	0.20	1.94%	Pass
5	0.00%	0.40	0.76%	Pass
6	0.00%	0.20	0.75%	Pass
7	0.00%	0.30	0.90%	Pass
8	0.00%	0.20	0.89%	Pass
9	0.01%	0.20	3.15%	Pass
10	0.00%	0.20	1.47%	Pass
11	0.00%	0.10	1.41%	Pass
12	0.00%	0.10	3.35%	Pass
13	0.00%	0.10	3.51%	Pass
14	0.00%	0.10	1.26%	Pass
15	0.00%	0.10	1.68%	Pass
16	0.00%	0.10	1.05%	Pass
17	0.00%	0.10	2.32%	Pass
18	0.00%	0.10	0.84%	Pass
19	0.00%	0.10	1.05%	Pass
20	0.00%	0.10	1.01%	Pass
21	0.00%	0.10	3.27%	Pass
22	0.00%	0.10	1.12%	Pass
23	0.00%	0.10	3.87%	Pass
24	0.00%	0.10	0.83%	Pass
25	0.00%	0.10	2.25%	Pass
26	0.00%	0.10	0.86%	Pass
27	0.00%	0.10	2.94%	Pass
28	0.00%	0.10	1.05%	Pass
29	0.00%	0.10	2.66%	Pass
30	0.00%	0.10	0.81%	Pass
31	0.00%	0.10	1.56%	Pass
32	0.00%	0.10	0.99%	Pass
33	0.00%	0.10	2.52%	Pass
34	0.00%	0.10	1.00%	Pass
35	0.00%	0.10	1.33%	Pass
36	0.00%	0.10	0.79%	Pass
37	0.00%	0.10	1.50%	Pass
38	0.00%	0.10	0.87%	Pass
39	0.00%	0.10	2.17%	Pass
40	0.00%	0.10	1.00%	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



B.4 VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

Test Model	B-20	Test Engineer	Hy Luo																																			
Test Voltage	AC 230V/50Hz																																					
Customer : xxx		Result : PASS																																				
<p>Pst and Limit</p> <p>Plt and Limit</p>																																						
<p>Relevant Parameter and Judgement During Test Period</p> <table border="1"> <tr> <td>Vrms at the end of test(V)</td> <td>229.97</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Error Max (%)</td> <td></td> <td>Test Limit (%)</td> <td></td> <td></td> </tr> <tr> <td>T-max (ms)</td> <td>0.00</td> <td>Test Limit (ms)</td> <td>500</td> <td>Pass</td> </tr> <tr> <td>dc (%)</td> <td>0.00</td> <td>Test Limit (%)</td> <td>3.30</td> <td>Pass</td> </tr> <tr> <td>dmax (%)</td> <td>0.00</td> <td>Test Limit (%)</td> <td>4.00</td> <td>Pass</td> </tr> <tr> <td>Pst</td> <td>0.00</td> <td>Test Limit</td> <td>1.00</td> <td>Pass</td> </tr> <tr> <td>Plt</td> <td>0.00</td> <td>Test Limit</td> <td>0.65</td> <td>Pass</td> </tr> </table>				Vrms at the end of test(V)	229.97				Error Max (%)		Test Limit (%)			T-max (ms)	0.00	Test Limit (ms)	500	Pass	dc (%)	0.00	Test Limit (%)	3.30	Pass	dmax (%)	0.00	Test Limit (%)	4.00	Pass	Pst	0.00	Test Limit	1.00	Pass	Plt	0.00	Test Limit	0.65	Pass
Vrms at the end of test(V)	229.97																																					
Error Max (%)		Test Limit (%)																																				
T-max (ms)	0.00	Test Limit (ms)	500	Pass																																		
dc (%)	0.00	Test Limit (%)	3.30	Pass																																		
dmax (%)	0.00	Test Limit (%)	4.00	Pass																																		
Pst	0.00	Test Limit	1.00	Pass																																		
Plt	0.00	Test Limit	0.65	Pass																																		





B.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST

Electrostatic Discharge Test Results

Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	Bravour Deutschland GmbH		
EUT	Multi-ports USB Charging HUB	Temperature	23.6°C
M/N	B-20	Humidity	53.2%
Criterion	B	Pressure	1021mbar
Test Mode	Mode 1	Test Engineer	Hy Luo

Air Discharge

Test Points	Test Levels			Results		
	± 2kV	± 4kV	± 8kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Contact Discharge

Test Points	Test Levels		Results		
	± 2 kV	±4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Discharge To Horizontal Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Discharge To Vertical Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



B.6 RF FIELD STRENGTH SUSCEPTIBILITY TEST

RF Field Strength Susceptibility Test Results

Standard	<input type="checkbox"/> IEC 61000-4-3 <input checked="" type="checkbox"/> EN 61000-4-3		
Applicant	Bravour Deutschland GmbH		
EUT	Multi-ports USB Charging HUB	Temperature	24.8°C
M/N	B-20	Humidity	53.7%
Field Strength	3 V/m	Criterion	A
Test Mode	Mode 1	Test Engineer	Hy Luo
Test Frequency	80MHz to 1000MHz (swept test) 1800MHz, 2600MHz, 3500MHz, 5000MHz (spot test)		
Modulation	<input type="checkbox"/> None <input type="checkbox"/> Pulse <input checked="" type="checkbox"/> AM 1KHz 80%		
Steps	1%		

	Horizontal	Vertical
Front	PASS	PASS
Right	PASS	PASS
Rear	PASS	PASS
Left	PASS	PASS

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



B.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

Electrical Fast Transient/Burst Test Results

Standard	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
Applicant	Bravour Deutschland GmbH		
EUT	Multi-ports USB Charging HUB	Temperature	23.7°C
M/N	B-20	Humidity	52.8%
Test Mode	Mode 1	Criterion	B
Test Engineer	Hy Luo		

Line	Test Voltage	Result (+)	Result (-)
L	1KV	PASS	PASS
N	1KV	PASS	PASS
PE			
L-N	1KV	PASS	PASS
L-PE			
N-PE			
L-N-PE			
Signal Line			
I/O Cable			

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**B.8 SURGE IMMUNITY TEST****Surge Immunity Test Result**

Standard	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
Applicant	Bravour Deutschland GmbH		
EUT	Multi-ports USB Charging HUB	Temperature	22.6°C
M/N	B-20	Humidity	53.6%
Test Mode	Mode 1	Criterion	B
Test Engineer	Hy Luo		

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result
L-N	+	90°	5	1.0	PASS
	-	270°	5	1.0	PASS
L-PE					
N-PE					
Signal Line					
Note					



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**B.9 INJECTED CURRENTS SUSCEPTIBILITY TEST**

Injected Currents Susceptibility Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
Applicant	Bravour Deutschland GmbH		
EUT	Multi-ports USB Charging HUB	Temperature	24.5°C
M/N	B-20	Humidity	54.8%
Test Mode	Mode 1	Criterion	A
Test Engineer	Hy Luo		

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 10	AC Mains	3V	A	PASS
10 ~ 30		3V ~ 1V		
30 ~ 80		1V		

Note:





B.10 MAGNETIC FIELD SUSCEPTIBILITY TEST

Magnetic Field Immunity Test Result			
Standard	<input type="checkbox"/> IEC 61000-4-8 <input checked="" type="checkbox"/> EN 61000-4-8		
Applicant	Bravour Deutschland GmbH		
EUT	Multi-ports USB Charging HUB	Temperature	23.9°C
M/N	B-20	Humidity	54.6%
Test Mode	Mode 1	Criterion	A
Test Engineer	Hy Luo		

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
1	5 mins	X	A	PASS
1	5 mins	Y	A	PASS
1	5 mins	Z	A	PASS

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





B.11 VOLTAGE DIPS AND INTERRUPTIONS TEST

Voltage Dips And Interruptions Test Results

Standard	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
Applicant	Bravour Deutschland GmbH		
EUT	Multi-ports USB Charging HUB	Temperature	23.8°C
M/N	B-20	Humidity	52.3%
Test Mode	Mode 1	Criterion	B&C
Test Engineer	Hy Luo		

Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion	Result
0	100	0.5P	B	PASS
70	30	25P	C	PASS
0	100	250P	C	PASS

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



ANNEX C

(External and internal photos of the EUT)



Fig. 1

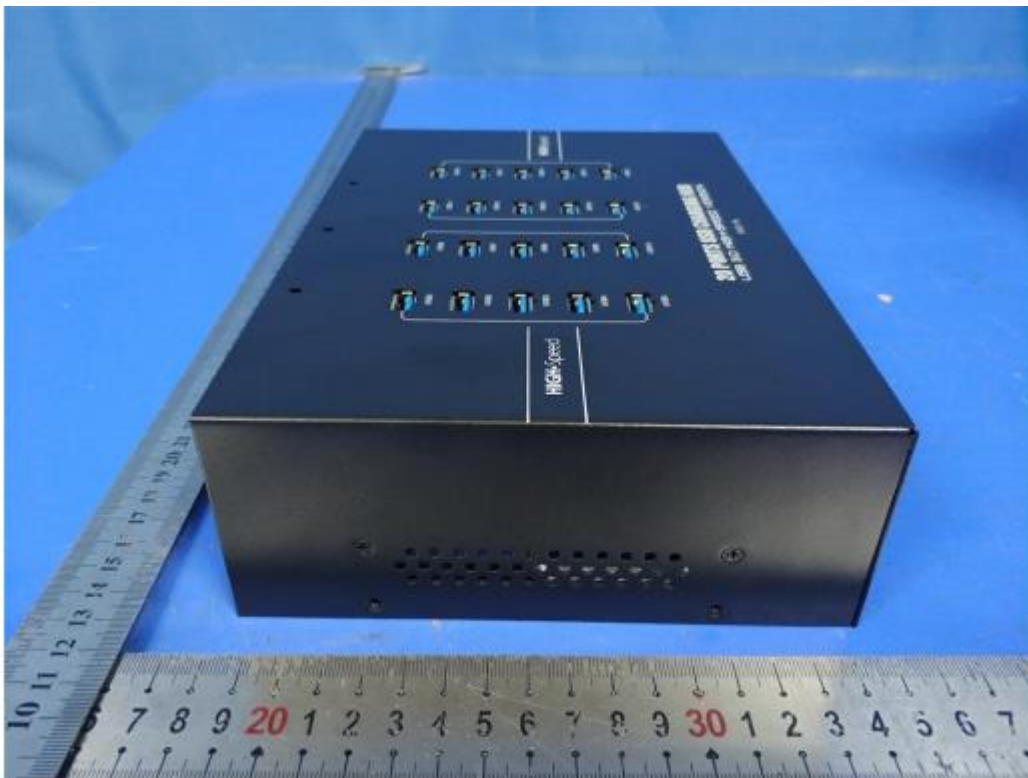


Fig. 2





Fig. 3



Fig. 4





Fig. 5

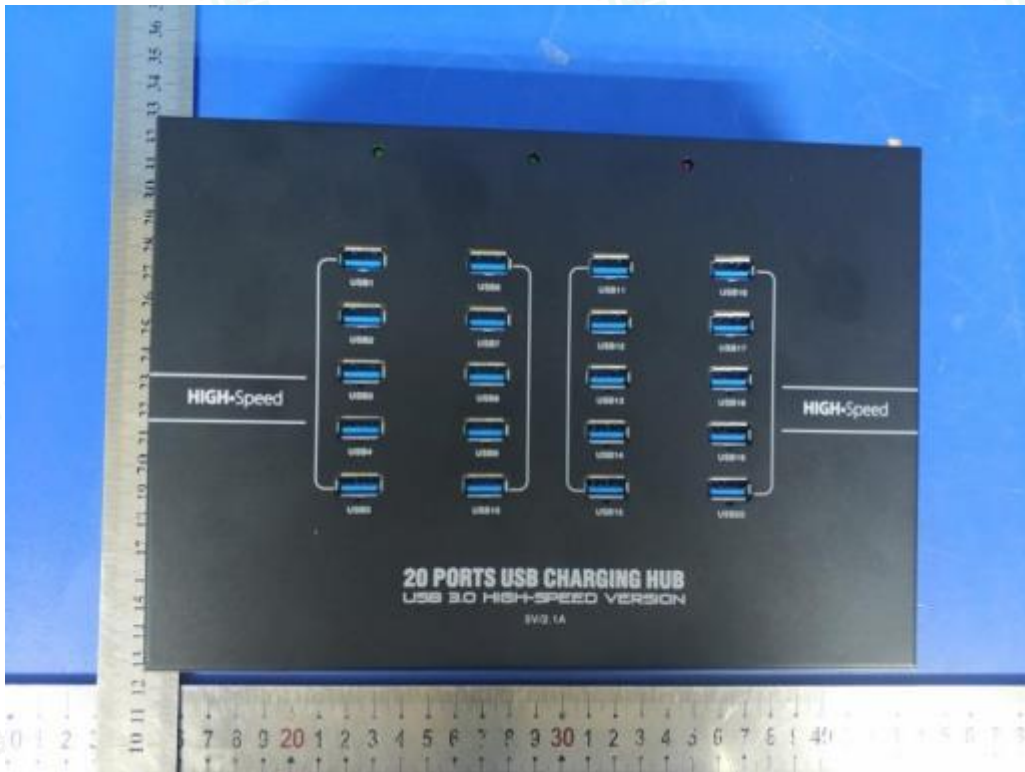


Fig. 6



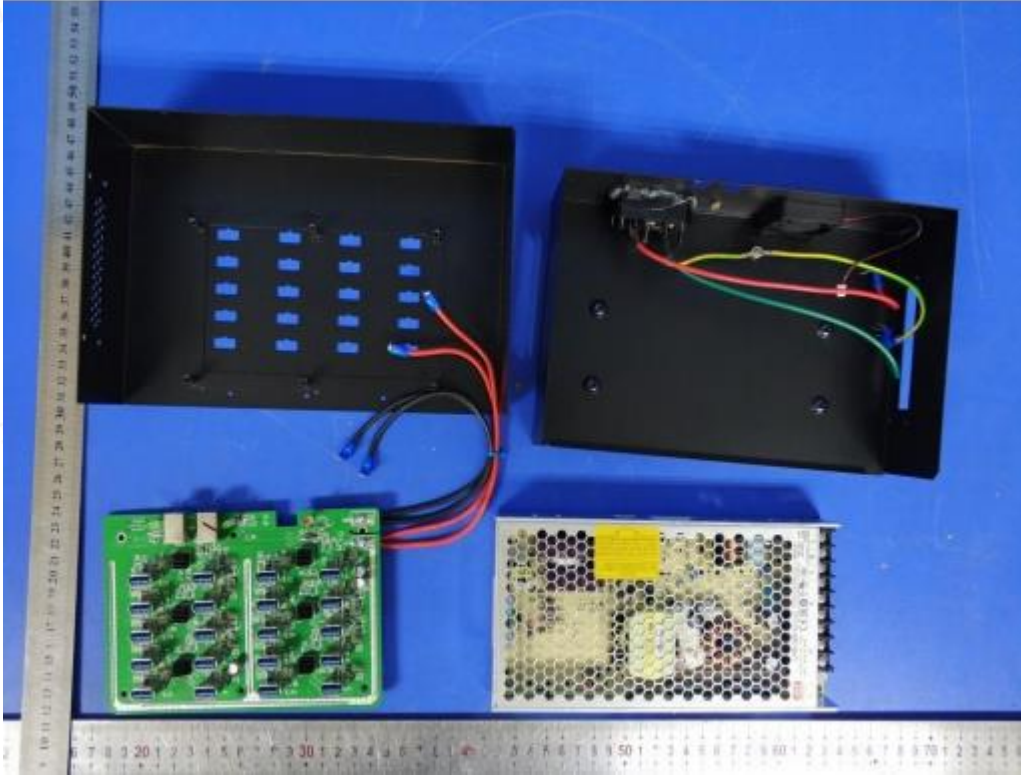


Fig. 7

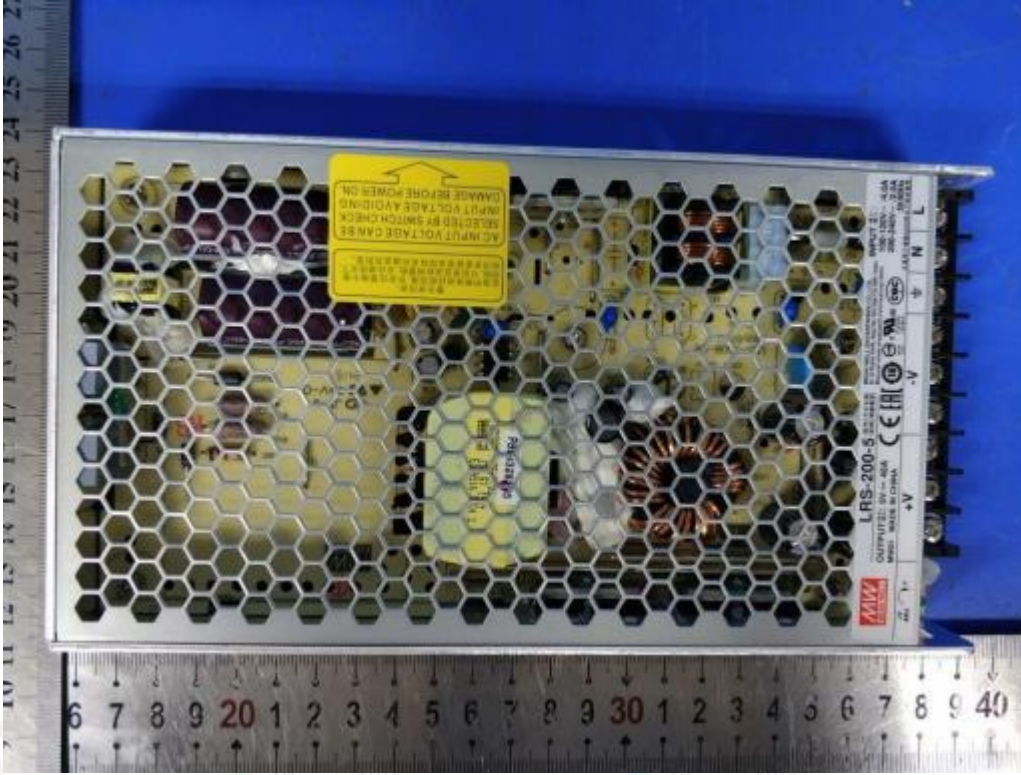


Fig. 8



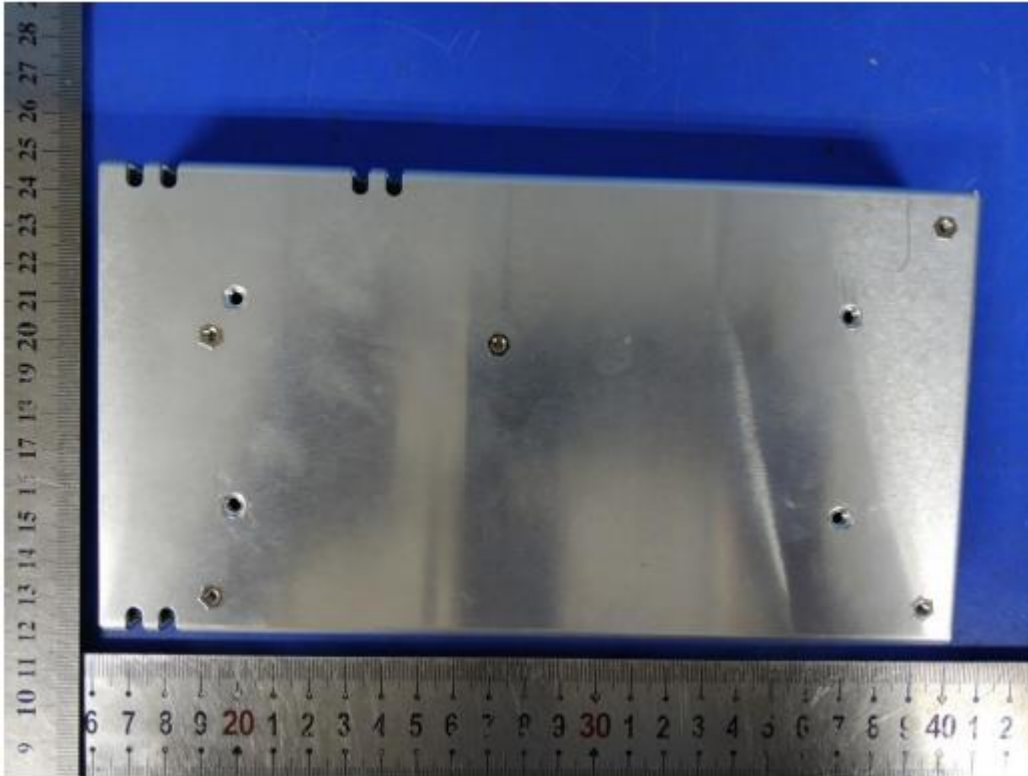


Fig. 9

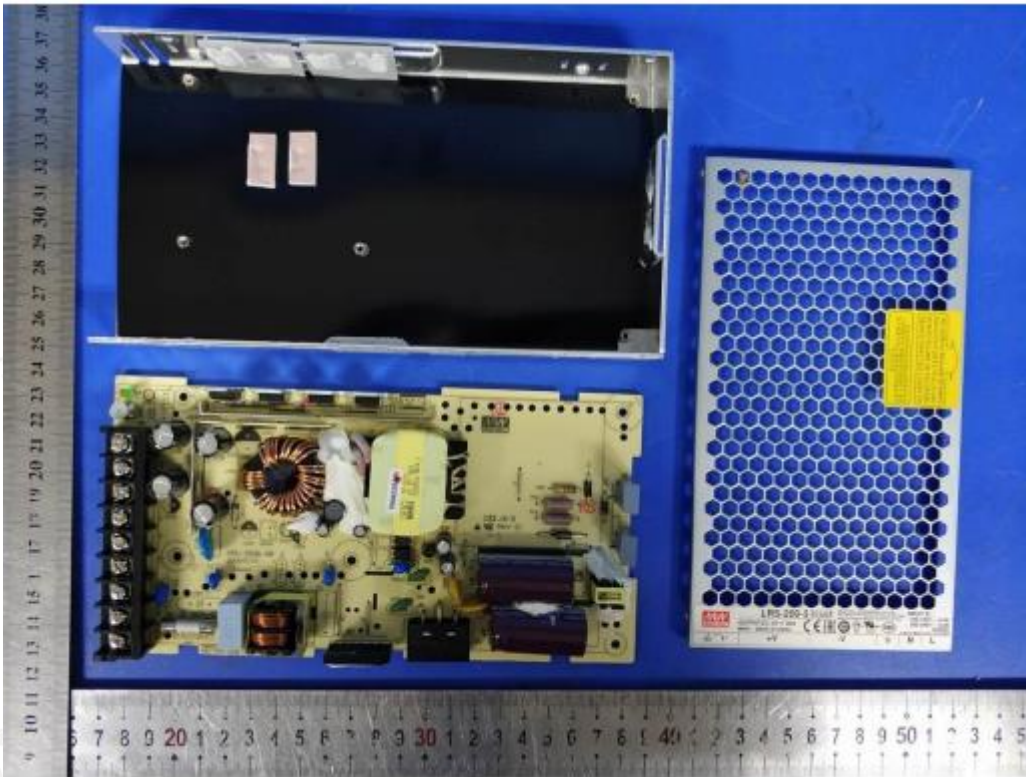


Fig. 10



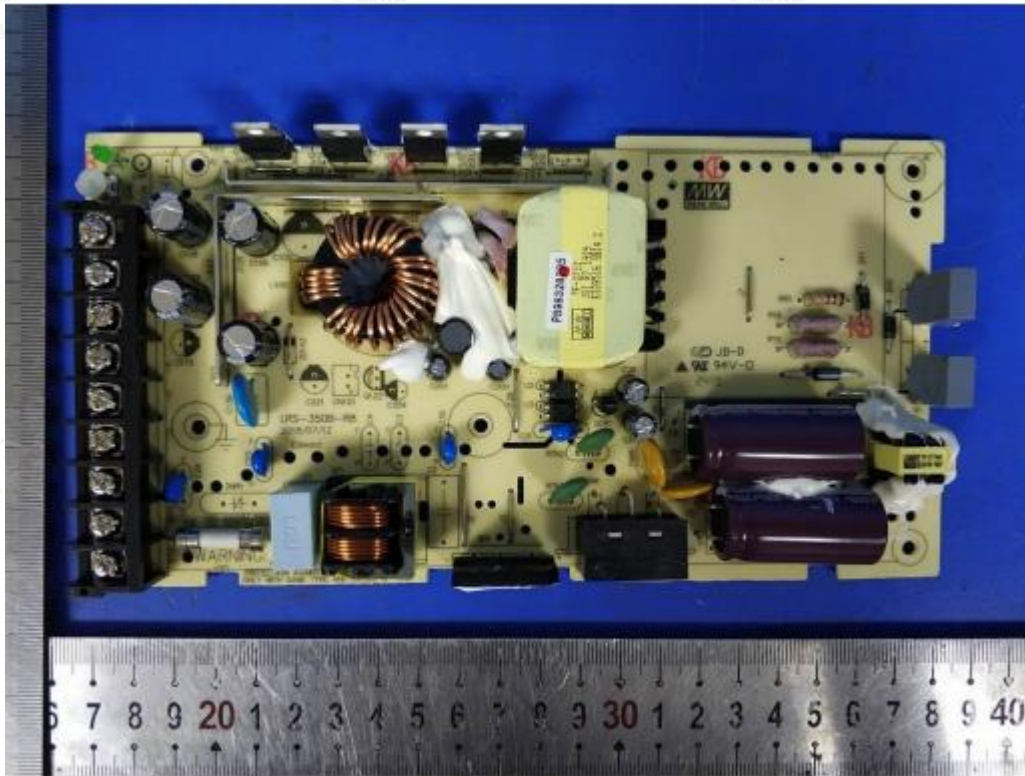


Fig. 11

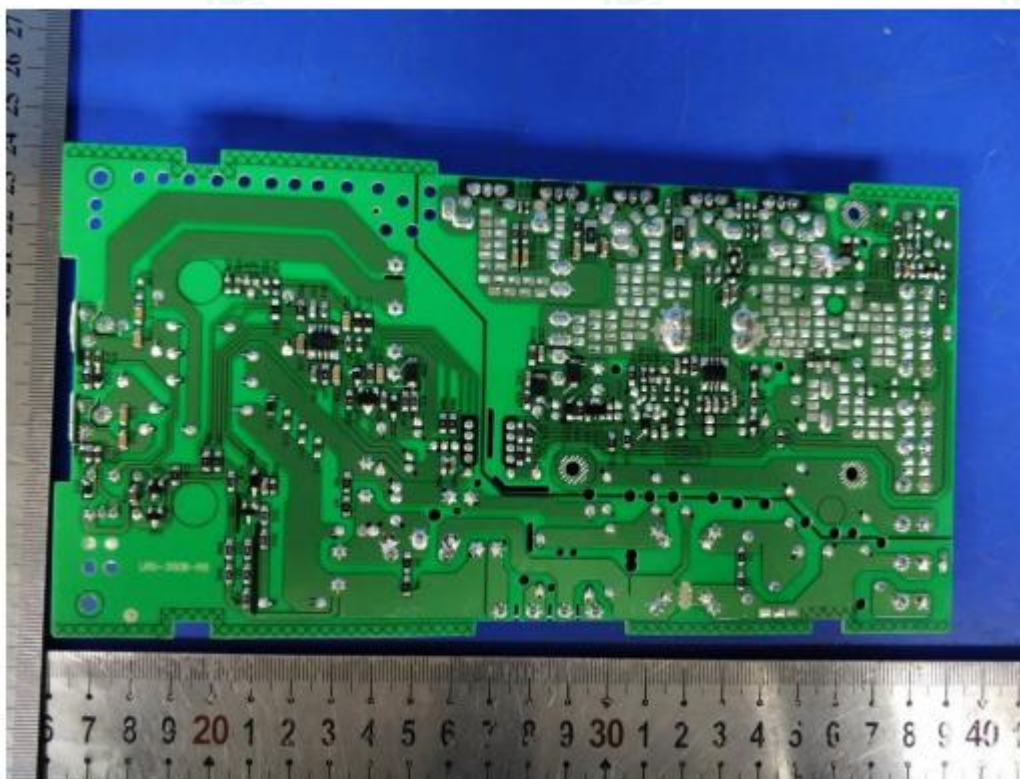


Fig. 12



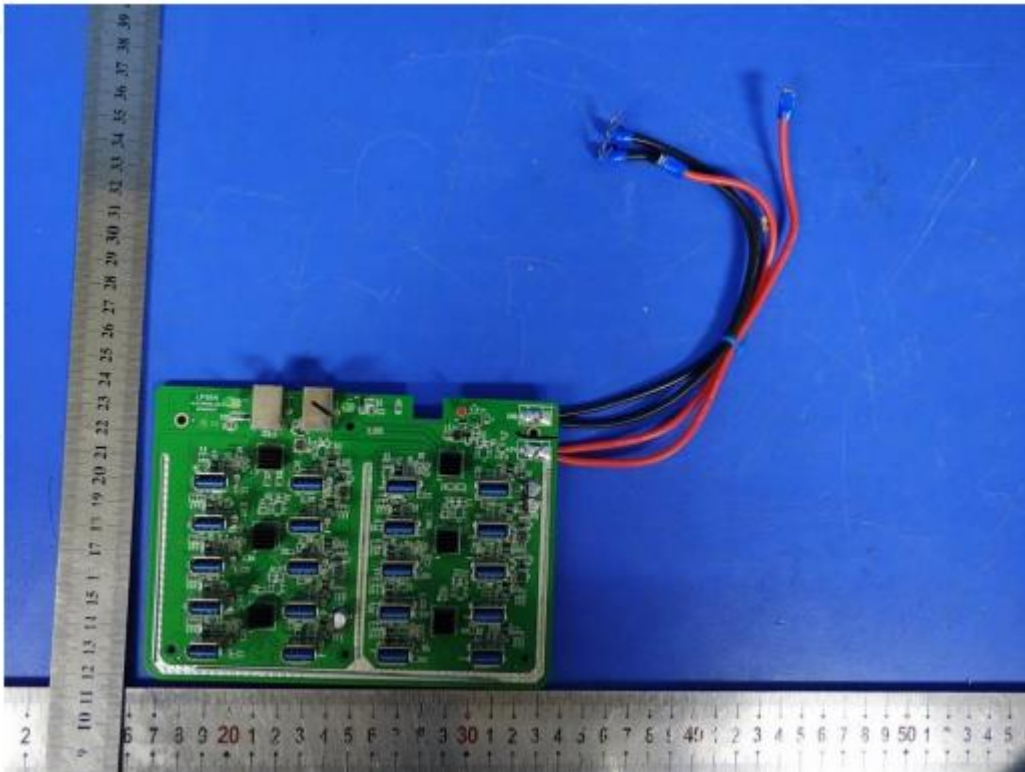


Fig. 13

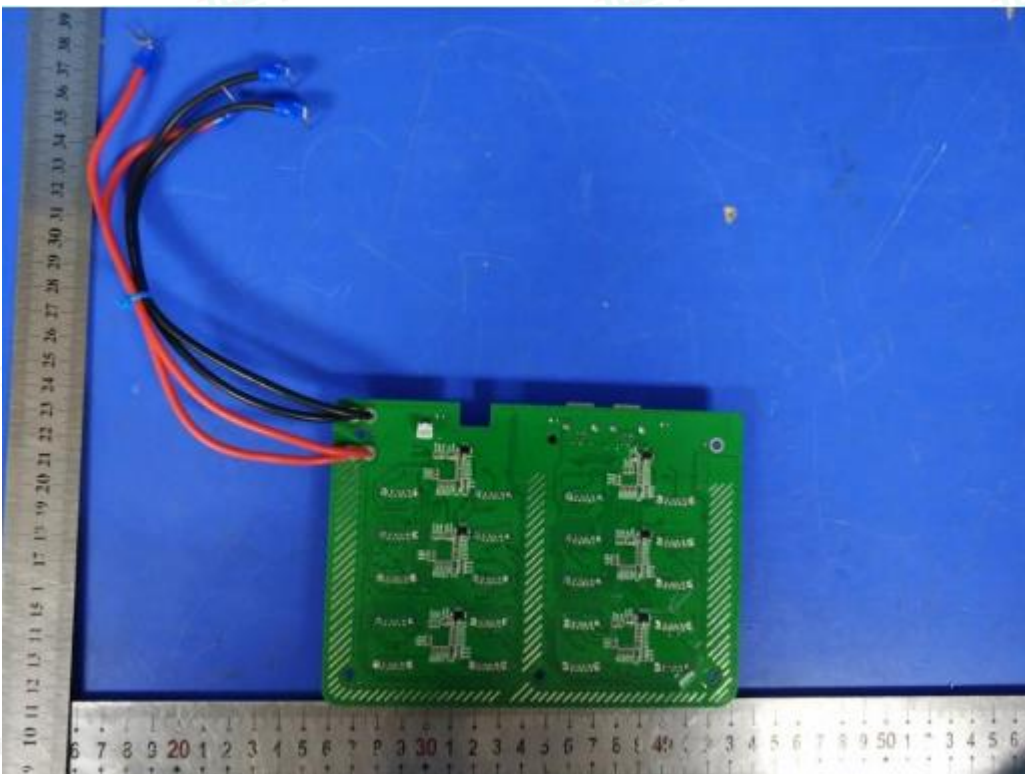


Fig. 14

----- THE END OF TEST REPORT -----

