

VERTEX

Seasonic PX-1200

Seasonic Vertex PX-1200, PCIe 5.0, ATX 3.0
238871 Lok. **DG** 41
 Serie # R2308AA170730091 DKO

 IQ10174372

Model

Safety M

Intel Spe

Dimensions

Efficiency

Protection Features

Hazardous Materials

AC Input Range

DC Output Voltage

Maximum Load

Combined Load

Total Output

Cable Type

Motherboard

CPU (ATX 12 V / EPS 12 V)

PCIe

12VHPWR

SATA

SATA 3.3V

Molex

160 mm (L) x 150 mm (W) x 86 mm (H)

80 PLUS® Platinum / ENERGY STAR® / ErP Lot 6 2013 compliant

OPP / OVP / UVP / SCP / OCP / OTP

RoHS-5

100-240 Vac 15-7.5 A 50-60 Hz
200-240V ~ 7.5 A 50-60Hz, 适用于中国地区使用

+3.3 V +5 V

25 A 25 A

125 W




+12 V -12 V +5 V_{SB}

100 A 0.3 A 3 A

1200 W 3.6 W 15 W

1200 W

Connector(s) per Cable	Total Length
1 (20 + 4 Pins)	610 mm
1 (4 + 4 Pins)	700 mm
1 (6 + 2 Pins)	750 mm
1 (16 Pins to 16 Pins)	750 mm
4	950 mm
2	550 mm
3	690 mm

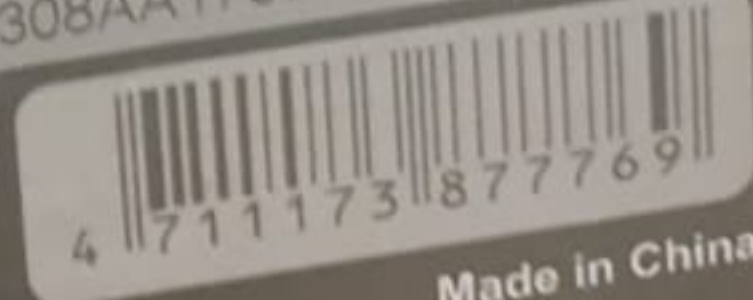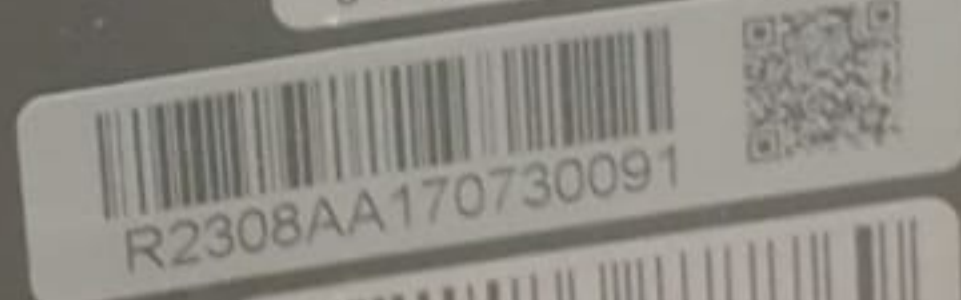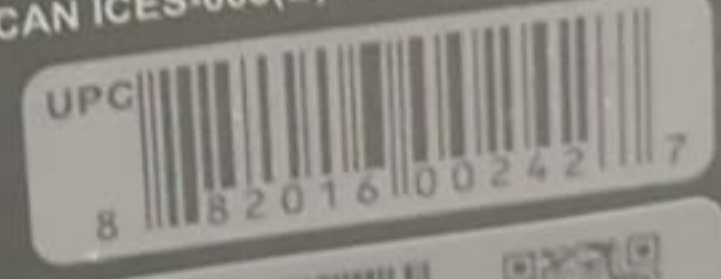

WARNING
 California Proposition 65
 Cancer and Reproductive Harm
www.P65Warnings.ca.gov

WARNING
 This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Made in China