



**INTELLIGENT LOCK
USER MANUAL**



ONE

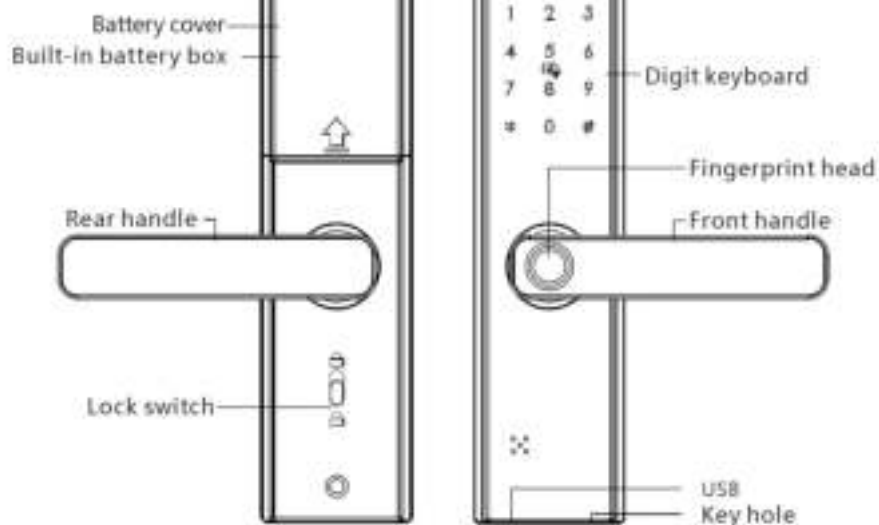

TWO

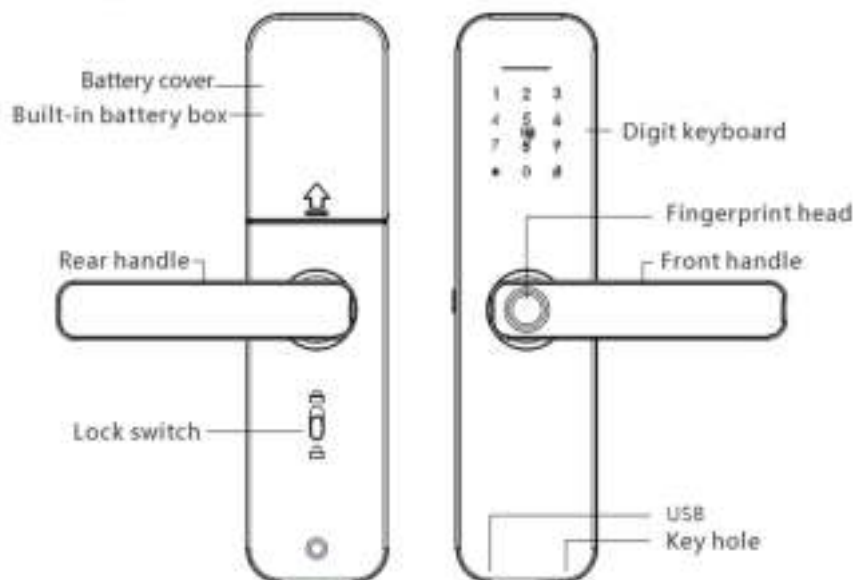

THREE

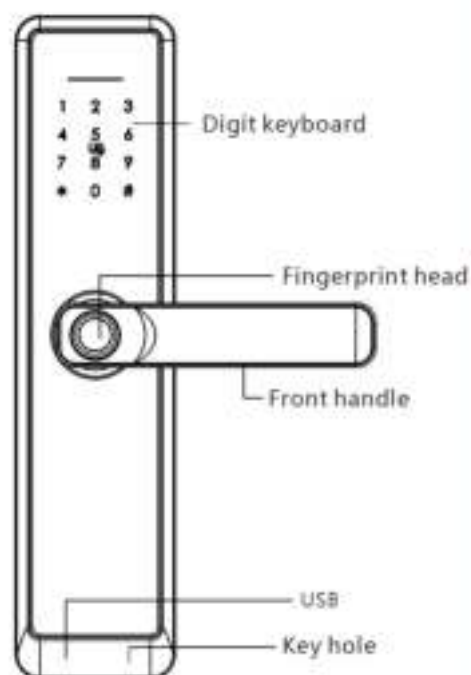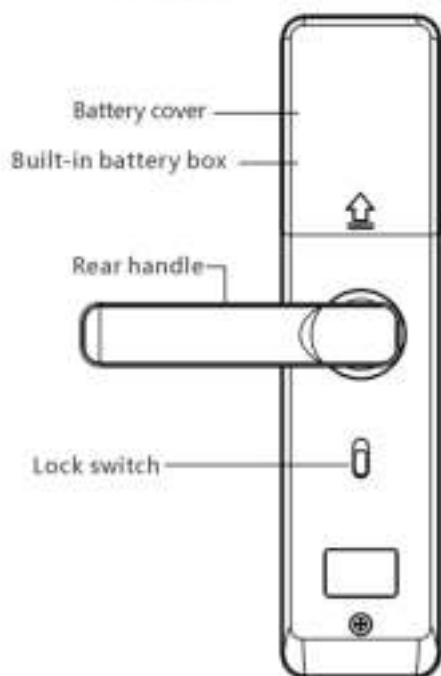

一、 Overview

1. Introduction

To meet the needs of security prevention and modern management in home, office and intelligent community, we have launched fingerprint + card + password lock module. With the advanced fingerprint identification, contactless card and password as the door key, and a variety of modes to choose from, it is more flexible, more convenient, and more secure!

2. Product advantages and features

- The door can be opened by fingerprint, card, password and remote control
- A variety of door opening modes are optional, strengthening the security level of the lock
- The adding and deleting of accounts is managed by numbers, easy to operate
- Have the function of preventing others from peeping password
- Startup self-test, intelligent identification function module, quick optional function, such as fingerprint + password or card + password, etc.
- All components are international famous brand products with stable performance and reliable quality.
- The door lock modules are waterproof, moisture-proof and mildew-proof
- High and low temperature, vibration and aging tests are conducted on the door lock module adapt to harsh environment.

3. Technical parameters

Power supply	4.5V-6.5V (4 dry batteries)
Typical static current	< 50 ua (battery life is over a year)
Working current	< 250 ma (strong driving ability)
Number of fingerprints	Totally 251 users (100 for fingerprint users, no limit for other users)
Number of cards	
Number of passwords	
Number of remote controls	20
Resolution ratio:	500DPI
FRR	≤ 0.15%
FAR	≤ 0.00004%
Working temperature:	-10℃ ~ 60℃
Relative humidity:	20% ~ 93%

二、 Function and operation

1. Initialization

Press and hold the setting button (the button on the rear panel)

for 5S, then you will hear: "**Initialization successful**"


Note: the password for initialization is: 123456, you can also open the door with any fingerprint.

2. Add administrator (you can add up to 3 administrators)



3. Add lock opening information

Method 1:

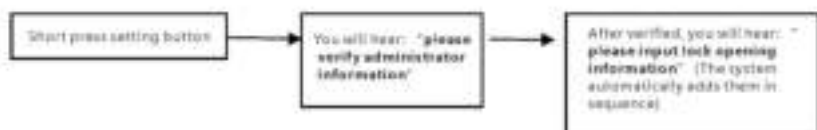

Method 2:



Note: the first 3 lock opening information will be regarded as the administrator, you can

4. Delete door opening information



5. Normally on mode

Method 1:



Method 2:

After opening the door, please press ***


Note: after the normally on open mode is enabled, the lock will be normally open and will not be automatically closed. To disable normally on mode, please open the lock by fingerprint or password.

6. Mute mode




Note: after the mute mode is turned on, it's mute when unlocking.


7. Time setting

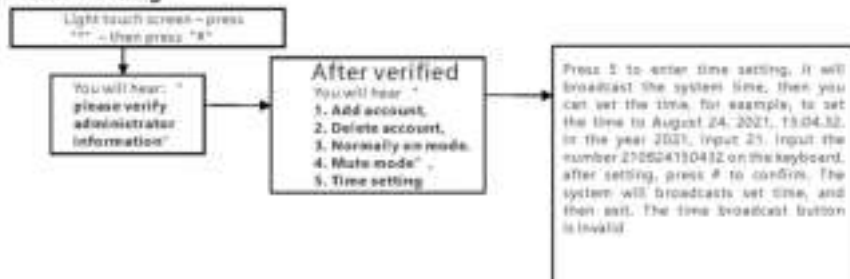


8. Add remote control

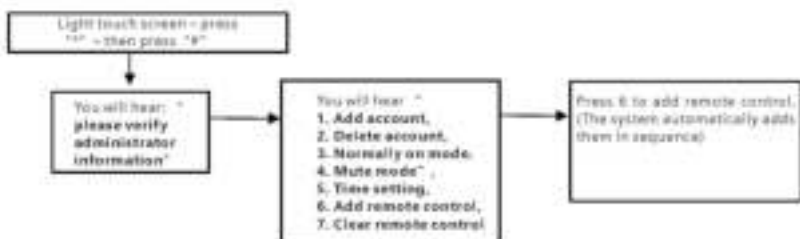

9. Clear remote controls

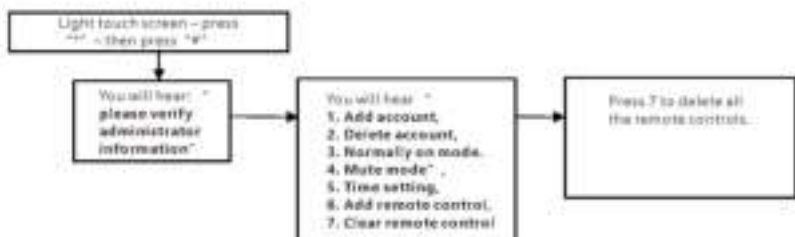

10. Temporary password Mini program

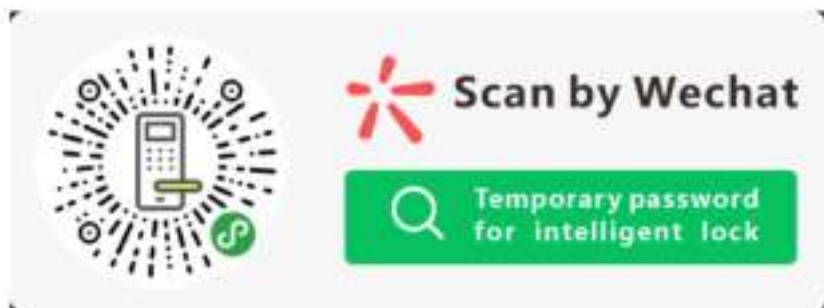

11. Other instructions

- If the password is wrong for more than 6 times, the keyboard will be locked for 1 minute and the system does not respond to any operation within 1 minute.
- Password anti-snooping function: when opening the door, enter the password as follows: XXX Password XXX; you can add some irrelevant code before and after the password, and then press # to confirm. The password must be included in the entered content.
- If no operation for more than 12 seconds, the system will exit automatically.
- When the voltage is lower than 4.5V, the lock will automatically alarm every time. After the alarm, the lock can be unlocked for 200 times. After exceeding the number, it will be delayed when you open the lock, please replace the battery before exceeding the number.
- Under the initialization state, enter "55666888#" to switch languages. Both Chinese and English are supported.

