




HOFTRONIC™ LUXOR LED FLOODLIGHT


HOFTRONIC™ LUXOR LED FLOODLIGHT

- INPUT POWER**
220-240V ~ 50/60Hz
- DISPLACEMENT FACTOR (DPF)**
>0.9
- WATTS**
30 Watt
- OPERATING TEMP.**
-10°C ~ 40°C
- LUMEN**
4100 lumen (wide cone)*
- MATERIAL**
Aluminum
- BEAM ANGLE**
120°
- ON/OFF**
50.000
- CRI**
>70Ra
- LIFESPAN**
50.000 hours
- POWER FACTOR (PF)**
>0.9

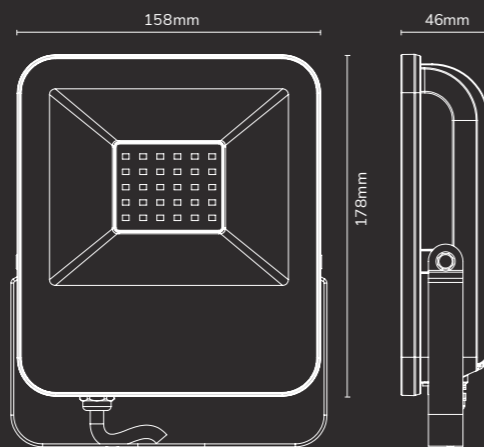

- EN** Luxor LED floodlight
- NL** Luxor LED breedstraler
- DE** Luxor LED-Fluter
- FR** Projecteur à LED Luxor
- ES** Projector Luxor LED
- PT** Projector LED Luxor
- IT** Proiettore Luxor LED
- PL** Naświetlacz LED Luxor
- SV** Luxor LED-strålkastare
- DA** Luxor LED-strømslys
- NN** Luxor LED flomlys
- FI** Luxor LED-valonheitin

*Measured in a wide cone (120°)

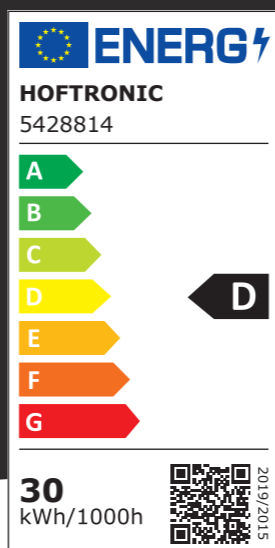

HOF Trading B.V.
Fahrenheitstraat 11
6003 DC Weert
The Netherlands
Made in China

WWW.HOFTRONIC.COM



SKU 5428814



Pressure & water membrane



5 Year Warranty



IP65 Rating

HOFTRONIC™



IP65 Rating



5 Year Warranty



Pressure & water membrane



LUXOR LED FLOODLIGHT

Luxor LED-Fluter
Projecteur à LED Luxor

4100 Lumen (Wide Cone) - 30W - LED - Δ 120°
6400K Daylight White - 220-240V ~ 50/60Hz



HOFTRONIC™ LUXOR LED FLOODLIGHT



IP65 Rating



5 Year Warranty



Pressure & water membrane

Batchnumber

