



VR EVO 10 and 10-S

10,000 lb. Capacity—The Perfect Blend of Speed and Power

Ideal weight capacity and line speed for 1/2-ton pickups, Jeeps, and larger SUVs. The VR EVO 10 and 10-S feature IP68-rated waterproof construction, an ultra-reliable Albright® contactor inside a relocatable control pack, and a state-of-the-art, two-in-one remote for added ease of use and versatility. With its fast line-speed and lower amp draw, the VR EVO series of winches are the hardest-working standard-duty winches we've ever made, with tactical styling that looks great up front and at a price that won't pull you out of your budget.

- A powerful series-wound motor and planetary gear train deliver faster line speed under load, with lower amp draw
- IP68-rated waterproof winch construction keeps the elements out
- High-performance Albright contactor delivers maximum reliability
- Control packs can be relocated for low-profile installations
- Durable, one-piece cast-aluminum tie-plate for added strength and durability
- Two-in-one remote with wired AND wireless options for ease of use and versatility
- Available with wire or synthetic rope
- Limited lifetime warranty for mechanical parts and 7 years on the electrical
- Designed, engineered, and tested by WARN engineers in the U.S.A.



PN 103252 VR EVO 10 (.354" x 90' steel rope)

PN 103253 VR EVO 10-S (3/8" x 90' synthetic rope)



SPECIFICATIONS

Winch Model: VR EVO 10, VR EVO 10-S

Parts Numbers: 103252 (VR EVO 10), 103253 (VR EVO 10-S)

Rated Line Pull: 10000 lbs. (4536 kg)

Motor: 12V DC, series wound

Electrical Controls: Albright Contactor

Remote Control: 2-in-1 plug-in remote with wireless capability and 11.5' (3.5m) lead

Gear Train: 3-stage planetary

Gear Ratio: 218:1

Clutch (freespooling): Rotating ring gear clutch

Brake: Spring Brake

Drum Diameter/ Length:

Steel and Synthetic: 2.5"/9.0" (6.73cm/23cm)

Weight:

Shipping Steel: 91.93 lbs. (41.7 kg)

Shipping Synthetic: 72.40 lbs. (32.84 kg)

Net Product Steel: 74.74 lbs. (33.9 kg)

Net Product Synthetic: 55.20 lbs. (25.04 kg)

Rope:

Steel: .354" x 90' (9mm x 27.4m)

Synthetic: 3/8" x 90' (9.5mm x 27.4m)

Fairlead: Steel: Roller, Synthetic: Die Cast Hawse

Recommended Battery: 650 CCA min. for winching


Battery Leads: 0.98" x 6.5' (25mm x 2m)

Finish: Powder coating over primer undercoating

Warranty: Limited lifetime

12V DC performance specs (first layer of drum)

Line Pull Lbs. (Kg)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (Kg)
0	27.1 (8.3)	58 amps	1/10000 (4536)
2000 (910)	13.9 (4.2)	125 amps	2/7996 (3627)
4000 (1810)	9.9 (3.0)	185 amps	3/6661 (3021)
6000 (2720)	8.2 (2.5)	244 amps	4/5708 (2589)
8000 (3630)	6.5 (2.0)	303 amps	5/4993 (2265)
10000 (4536)	5.2 (1.6)	358 amps	

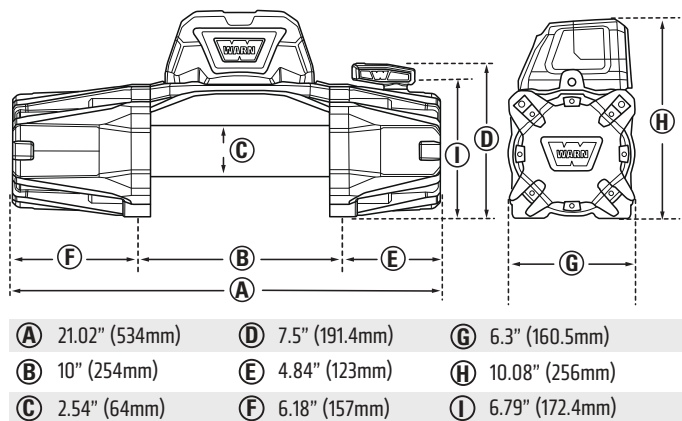

Winch Dimensions: 21" L x 6.3" D x 10.1" H
(534mm L x 160.5mm D x 256mm H)

Mounting Bolt Pattern: 10.0" x 4.5" (254mm x 114.3mm)

Warn Industries, Inc.
12900 S.E. Capps Road,
Clackamas, OR USA 97015-8903



Customer Service (North America):

1-800-543-9276

International Sales Support:

+1 503 722 1200

warn.com