

要求：

1.尺寸：80*90mm

2.材质：80G书写纸 成本印刷

图纸编号：YGH-QM-03-1509

版本号：A-1

无线充电钟
wireless charging clock

前言

感谢您使用本公司产品，这是一款无线充电钟，LED数码显示，该时钟电源采用电能传输电磁感应技术，是本产品最大特点，您只要有一个Qi标准的产品，都可以用本产品进行充电，如有Qi标准的手机、相机等。数码时钟采用3V内置电池，在断电的情况下，可供时间记忆，铝制外壳，质感轻、强度高，外形优雅美观。简洁的操作，舒适的唤醒，给您带来一个全新的生活体验。


开机提示：

插好适配器和电源线，将产品TYPE-C头接通5V直流电，即可开机进入工作画面。

主功能介绍：


1. 无线充电功能
2. 时钟设置；
3. 闹铃设置（1组、铃声B-B-B，渐变）
4. 贪睡设置
5. 亮度4档可调节（含关闭档）
6. 12/24时制式转换
7. 复位功能
8. 时间记忆功能
9. 出厂模式设置

结构示意图：

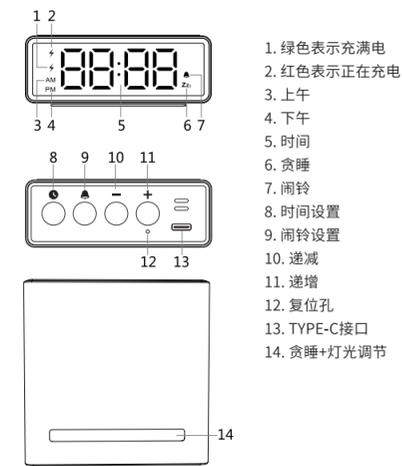

时间设置

1 长按[●]键，进入时间设置模式，小时数字开始闪烁，短按[+]/[-]设置小时；再短按[●]键，分钟数字开始闪烁，短按[+]/[-]设置分钟；长按[+]/[-]可快速设置时间。



12/24小时制切换

1 时钟模式下：短按[●]键，进行12H/24H时制切换，2秒后自动显示相应时间。



闹铃设置

1 长按[▲]键2秒，进入闹铃设置模式，闹铃图标“▲”长亮，小时数字开始闪烁，短按[+]/[-]设置小时；再短按[▲]键，分钟数字开始闪烁，短按[+]/[-]设置分钟；长按[+]/[-]可快速设置时间。




开启/关闭闹钟

1 短按[▲]键，可开启/关闭闹钟，图标“▲”亮为闹钟开启，可查看闹钟设置时间，5秒后自动返回时间模式。



贪睡设置

1 在闹铃响时，闹铃符号闪烁，响闹时长5分钟，短按底部[贪睡+灯光调节]键，响闹停止并开启贪睡，贪睡符号“Zz.”亮，9分钟后再次响闹。

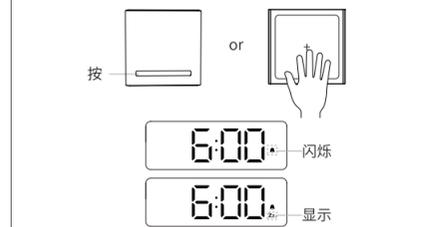

关闭贪睡


1 贪睡指示灯长亮为开启状态，长按底部[贪睡+灯光调节]或短按除底部[贪睡+灯光调节]键以外的[任意键]可关闭贪睡。

亮度调节

1 在时钟显示状态下：按[贪睡+灯光调节]键，可以调节4档亮度。（亮度变化：0%、10%、50%、100%）默认亮度：50%中亮。

无线充电功能

1 产品插上电源，指示红、绿灯互闪一次后熄灭，进入待充状态。将手机线圈位置对准充电板中心位置，当检测到充电时，充电符号“⚡”红灯长亮。

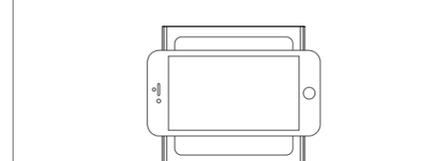

红/绿灯显示提醒

上电：红/绿灯交替闪烁1次
 待机：LED熄灭
 充电：红色LED常亮
 充满：安卓手机：充满红灯灭转绿灯长亮；Iphone手机：充满红灯长亮
 报警：红/绿灯交替闪烁
 FOD异物检测：红/绿灯交替闪烁

复位操作

用牙签等尖锐物按进[复位]孔，此时全屏显示2秒后进入默认状态。

温馨提示

本设备支持符合Qi标准的手机
 1. 请选用符合快速充电适配器进行无线充电(QC2.0或QC3.0)；
 2. 当红/绿灯交替闪烁时，表示检测到异物或有短路；
 3. 请将设备远离水和其他易燃液体；
 4. 不建议边充电边使用；
 5. 兼容的手机设备，如小米/三星S8、S8+/三星S6 edge/Iphone8等手机，需购买安卓或Iphone版“无线充电接收器”方可使用，如不确定手机是否支持Qi无线充电，可百度进行查询。


OVERVIEW

Congratulations on your purchase of YGH5244 wireless charger alarm clock, it is not only a wireless charger cover 5/7.5/10W, but also a bedside alarm clock with 4 level brightness control, 12/24 hours format selection and snooze function. Please take time to read and understand this manual, so you can begin to enjoy the convenience and features from this product.

POWER ON

Plug one end of the cable into the type-c port of the clock, and connect the other end to the adapter(not included). Then plug the adapter into the power, the clock start to serve.

DIAGRAM

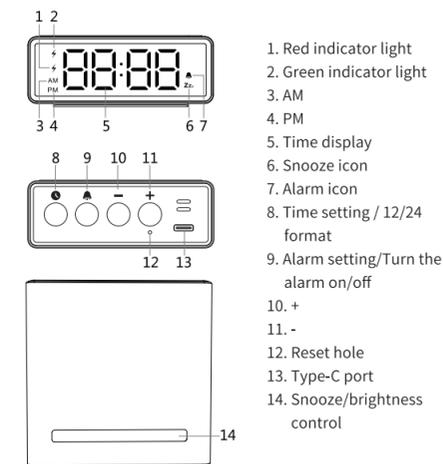

TIME SETTING

1 Time Setting

In time mode, press and hold [●] button until the “Hour” blink, press [+] or [-] button to adjust the hour, then press [●] to save; and the “Minute” will blink, press [+] or [-] button to adjust the minute, then press [●] to save, the time is set.



Note:
 1. Press and hold [+] or [-] button to quickly adjust.
 2. 10 seconds without any operation will automatically confirm and return to the time display mode.

2 12/24 Switching

In time mode, press [●] button to switch between 12/24 hours. If 12H mode selected “AM/PM” will display on the screen.

ALARM SETTING(Alarm Sound Duration : 2 Minutes)

1 In time mode, press and hold [▲] button until “Hour” blink, then press [+] or [-] button to adjust the hour, press [▲] to save and “Minute” will blink, press [+] or [-] button to adjust the minute, press [▲] to save, the alarm is set, “▲” icon will display on the screen. It indicates alarm turn on.



TURN ON/OFF THE ALARM

1 In time mode, Press [▲] button to turn on or off the alarm clock
 ON: [▲] icon will display on the screen.
 OFF: [▲] icon will disappear on the screen.

SNOOZE FUNCTION(Snooze Time:9 Minutes)

1 Snooze Function

When alarm is sounding, the whole screen blinks, press the [Snooze/Light] button to enter snooze function and temporarily stop the alarm, the “Zz.” icon will display on the screen, the alarm will sound again 9 minutes later.



2 Stop Alarm

When alarm is sounding, press any button except [Snooze/Light] button to stop the alarm. And it will sound on next day.

3 Turn Off The Snooze Function


When the snooze function is activated, press and hold [Snooze/Light] button to turn off the snooze function, “Zz.” icon will disappear on the screen.

BRIGHTNESS ADJUSTMENT

1 In time mode, press the top the alarm to trigger [Snooze/Light] button to adjust the brightness of the led display, 4 level brightness control. You can also press the [Snooze/Light] button at the bottom of the alarm to adjust the brightness of the led display.

FAST WIRELESS CHARGING FUNCTION

1 Compatible with Qi-enabled devices and any phones with wireless charging back clip, such as iPhone X, iPhone 8, Samsung Galaxy and more. After connecting the QC2.0 or QC3.0 adapter, you just need put your smart phones on the center of wireless charger and it will work smoothly, When the phone is charging, red indicator light “⚡” stayed on.

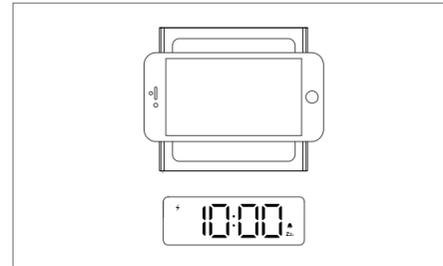

FACTORY SETTING

Time:12:00,12H time format
 Time of alarm clock:6:00
 Alarm clock :Off
 Ringtone: B-B-B tone

SPECIFICATIONS

Time erros: ±30 seconds/month
 Alarm: 1 group

PACKAGE CONTENT

- 1* YGH5244 Alarm Clock
- 1* Type-c cable
- 1* User Manual

SAFETY INSTRUCTIONS

When using the product, please pay attention to the following safety instructions.
 1. The manufacturer will not be responsible for the product damage caused by improper use or handling of the product.
 2. Please use the factory standard type-c cable that come with the product.
 3. Place your phone on the center of the clock to ensure stable charging.
 4. Cases made of metal and attachments such as magnets, cards, and grips will interfere with charging.
 5. Quick charge 2.0/3.0 adapter required for fast charge mode.
 6. Do not use your phone while the product is charging.