

SM70PTZ



Specifications

Frequency	2.4Ghz FHSS
Type of Modulation	GFSK
Transmission Range	Up to 960 feet/300 meters (Open space-No obstructions)
Input Voltage	5V
Power Adapter	Input:100-240VAC 50/60Hz
LCD Screen	7"HD TFT LCD
Rechargeable Battery	Model:YB905560 3.7V, 4000mAh
Image Sensor Type	1/4" Color CMOS
IR LED Type	940nm
Operating Environment	Indoor use only:Temperature:32-104°F/0-40°C Humidity:5%-90% rh(Relative Humidity)

! WARNING:


Stragulation Hazard-Children have STRANGLED in cords.Keep adapter cords out of the reach of children(more than 3 feet[1 m]away).




Quick start Guide

1. Connect the small plug of the power adapter to the baby unit and the other end to the electrical outlet.
2. Connect the small plug of the power adapter to the parent unit and the other end to the electrical outlet.

Package Contents

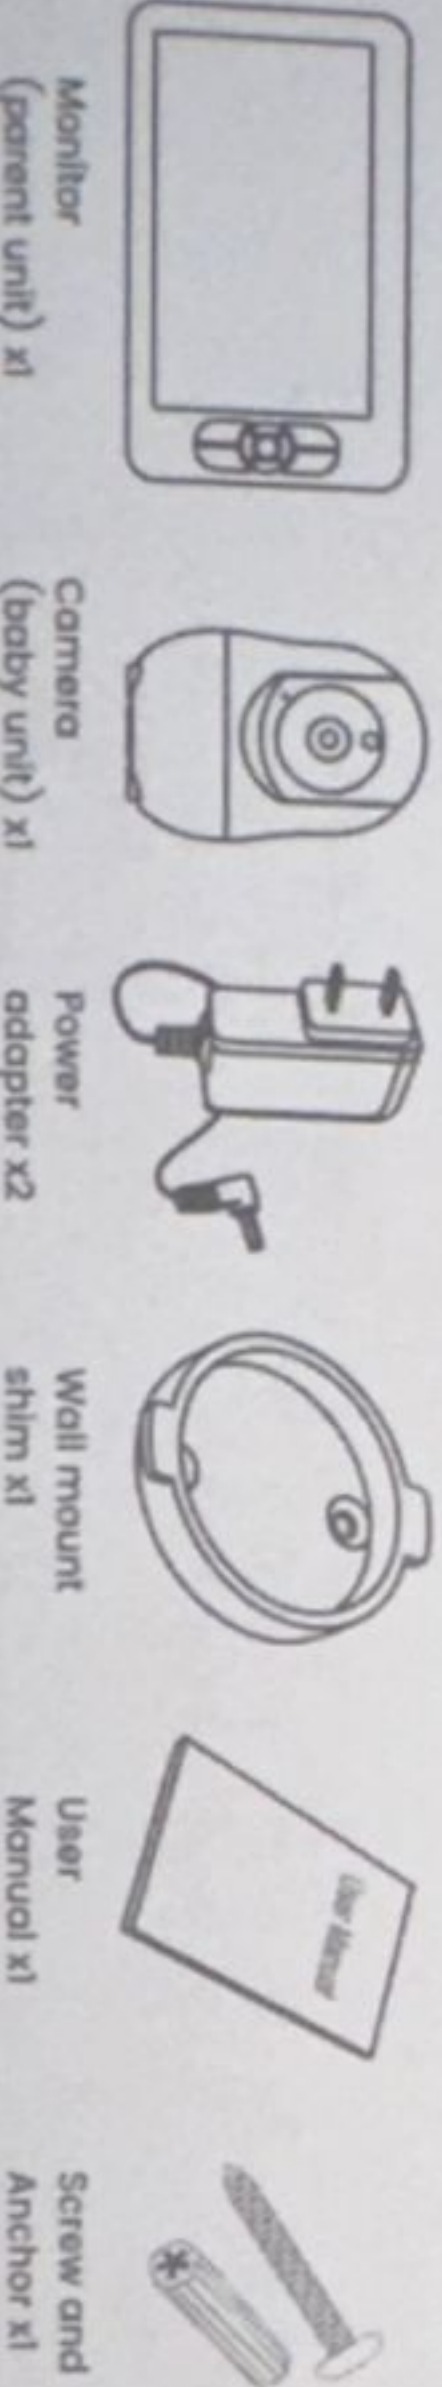

Monitor (parent unit) x1
Camera (baby unit) x1
Power adapter x2
Wall mount shim x1
User Manual x1
Screw and Anchor x1

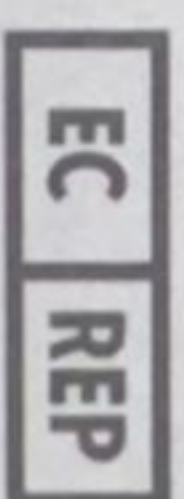

MADE IN CHINA

