BUILT-IN REFRIGERATOR COLUMNS
BUILT-IN FREEZER COLUMNS
BUILT-IN WINE COLUMNS
BUILT-IN BOTTOM MOUNT

DESIGN GUIDE - EU

REFRIGERATORS

Refrigerators are a core building block of every kitchen. Bertazzoni offers a wide range of applications, sizes, and installation options, which are all harmonized by design to match the entire kitchen appliance suite.

Bertazzoni refrigerators are available in various styles, including Columns, Bottom Mount, and French Door models. With the Bertazzoni Design Guide, you can enjoy flawless installation of all the built-in 213 cm (84") models from the both the T and V tier lineup.

These built-in models are designed to accommodate custom kitchen panels or stainless-steel doors and handles that match the other appliances in your kitchen. They can be installed proud or flush with the cabinets, bringing your personal style to the kitchen.

We've taken care of every detail so that you can enjoy a seamless and elegant look in your kitchen.

INDEX

INTRODUCTION **2**

T TIER LINE UP **4**

BUILT-IN REFRIGERATOR COLUMNS **5**
90 cm (36”) Refrigerator Column Panel Installed 7
90 cm (36”) Refrigerator Column Panel Ready 10
75 cm (30”) Refrigerator Column Panel Installed 13
75 cm (30”) Refrigerator Column Panel Ready 16
60 cm (24”) Refrigerator Column Panel Installed 19
60 cm (24”) Refrigerator Column Panel Ready 22

BUILT-IN FREEZER COLUMNS **25**
75 cm (30”) Freezer Column Panel Installed 27
75 cm (30”) Freezer Column Panel Ready 30
60 cm (24”) Freezer Column Panel Installed 33
60 cm (24”) Freezer Column Panel Ready 36
45 cm (18”) Freezer Column Panel Installed 39
45 cm (18”) Freezer Column Panel Ready 42

BUILT-IN WINE COLUMNS **45**
60 cm (24”) Wine Column Panel Installed 47
60 cm (24”) Wine Column Panel Ready 50
45 cm (18”) Wine Column Panel Installed 53
45 cm (18”) Wine Column Panel Ready 56

COLUMNS MULTIPLE INSTALLATIONS **59**
105 cm (42”) Double Configurations 62
120 cm (48”) Double Configurations 63
135 cm (54”) Double Configurations 64
150 cm (60”) Double Configurations 65
150 cm (60”) Triple Configurations 66
165 cm (66”) Triple Configurations 67
180 cm (72”) Triple Configurations 68
195 cm (78”) Triple Configurations 69
210 cm (84”) Triple Configurations 70
225 cm (90”) Triple Configurations 71

Custom Door Panel 72
Recommended Installations 73
Refrigeration Handles 74
Toekick Panel 75

BUILT-IN BOTTOM MOUNT REFRIGERATORS **76**
90 cm (36”) Bottom Mount Panel Installed 78
90 cm (36”) Bottom Mount Panel Ready 81
75 cm (30”) Bottom Mount Panel Installed 84
75 cm (30”) Bottom Mount Panel Ready 87

BOTTOM MOUNT MULTIPLE INSTALLATIONS **90**
150 cm (60”) Bottom Mount Double Configurations 93
165 cm (66”) Bottom Mount Configurations 94
180 cm (72”) Bottom Mount Configurations 95
120 cm (48”) Double Configurations 96
135 cm (54”) Double Configurations 97
150 cm (60”) Double Configurations 98

Bottom Mount Custom Door Panel 99
Bottom Mount Refrigeration Handles 100

V TIER LINE UP **101**

BUILT-IN REFRIGERATOR COLUMNS **102**
75 cm (30”) Refrigerator Column Panel Ready 104

BUILT-IN FREEZER COLUMNS **107**
45 cm (18”) Freezer Column Panel Ready 109

COLUMNS MULTIPLE INSTALLATIONS **112**
120 cm (48”) Double Configurations 115

Custom Door Panel 116
Recommended Installations 117
Refrigeration Handles 118

BUILT-IN BOTTOM MOUNT AND FRENCH DOOR REFRIGERATORS **119**
90 cm (36”) French Door Bottom Mount Panel Ready 121
90 cm (36”) Bottom Mount Panel Ready 124
75 cm (30”) Bottom Mount Panel Ready 127

BOTTOM MOUNT MULTIPLE INSTALLATIONS **130**
150 cm (60”) Bottom Mount Double Configurations 133
165 cm (66”) Bottom Mount Double Configurations 134
180 cm (72”) Bottom Mount Double Configurations 135

French Door Custom Door Panel 136
Bottom Mount Custom Door Panel 137
French Door Refrigeration Handles 138
Bottom Mount Refrigeration Handles 139


T TIER LINE UP

BUILT-IN REFRIGERATOR COLUMNS

BUILT-IN COLUMNS

Refrigerators, freezers, and wine columns from the T tier are masterpieces of design and technology. Their stylish appearance reflects close attention to detail and high-quality materials, inside and out.
The stainless steel front and panel-ready doors are mounted with state-of-the-art engineered lift-and-swing hinges that give the perception of a weightless range of motion. Versatile installation options make it possible to bring together elegant configurations of the refrigerator, freezer, and wine column in any desired width. All three columns work in harmony with handles and finishes available for every Series.

90 cm - 75 cm - 60 cm
(36” - 30” - 24”)
Panel Ready and
Panel Installed






90 cm (36”) Refrigerator Column Panel Installed
Dimensions


LRD905UBLXTT/24 left hinge
LRD905UBRXTT/24 right hinge

Handle choices
Professional Series: PROHKCOL
Master series: MASHKCOL
Heritage Series: HERHKCOL


SIDE VIEW

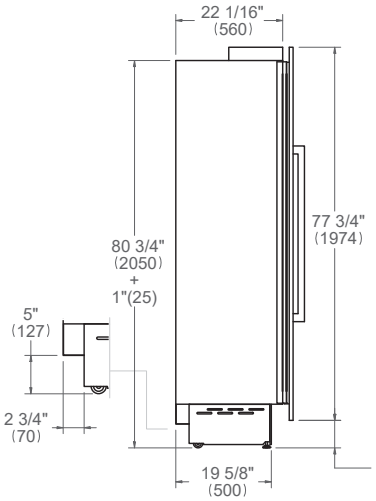


FRONT VIEW

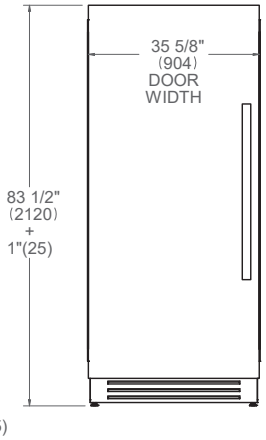


TOP VIEW

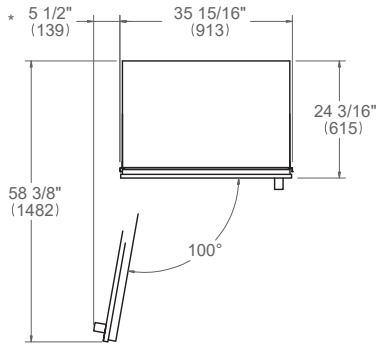


SIDE VIEW

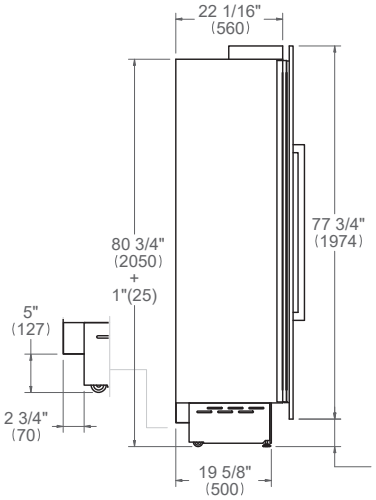

FRONT VIEW

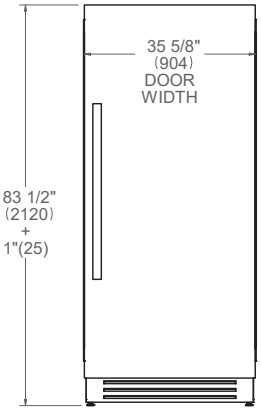

TOP VIEW

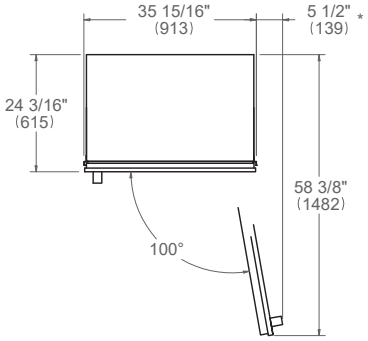

* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

90 cm (36”) Refrigerator Column Panel Installed
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	695 kg (1532 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 220 W 1,2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


90 cm (36”) Refrigerator Column Panel Installed

Flush installation


TOP VIEW [b]



SIDE VIEW

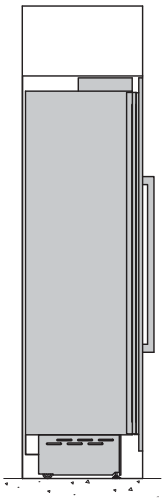

FRONT VIEW

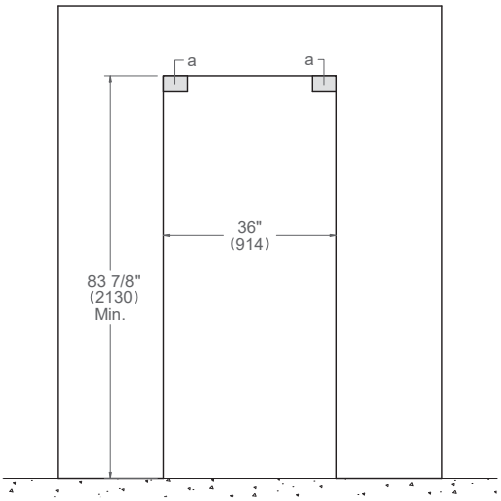


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


90 cm (36”) Refrigerator Column Panel Ready
Dimensions

LRD905UBLPTT/24 left hinge
LRD905UBRPTT/24 right hinge


SIDE VIEW

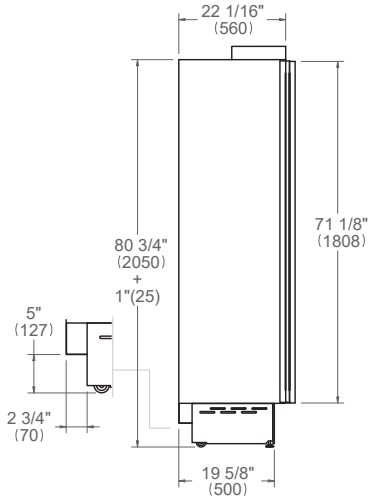


FRONT VIEW

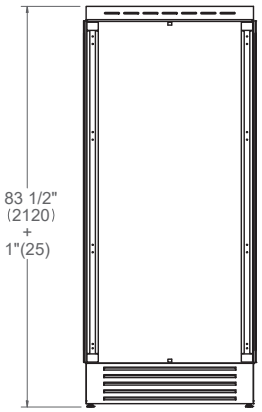


TOP VIEW

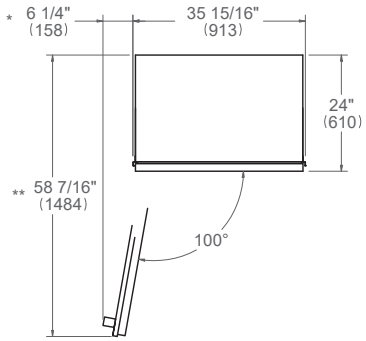


SIDE VIEW

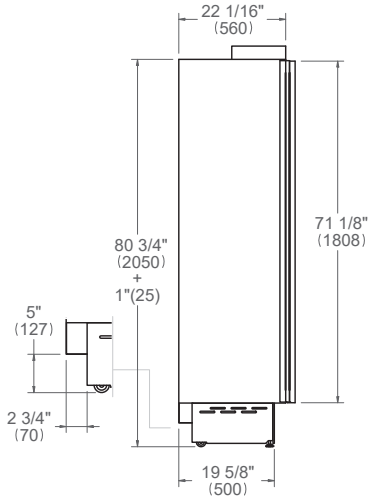

FRONT VIEW

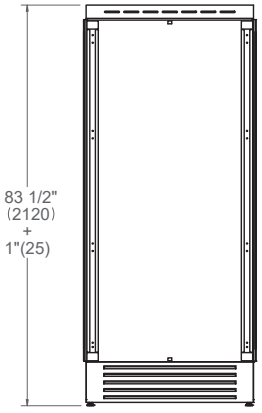

TOP VIEW

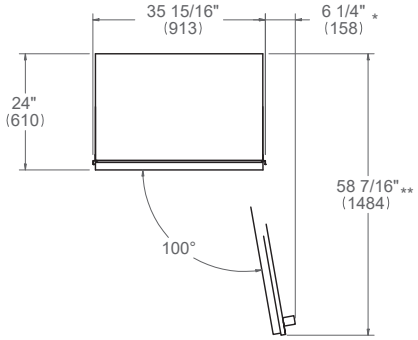

* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

90 cm (36”) Refrigerator Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	695 kg (1532 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.


Electrical supply	220-240 V 50/60 Hz 220 W 1,2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

90 cm (36”) Refrigerator Column Panel Ready
Flush installation


TOP VIEW [b]

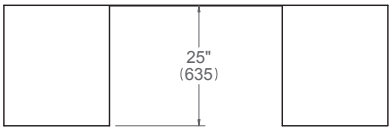

SIDE VIEW

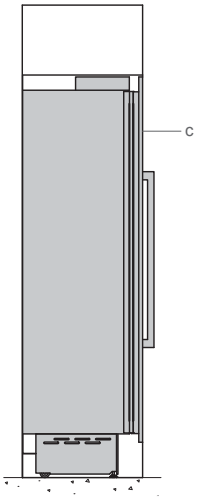

FRONT VIEW

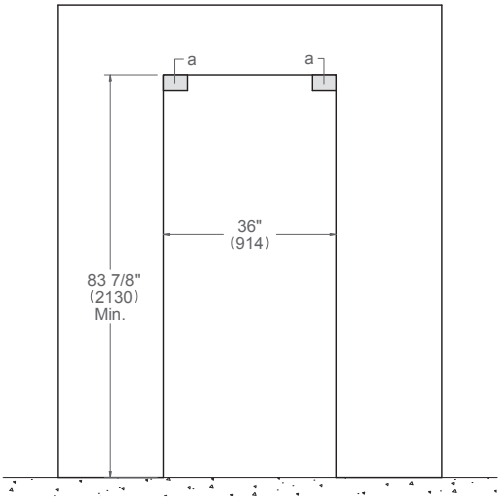

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

75 cm (30”) Refrigerator Column Panel Installed
Dimensions


LRD755UBLXTT/24 left hinge
LRD755UBRXTT/24 right hinge

Handle choices
Professional Series: PROHKCOL
Master series: MASHKCOL
Heritage Series: HERHKCOL


SIDE VIEW

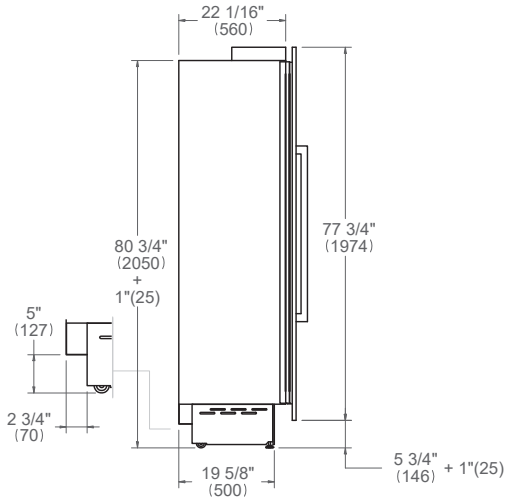


FRONT VIEW

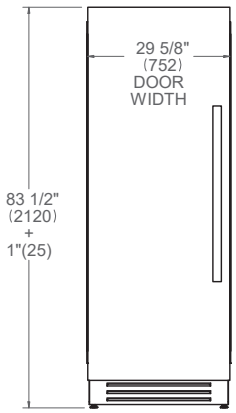


TOP VIEW




SIDE VIEW

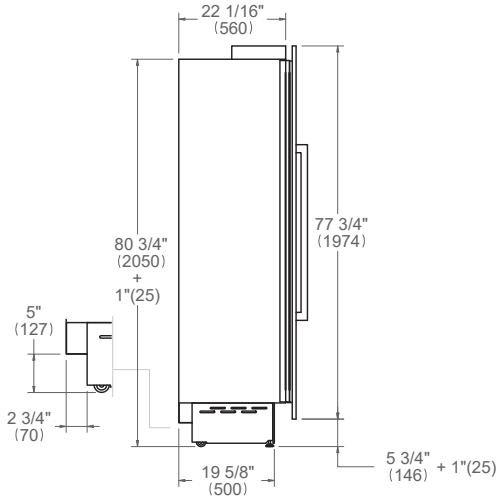

FRONT VIEW

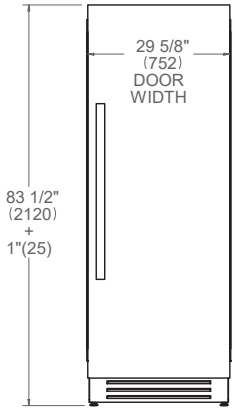

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Refrigerator Column Panel Installed
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 220 W 1,2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


75 cm (30”) Refrigerator Column Panel Installed

Flush installation


TOP VIEW [b]

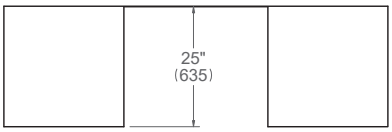

SIDE VIEW

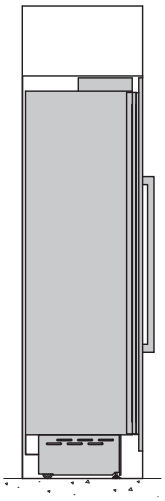

FRONT VIEW

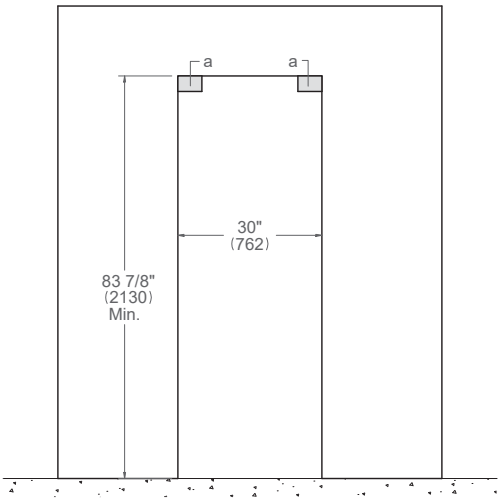


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


75 cm (30”) Refrigerator Column Panel Ready
Dimensions

LRD755UBLPTT/24 left hinge
LRD755UBRPTT/24 right hinge


SIDE VIEW

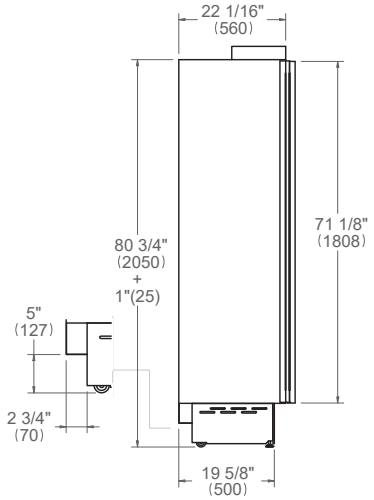


FRONT VIEW

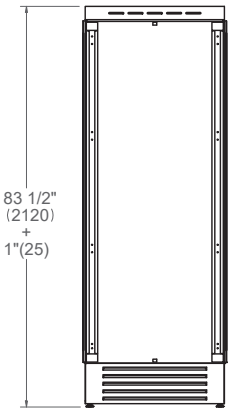


TOP VIEW




SIDE VIEW

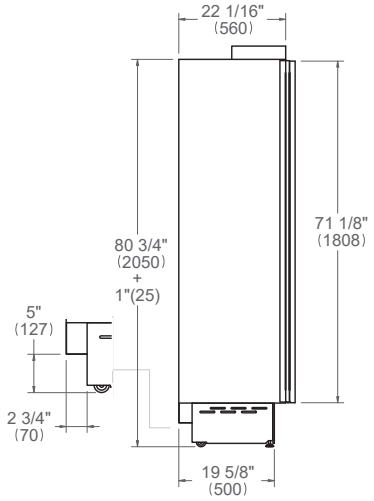

FRONT VIEW

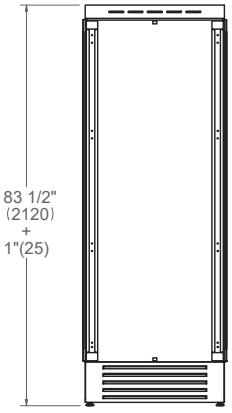

TOP VIEW

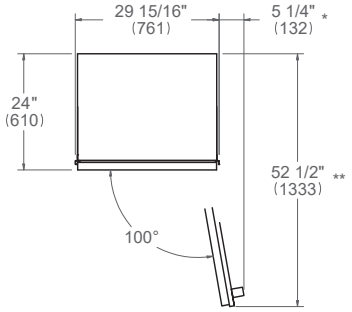

* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Refrigerator Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.


Electrical supply	220-240 V 50/60 Hz 220 W 1,2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Refrigerator Column Panel Ready
Flush installation


TOP VIEW [b]

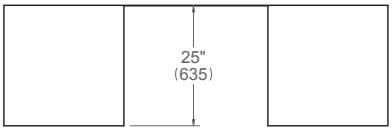

SIDE VIEW

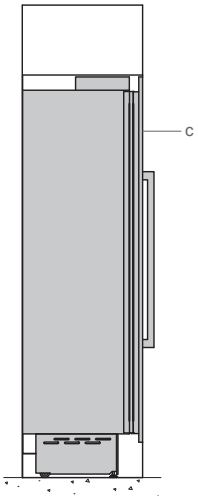

FRONT VIEW

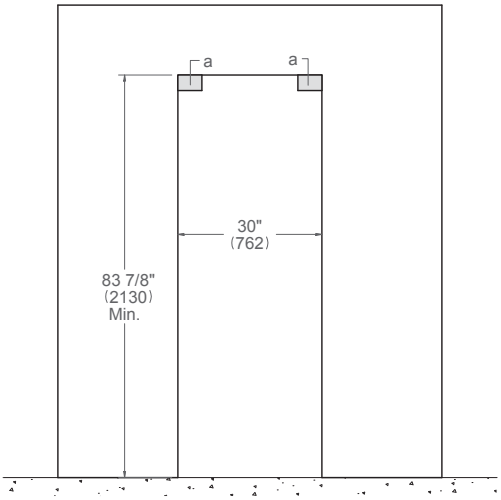

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

60 cm (24”) Refrigerator Column Panel Installed
Dimensions


LRD605UBLXTT/24 left hinge
LRD605UBRXTT/24 right hinge

Handle choices
Professional Series: PROHKCOL
Master series: MASHKCOL
Heritage Series: HERHKCOL


SIDE VIEW

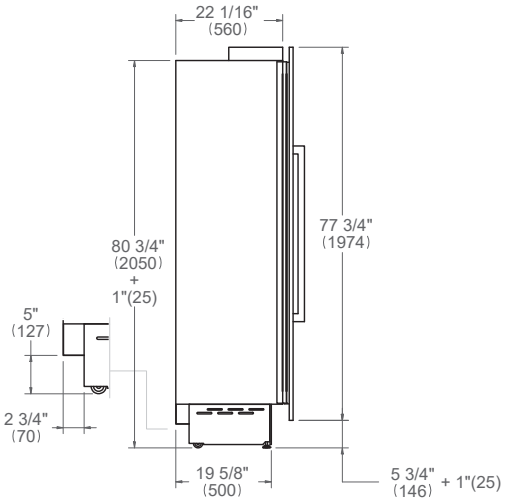


FRONT VIEW

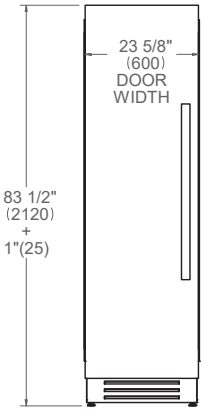


TOP VIEW




SIDE VIEW

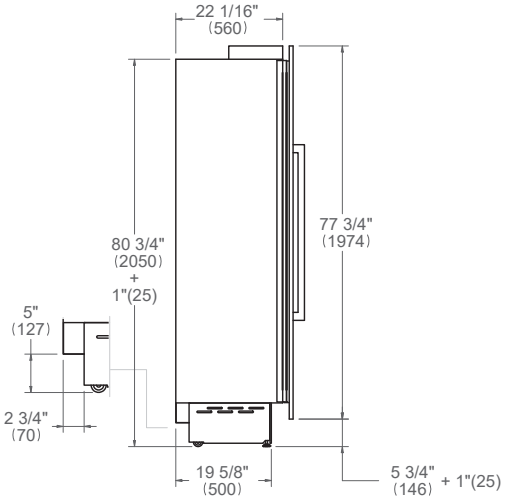

FRONT VIEW

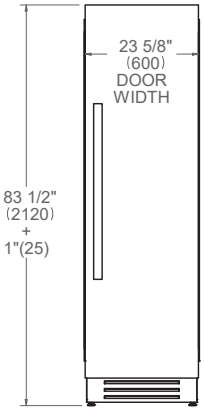

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

60 cm (24”) Refrigerator Column Panel Installed
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


60 cm (24”) Refrigerator Column Panel Installed

Flush installation


TOP VIEW [b]

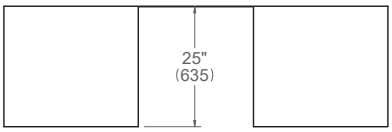

SIDE VIEW

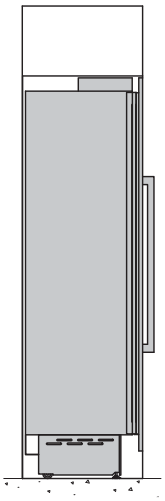

FRONT VIEW

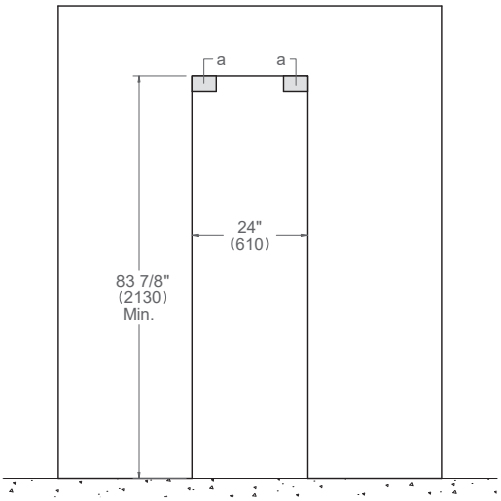


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


60 cm (24”) Refrigerator Column Panel Ready
Dimensions

LRD605UBLPTT/24 left hinge
LRD605UBRPTT/24 right hinge


SIDE VIEW

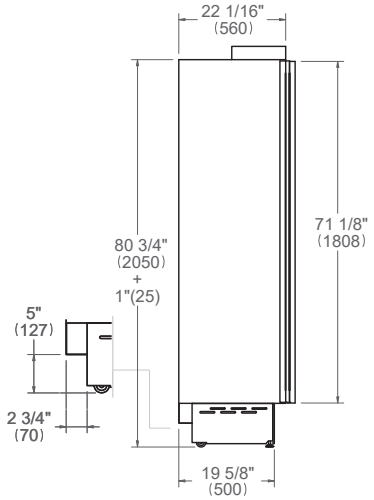


FRONT VIEW

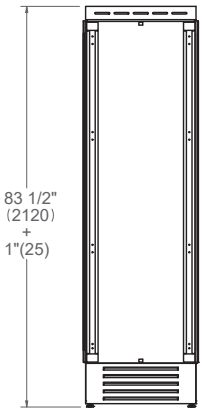


TOP VIEW




SIDE VIEW

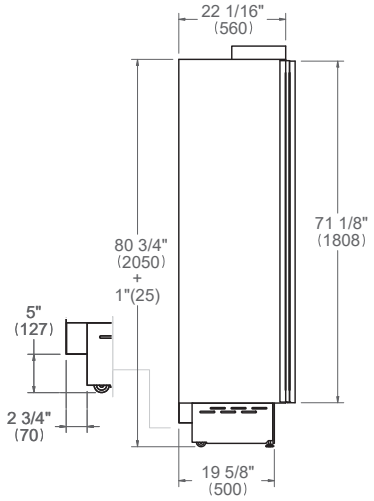

FRONT VIEW

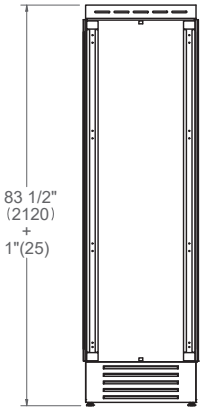

TOP VIEW



* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

60 cm (24”) Refrigerator Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.


Electrical supply	220-240 V 50/60 Hz 130 W 0,7 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

60 cm (24”) Refrigerator Column Panel Ready
Flush installation


TOP VIEW [b]

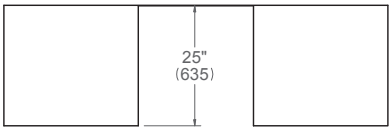

SIDE VIEW

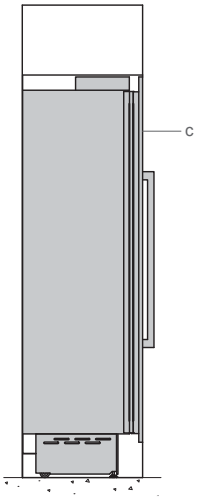

FRONT VIEW

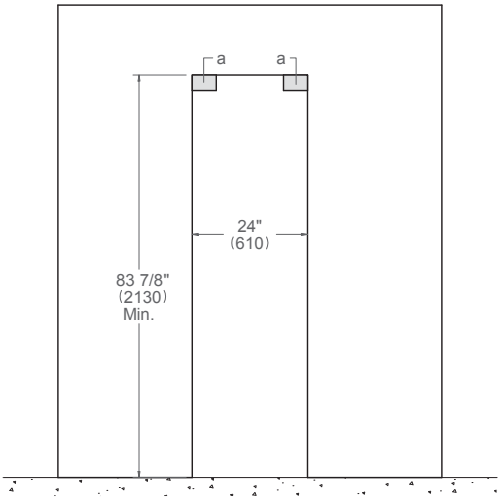


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

BUILT-IN FREEZER COLUMNS

75 cm - 60 cm - 45 cm
(30” - 24” - 18”)
Panel Ready and
Panel Installed






75 cm (30”) Freezer Column Panel Installed
Dimensions


FRZ755UBLXTT/24 left hinge
FRZ755UBRXTT/24 right hinge

Handle choices
Professional Series: PROHKCOL
Master series: MASHKCOL
Heritage Series: HERHKCOL


SIDE VIEW

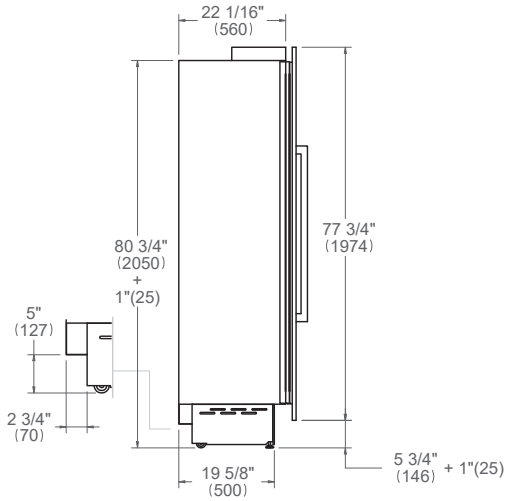


FRONT VIEW

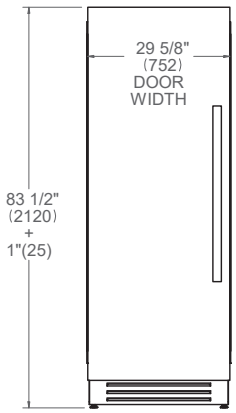


TOP VIEW




SIDE VIEW

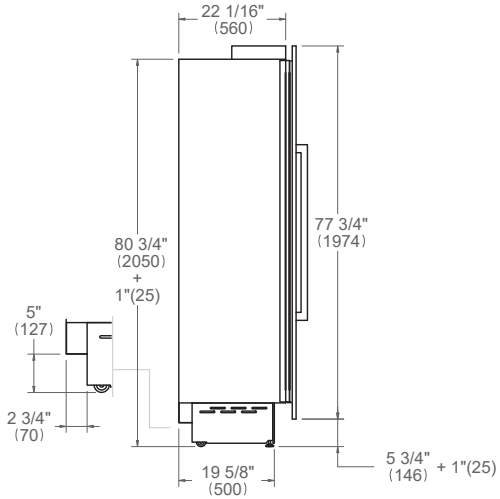

FRONT VIEW

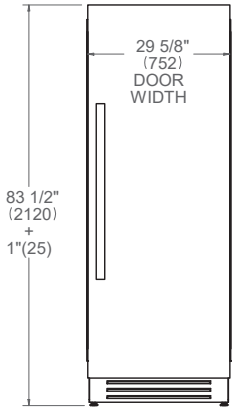

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Freezer Column Panel Installed
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between from 0.5 bar and 5 bar (between 8 PSI to 75 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


75 cm (30”) Freezer Column Panel Installed

Flush installation


TOP VIEW [b]



SIDE VIEW

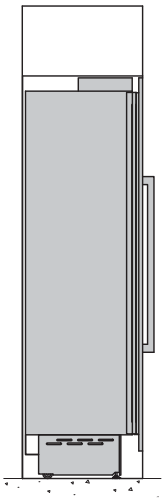

FRONT VIEW

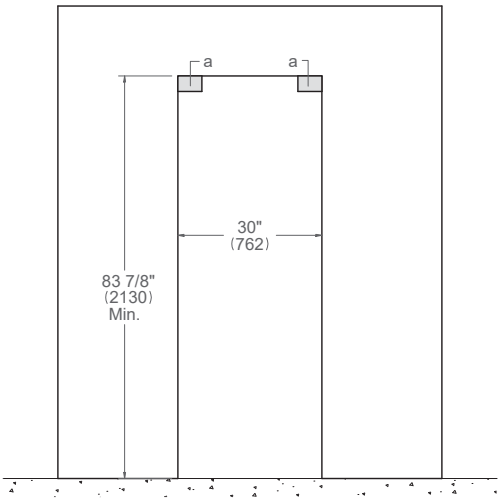


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


75 cm (30”) Freezer Column Panel Ready
Dimensions

FRZ755UBLPTT/24 left hinge
FRZ755UBRPTT/24 right hinge


SIDE VIEW

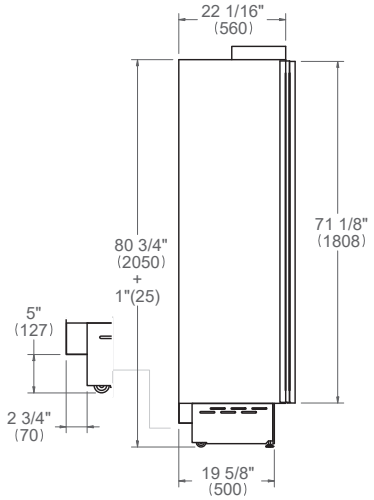


FRONT VIEW

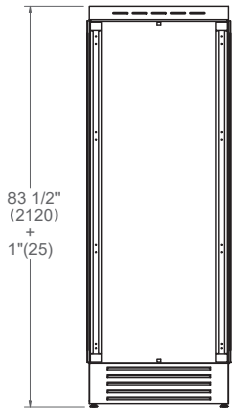


TOP VIEW




SIDE VIEW

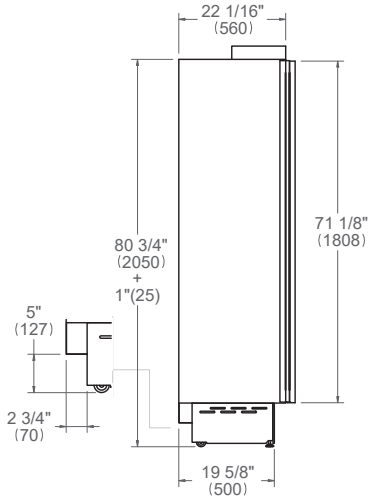

FRONT VIEW

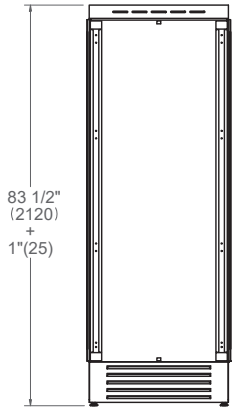

TOP VIEW

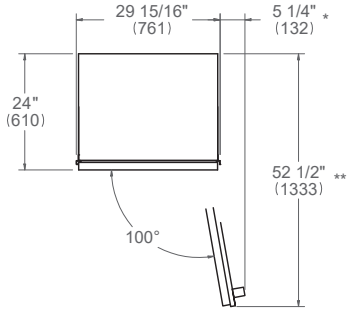

* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Freezer Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

PLUMBING REQUIREMENTS


Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between 0.5 bar and 5 bar (from 8 PSI to 75 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Freezer Column Panel Ready
Flush installation


TOP VIEW [b]



SIDE VIEW

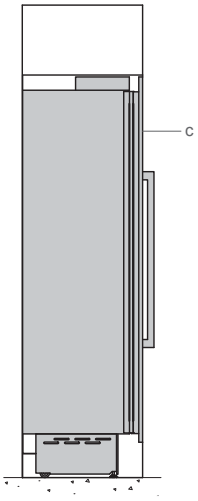

FRONT VIEW

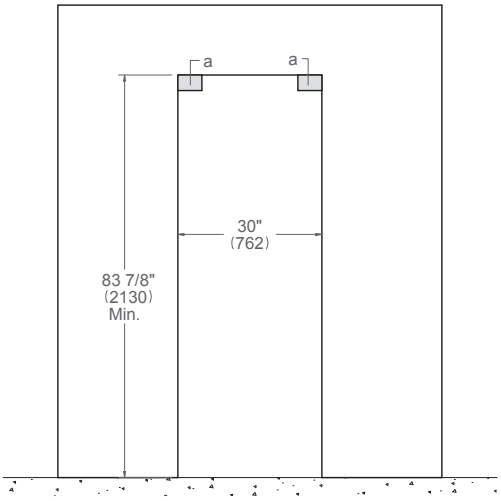

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

60 cm (24”) Freezer Column Panel Installed
Dimensions


FRZ605UBLXTT/24 left hinge
FRZ605UBRXTT/24 right hinge

Handle choices
Professional Series: PROHKCOL
Master series: MASHKCOL
Heritage Series: HERHKCOL


SIDE VIEW

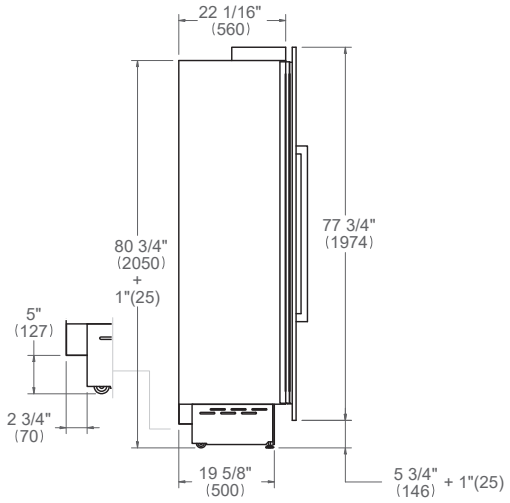


FRONT VIEW

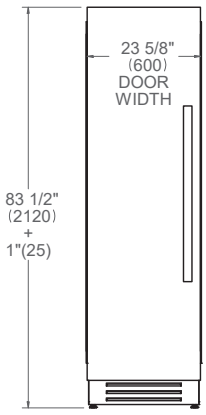


TOP VIEW




SIDE VIEW

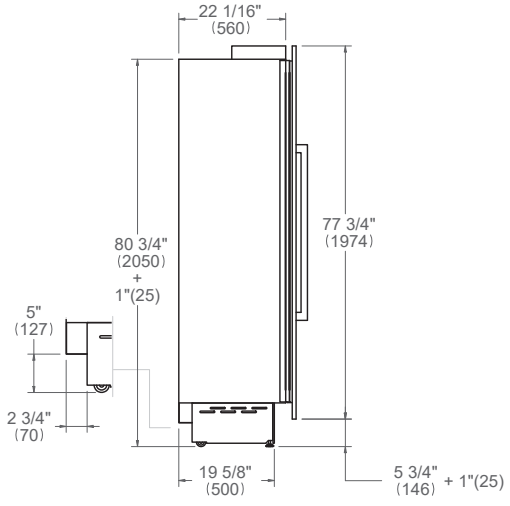

FRONT VIEW

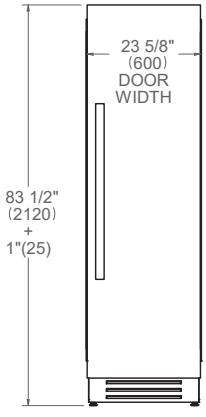

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

60 cm (24”) Freezer Column Panel Installed
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between from 0.5 bar and 5 bar (between 8 PSI to 75 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


60 cm (24”) Freezer Column Panel Installed

Flush installation


TOP VIEW [b]



SIDE VIEW

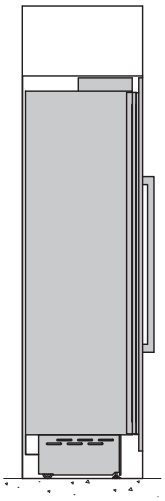

FRONT VIEW

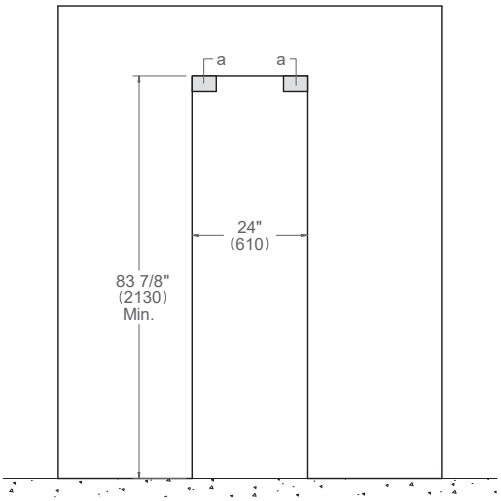


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


60 cm (24”) Freezer Column Panel Ready
Dimensions

FRZ605UBLPTT/24 left hinge
FRZ605UBRPTT/24 right hinge


SIDE VIEW

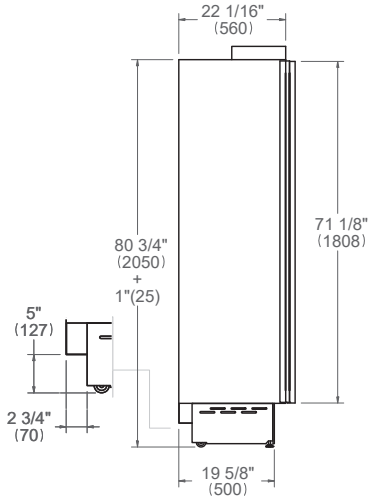


FRONT VIEW

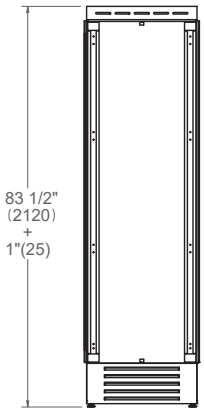


TOP VIEW




SIDE VIEW

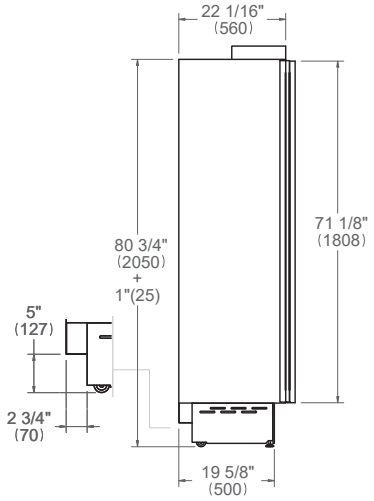

FRONT VIEW

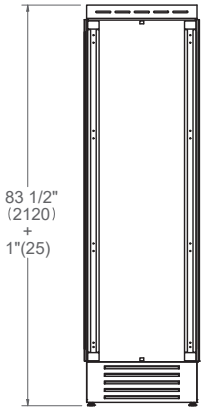

TOP VIEW



* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

60 cm (24”) Freezer Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

PLUMBING REQUIREMENTS


Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between 0.5 bar and 5 bar (from 8 PSI to 75 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

60 cm (24”) Freezer Column Panel Ready
Flush installation


TOP VIEW [b]



SIDE VIEW

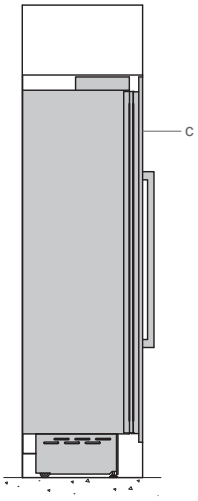

FRONT VIEW

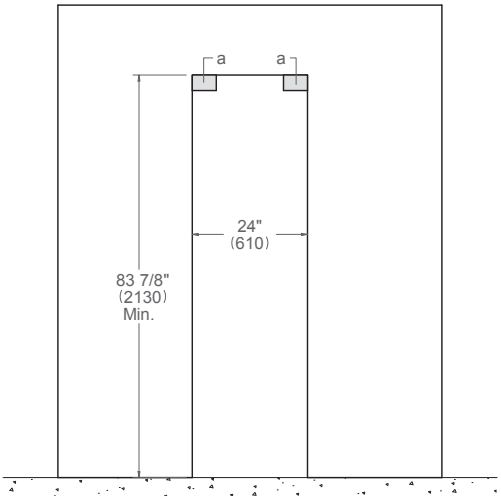

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

45 cm (18”) Freezer Column Panel Installed
Dimensions


FRZ455UBLXTT/24 left hinge
FRZ455UBRXTT/24 right hinge

Handle choices
Professional Series: PROHKCOL
Master series: MASHKCOL
Heritage Series: HERHKCOL


SIDE VIEW

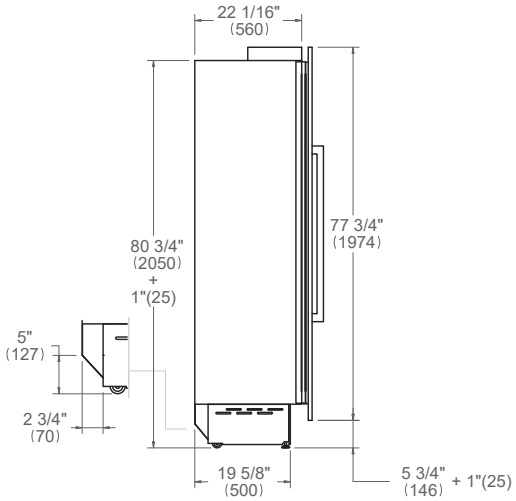


FRONT VIEW

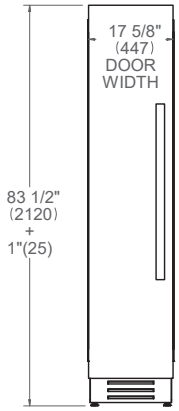


TOP VIEW




SIDE VIEW

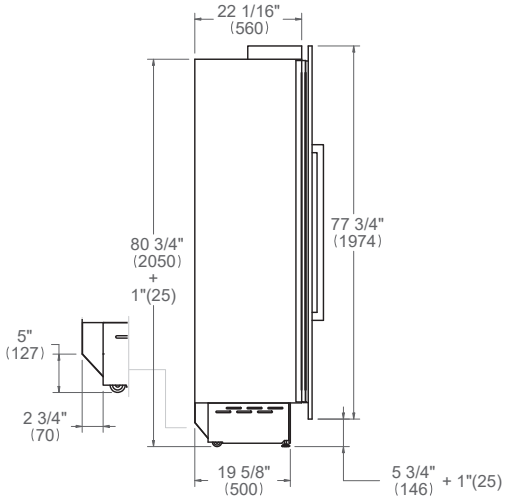

FRONT VIEW

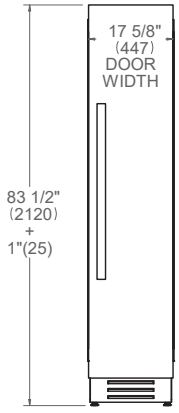

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

45 cm (18”) Freezer Column Panel Installed
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	315 kg (694 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between 0.5 bar and 5 bar (from 8 PSI to 75 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


45 cm (18”) Freezer Column Panel Installed

Flush installation


TOP VIEW [b]



SIDE VIEW

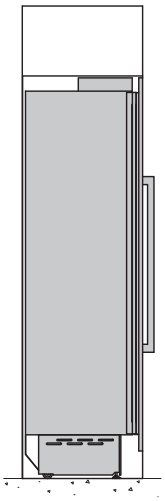

FRONT VIEW

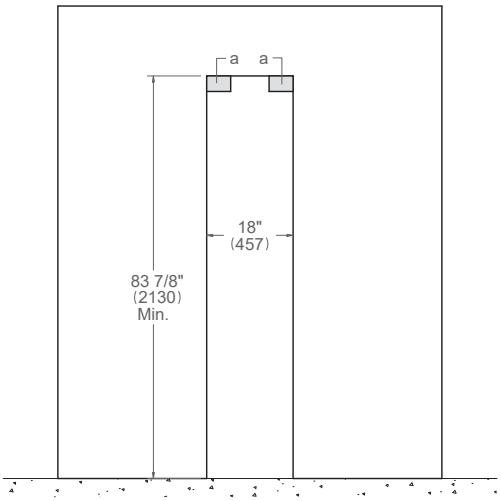


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


45 cm (18”) Freezer Column Panel Ready
Dimensions

FRZ455UBLPTT/24 left hinge
FRZ455UBRPTT/24 right hinge


SIDE VIEW

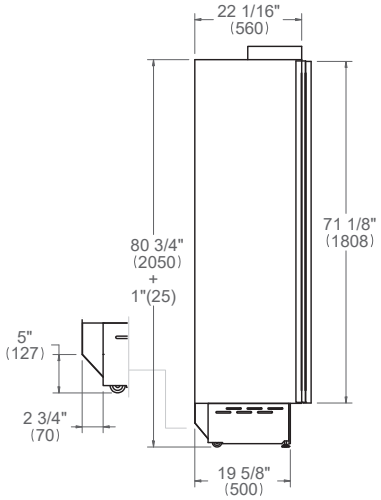


FRONT VIEW

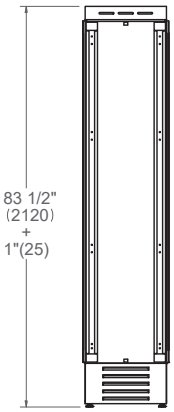


TOP VIEW




SIDE VIEW

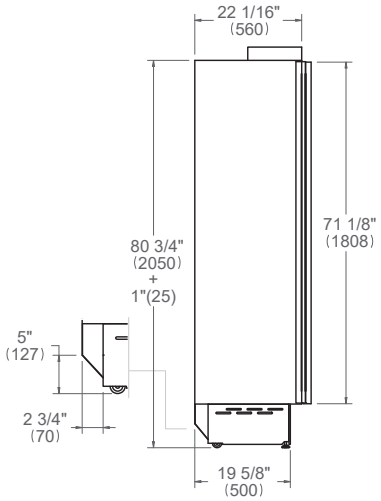

FRONT VIEW

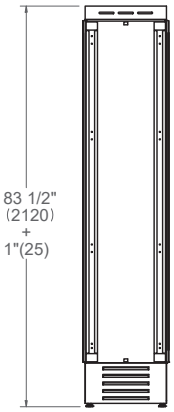

TOP VIEW



* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

45 cm (18”) Freezer Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	315 kg (694 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 2 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between from 0.5 bar and 5 bar (between 8 PSI to 75 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


45 cm (18”) Freezer Column Panel Ready

Flush installation


TOP VIEW [b]



SIDE VIEW

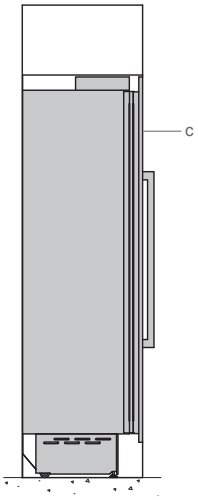

FRONT VIEW

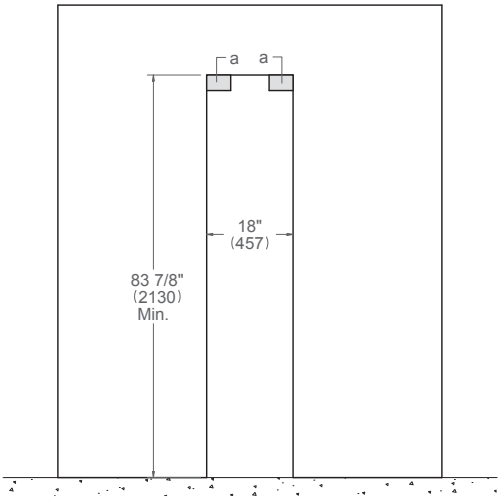


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

BUILT-IN WINE COLUMNS

60 cm - 45 cm
(24” - 18”)
Panel Ready and
Panel Installed





+ 54 °F
FUNZIONI
+ 46 °F
IMPOSTAZIONI
FILIBERTAZZI
ITALIA

60 cm (24”) Wine Column Panel Installed
Dimensions


WC605BLX2T left hinge
WC605BRX2T right hinge

Handle choices
Professional Series: PROHKCOL
Master series: MASHKCOL
Heritage Series: HERHKCOL


SIDE VIEW

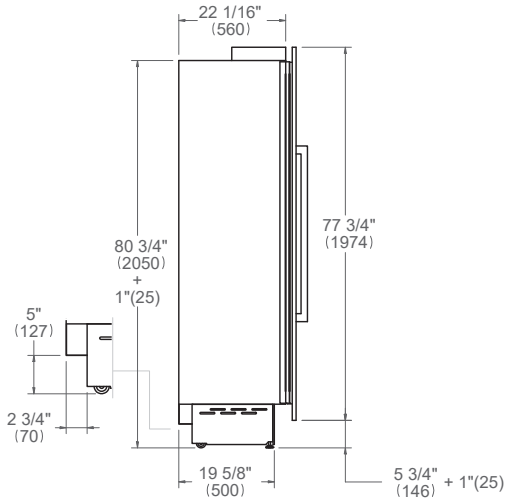


FRONT VIEW

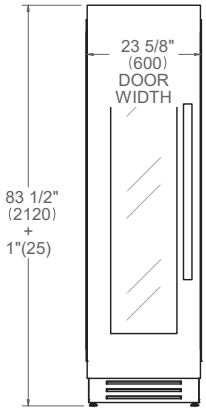


TOP VIEW




SIDE VIEW

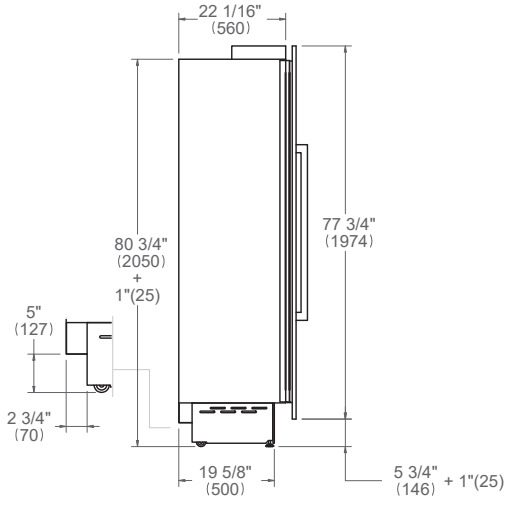

FRONT VIEW

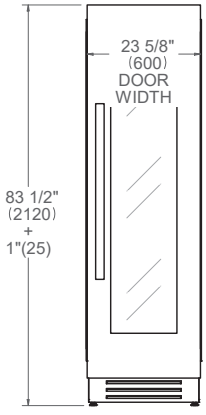

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

60 cm (24”) Wine Column Panel Installed
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


60 cm (24”) Wine Column Panel Installed

Flush installation


TOP VIEW [b]



SIDE VIEW

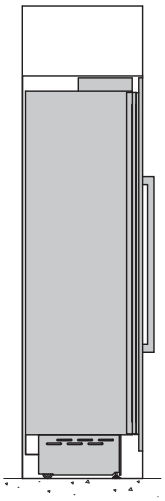

FRONT VIEW

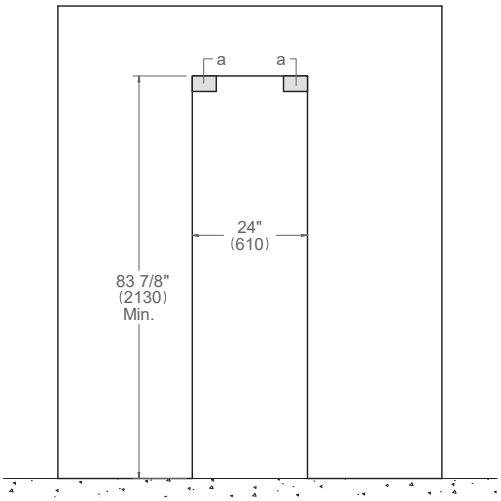


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


60 cm (24”) Wine Column Panel Ready
Dimensions

WC605BLP2T left hinge
WC605BRP2T right hinge


SIDE VIEW

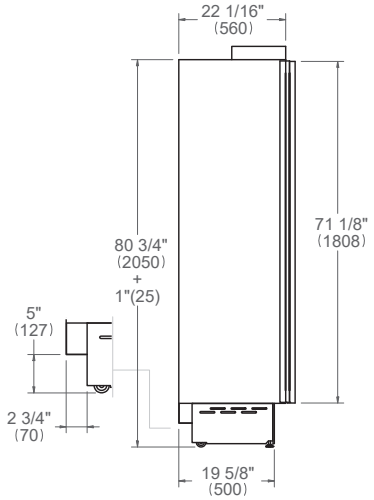


FRONT VIEW

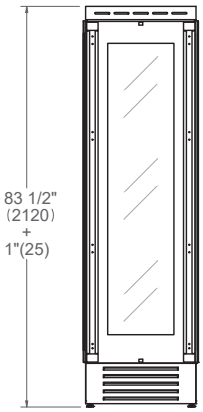


TOP VIEW




SIDE VIEW

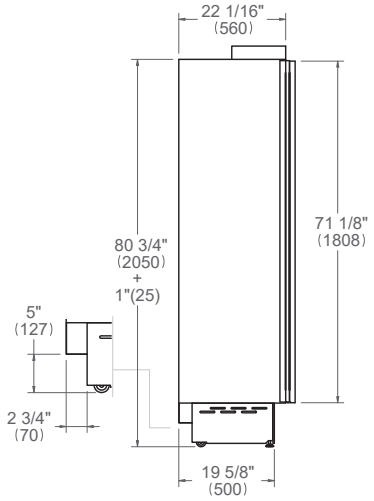

FRONT VIEW

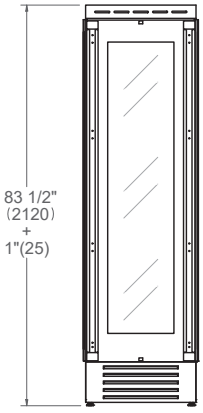

TOP VIEW



* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.
For custom panel dimensions and window cutout see page 69.

60 cm (24”) Wine Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


60 cm (24”) Wine Column Panel Ready

Flush installation


TOP VIEW [b]



SIDE VIEW

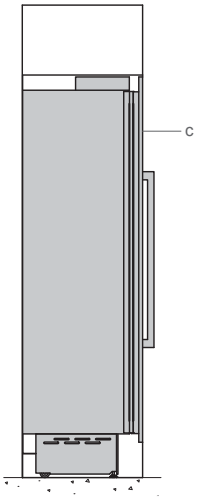

FRONT VIEW

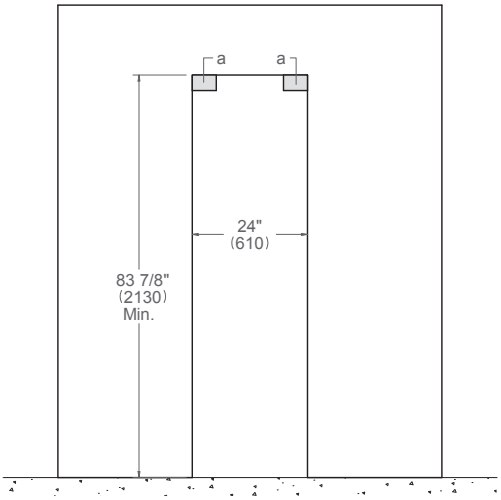

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

45 cm (18”) Wine Column Panel Installed
Dimensions


WC455BLX2T left hinge
WC455BRX2T right hinge

Handle choices
Professional Series: PROHKCOL
Master series: MASHKCOL
Heritage Series: HERHKCOL


SIDE VIEW

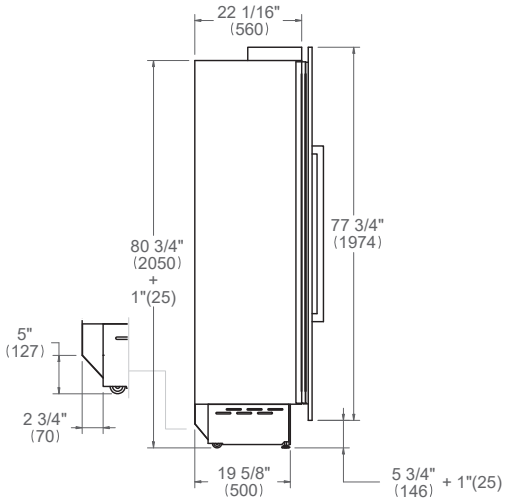


FRONT VIEW

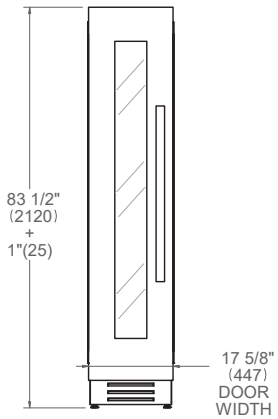


TOP VIEW




SIDE VIEW

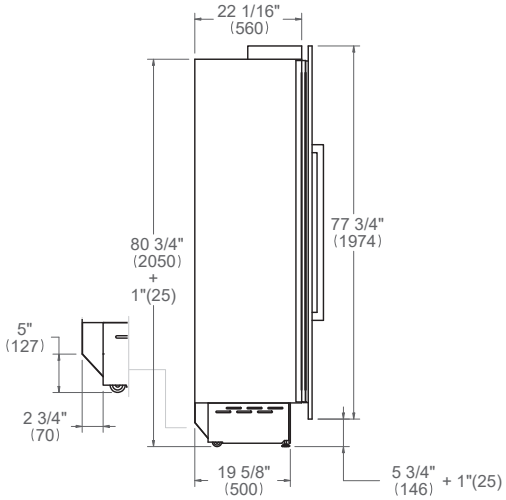

FRONT VIEW

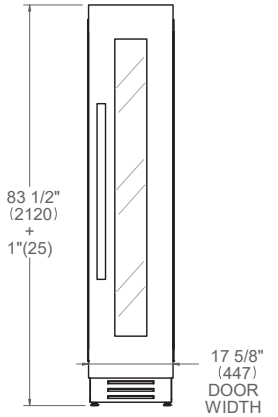

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.

45 cm (18”) Wine Column Panel Installed
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	315 kg (694 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


45 cm (18”) Wine Column Panel Installed

Flush installation


TOP VIEW [b]



SIDE VIEW

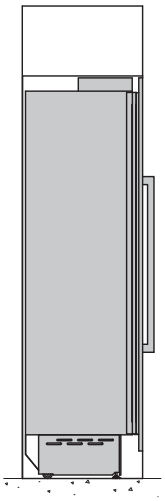

FRONT VIEW

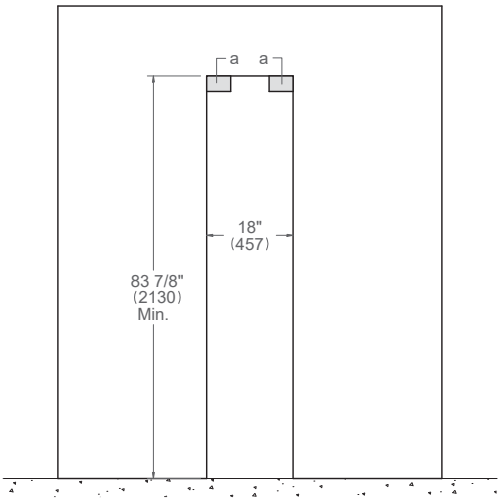


(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


45 cm (18”) Wine Column Panel Ready
Dimensions

WC455BLP2T left hinge
WC455BRP2T right hinge


SIDE VIEW

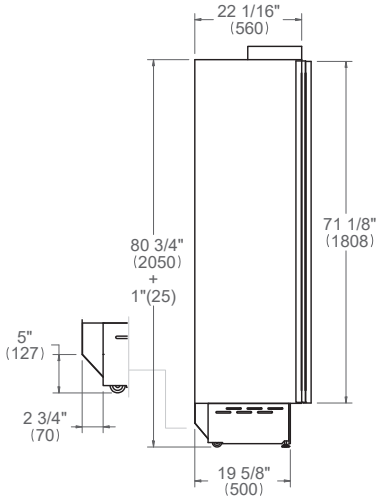


FRONT VIEW

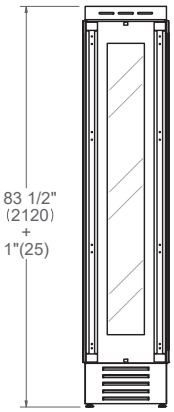


TOP VIEW




SIDE VIEW

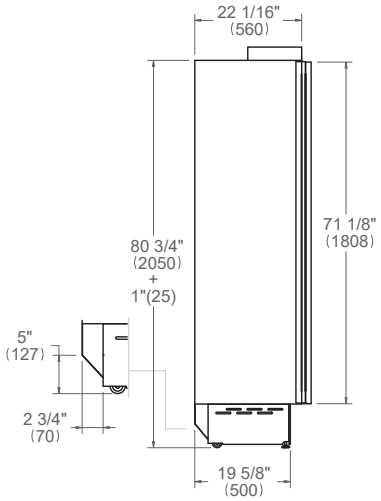

FRONT VIEW

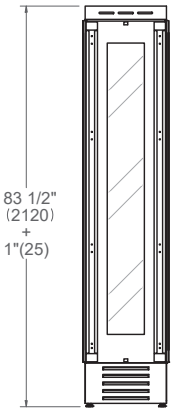

TOP VIEW



* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 72
For detailed handle dimensions see page 74

Dimensions in parentheses are millimeters unless otherwise specified.
For custom panel dimensions and window cutout see page 69.

45 cm (18”) Wine Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	315 kg (694 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.


Electrical supply	220-240 V 50/60 Hz 130 W 0,7 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2 m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

45 cm (18”) Wine Column Panel Ready
Flush installation


TOP VIEW [b]



SIDE VIEW

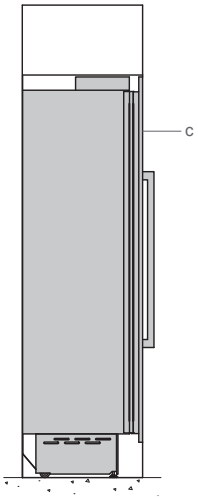

FRONT VIEW

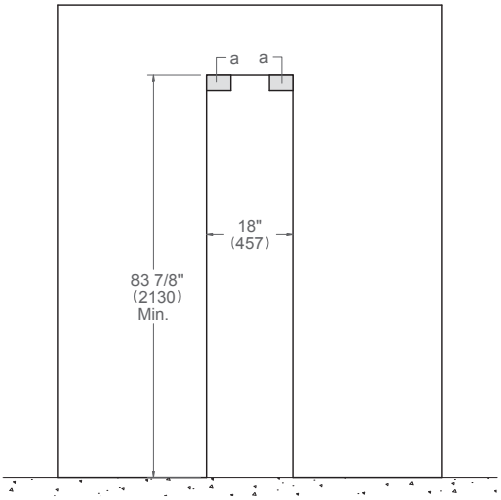

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

COLUMNS MULTIPLE INSTALLATIONS



Multiple installations
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliances and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

For instructions of product combinations please see the Multiple Installation Section (page 59).


CABINET REQUIREMENT

Installation of the appliances must be performed in accordance with the provisions of applicable legislation.
Be sure that support of these appliances is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of all the appliances when in use. Please see any single product installation manual for required floor support.


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate 10 Amp circuit breaker servicing only these appliances is recommended.

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between 0.5 bar and 5 bar (from 8 PSI to 75 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

105 cm (42”) Double Configurations


Flush installation

POSSIBLE COMBINATIONS [c]


LRD605UB(L/R)XTT/24
FRZ455UB(L/R)XTT/24
LRD605UB(L/R)PTT/24
FRZ455UB(L/R)PTT/24




LRD605UB(L/R)XTT/24
WC455B(L/R)X2T/24
LRD605UB(L/R)PTT/24
FRZ455UB(L/R)PTT/24



TOP VIEW [b]

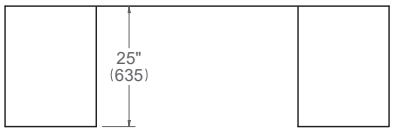

FRONT VIEW

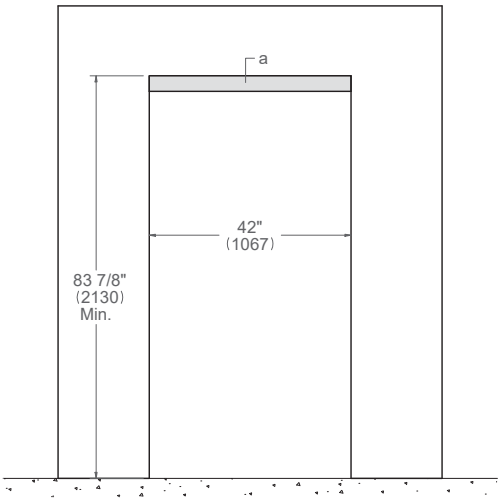

(a) Area to be left clear for the anti-tipping brackets – 1067x100 mm (42”x4”)
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.
c: Optional 105 cm (42 inch) bridge toe kick accessory is available. For details see page 75


120 cm (48”) Double Configurations

Flush installation

POSSIBLE COMBINATIONS [c]


LRD755UB(L/R)XTT/24
FRZ455UB(L/R)XTT/24

LRD755UB(L/R)PTT/24
FRZ455UB(L/R)PTT/24




LRD755UB(L/R)XTT/24
WC455B(L/R)X2T/24

LRD755UB(L/R)PTT/24
WC455B(L/R)P2T/24




LRD605UB(L/R)XTT/24
FRZ605UB(L/R)XTT/24

LRD605UB(L/R)PTT/24
FRZ605UB(L/R)PTT/24



LRD605UB(L/R)XTT/24
WC605B(L/R)X2T/24


LRD605UB(L/R)PTT/24
WC605B(L/R)P2T/24



TOP VIEW [b]



FRONT VIEW

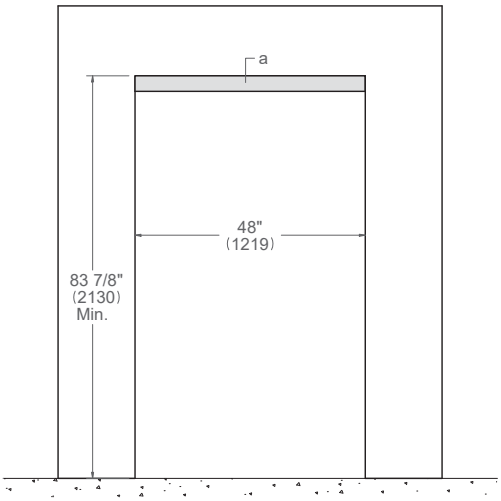

a: Area to be left clear for the anti-tipping brackets – 1219x100 mm (48”x4”)

b: Depth includes kitchen cabinet front panel.

c: Optional 102 cm (48 inch) bridge toe kick accessory is available. For details see page 75

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


135 cm (54”) Double Configurations

Flush installation

POSSIBLE COMBINATIONS


LRD755UB(L/R)XTT/24
FRZ605UB(L/R)XTT/24

LRD755UB(L/R)PTT/24
FRZ605UB(L/R)PTT/24




LRD755UB(L/R)XTT/24
WC455B(L/R)X2T/24

LRD755UB(L/R)PTT/24
WC455B(L/R)P2T/24




LRD905UB(L/R)XTT/24
FRZ455UB(L/R)XTT/24

LRD905UB(L/R)PTT/24
FRZ455UB(L/R)PTT/24



LRD905UB(L/R)PTT/24
WC455B(L/R)X2T/24


LRD905UB(L/R)PTT/24
WC455B(L/R)P2T/24



TOP VIEW [b]



FRONT VIEW

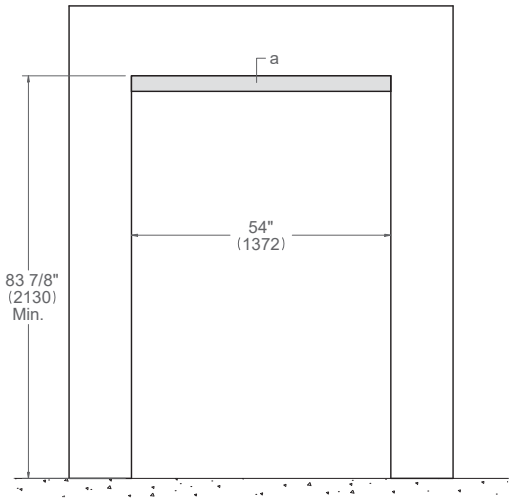

a: Area to be left clear for the anti-tipping brackets – 1372x100 mm (54”x4”)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


150 cm (60”) Double Configurations

Flush installation

POSSIBLE COMBINATIONS


LRD755UB(L/R)XTT/24
FRZ755UB(L/R)XTT/24

LRD755UB(L/R)PTT/24
FRZ755UB(L/R)PTT/24




LRD905UB(L/R)XTT/24
WC605B(L/R)X2T/24

LRD905UB(L/R)PTT/24
WC605B(L/R)P2T/24



LRD905UB(L/R)XTT/24
FRZ605UB(L/R)XTT/24


LRD905UB(L/R)PTT/24
FRZ605UB(L/R)PTT/24



TOP VIEW [b]



FRONT VIEW

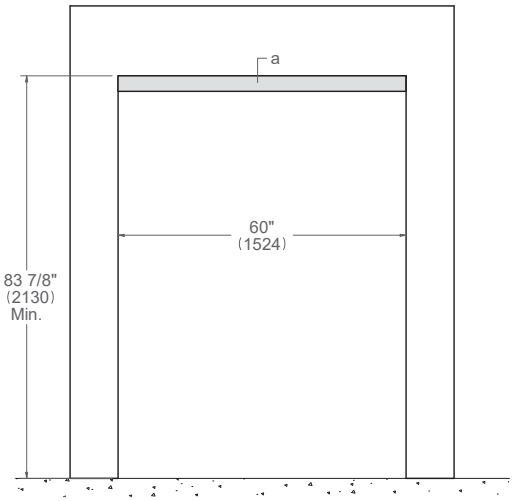

a: Area to be left clear for the anti-tipping brackets – 1524x100 mm (60”x4”)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


150 cm (60”) Triple Configurations

Flush installation

POSSIBLE COMBINATIONS

LRD605UB(L/R)XTT/24
FRZ455UB(L/R)XTT/24
WC455B(L/R)X2T/24


LRD605UB(L/R)PTT/24
FRZ455UB(L/R)PTT/24
WC455B(L/R)P2T/24

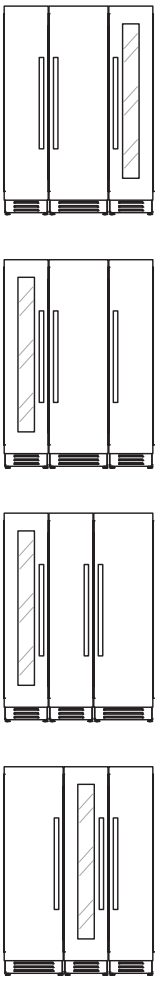

TOP VIEW [b]



FRONT VIEW

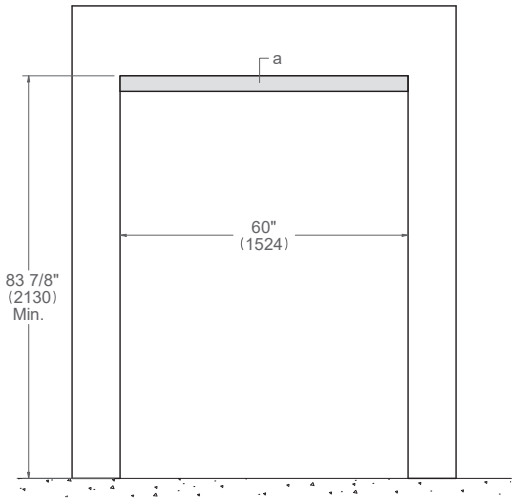

a: Area to be left clear for the anti-tipping brackets – 1524x100 mm (60”x4”)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


165 cm (66”) Triple Configurations

Flush installation

POSSIBLE COMBINATIONS

LRD755UB(L/R)XTT/24
FRZ455UB(L/R)XTT/24
WC455B(L/R)X2T/24


LRD755UB(L/R)PTT/24
FRZ455UB(L/R)PTT/24
WC455B(L/R)P2T/24

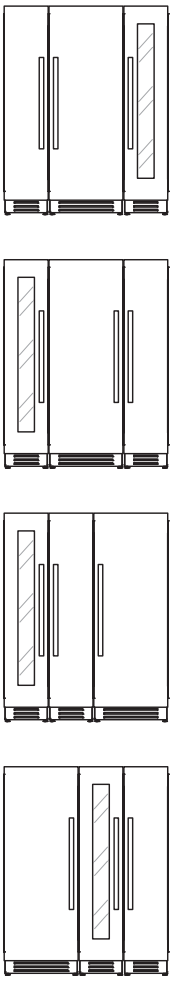

TOP VIEW [b]



FRONT VIEW

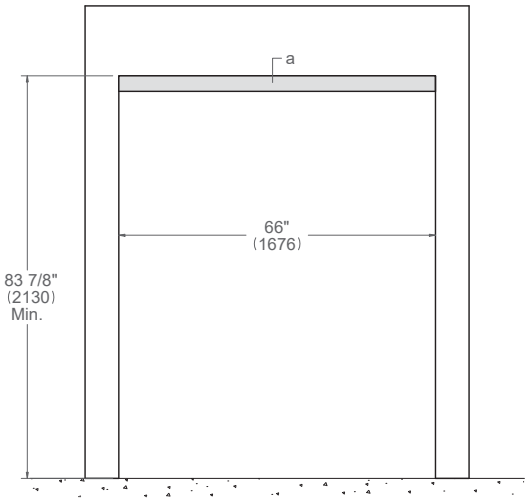

a: Area to be left clear for the anti-tipping brackets – 1676x100 mm (66”x4”)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


180 cm (72”) Triple Configurations

Flush installation

POSSIBLE COMBINATIONS

LRD605UB(L/R)XTT/24
FRZ605UB(L/R)XTT/24
WC605B(L/R)X2T/24


LRD605UB(L/R)PTT/24
FRZ605UB(L/R)PTT/24
WC605B(L/R)P2T/24

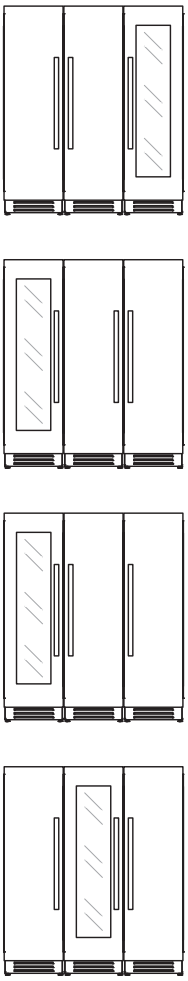

TOP VIEW [b]



FRONT VIEW

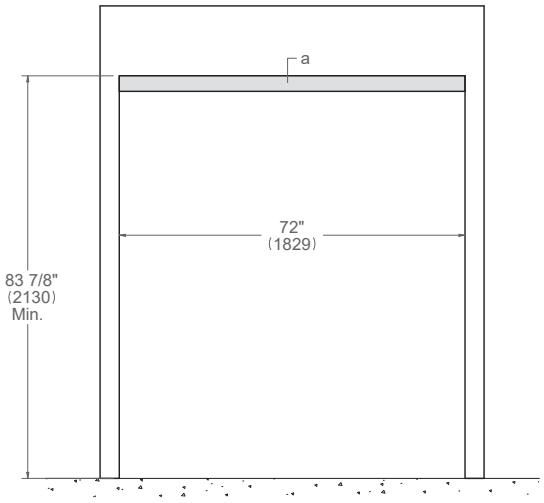

a: Area to be left clear for the anti-tipping brackets – 1829x100 mm (72”x4”)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


195 cm (78”) Triple Configurations


Flush installation


POSSIBLE COMBINATIONS


LRD755UB(L/R)XTT/24
FRZ605UB(L/R)XTT/24
WC605B(L/R)X2T/24

LRD755UB(L/R)PTT/24
FRZ605UB(L/R)PTT/24
WC605B(L/R)P2T/24










TOP VIEW [b]



FRONT VIEW

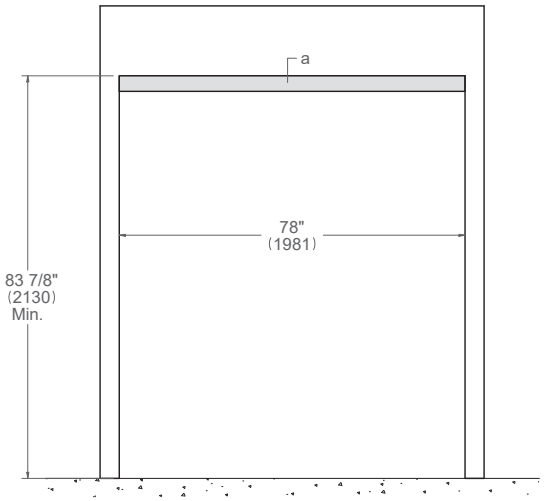

a: Area to be left clear for the anti-tipping brackets – 1981x100 mm (78”x4”)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


210 cm (84”) Triple Configurations

Flush installation

POSSIBLE COMBINATIONS


LRD905UB(L/R)XTT/24
FRZ755UB(L/R)XTT/24
WC455B(L/R)X2T/24

LRD905UB(L/R)PTT/24
FRZ755UB(L/R)PTT/24
WC455B(L/R)P2T/24




LRD755UB(L/R)XTT/24
FRZ755UB(L/R)XTT/24
WC605B(L/R)X2T/24


LRD755UB(L/R)PTT/24
FRZ755UB(L/R)PTT/24
WC605B(L/R)P2T/24



LRD905UB(L/R)XTT/24
FRZ605UB(L/R)XTT/24
WC605B(L/R)P2T/24

LRD905UB(L/R)PTT/24
FRZ605UB(L/R)PTT/24
WC605B(L/R)P2T/24






TOP VIEW [b]



FRONT VIEW

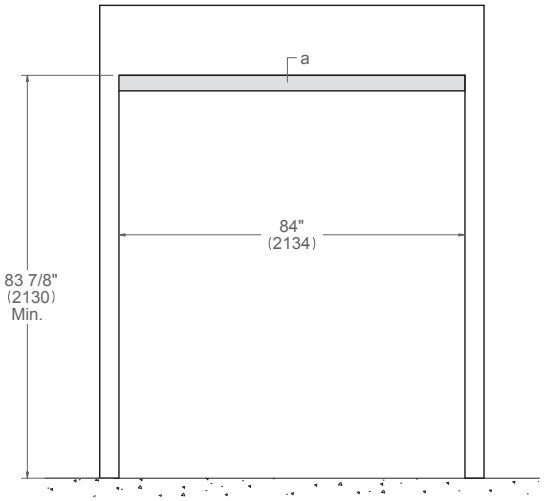

a: Area to be left clear for the anti-tipping brackets – 2134x100 mm (84”x4”)

b: Depth includes kitchen cabinet front panel.

Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.


225 cm (90”) Triple Configurations


Flush installation


POSSIBLE COMBINATIONS [c]


LRD905UB(L/R)XTT/24
FRZ755UB(L/R)XTT/24
WC605B(L/R)X2T/24

LRD905UB(L/R)PTT/24
FRZ755UB(L/R)PTT/24
WC605B(L/R)P2T/24










TOP VIEW [b]



FRONT VIEW

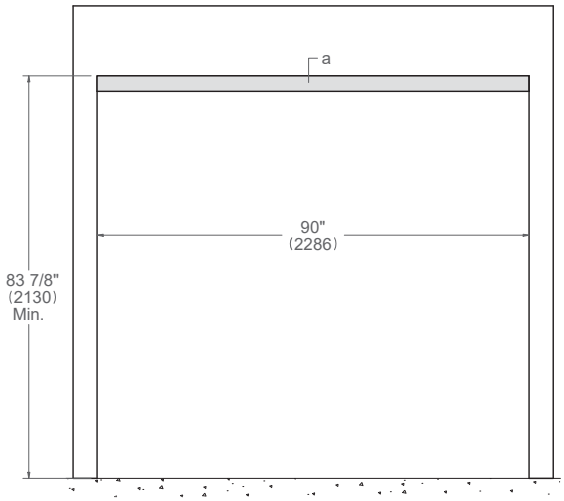

a: Area to be left clear for the anti-tipping brackets – 2286x100 mm (90”x4”)

b: Depth includes kitchen cabinet front panel.

c: Optional 105 cm (42 inch) bridge toe kick accessory is available. For details see page 75


Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.

Custom Door Panel

REAR PANEL DRILLING

WINE COLUMN DOOR WINDOW DIMENSIONS

CUSTOM HANDLES MOUNTING AREA

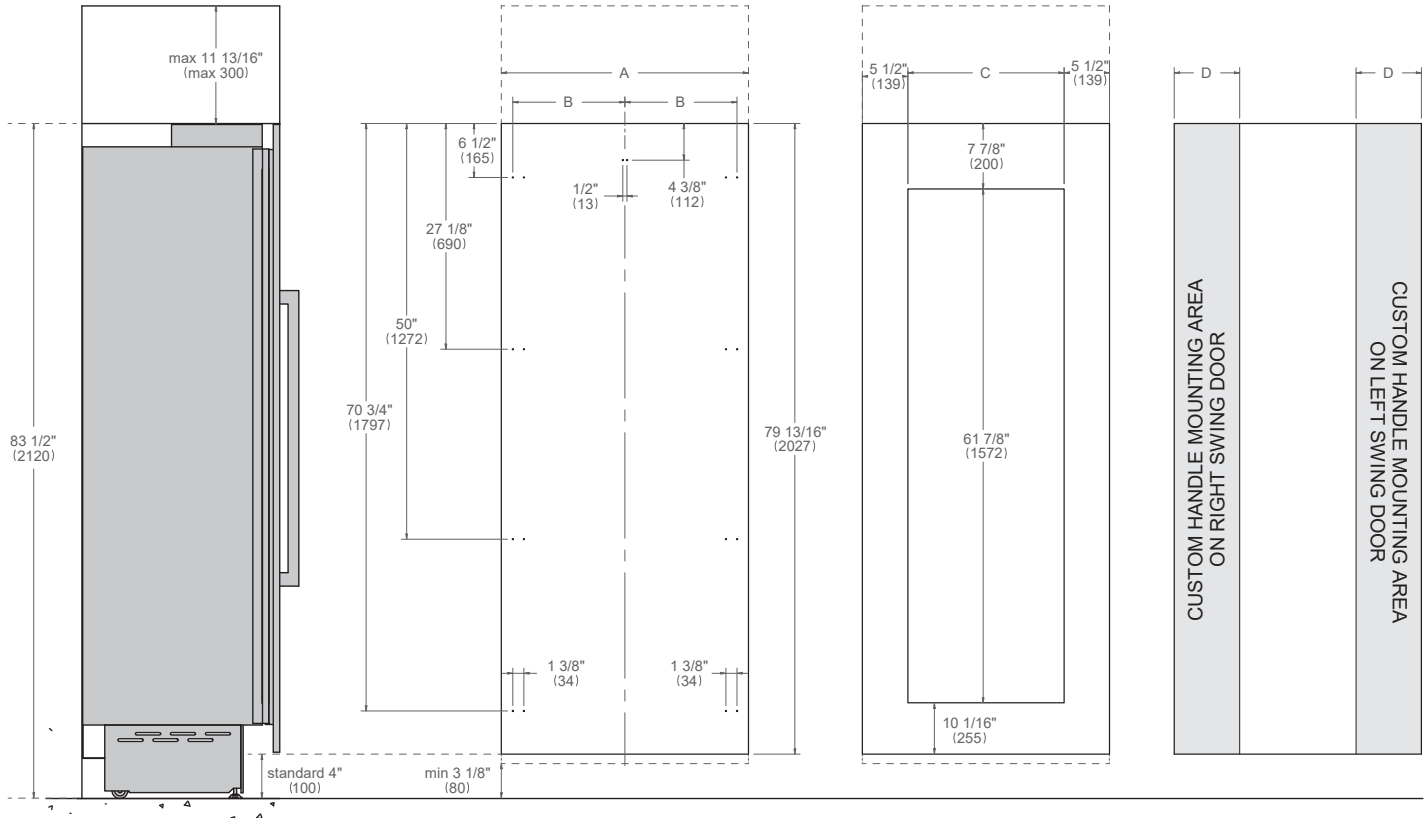


	90 cm (36”)	75 cm (30”)	60 cm (24”)	45 cm (18”)
A	908 mm (35 3/4”)	756 mm (29 3/4”)	604 mm (23 3/4”)	451 mm (17 3/4”)
B	418 mm (16 1/2”)	343 mm (13 1/2”)	275 mm (10 7/8”)	200 mm (7 7/8”)
C	–	–	327 mm (12 7/8”)	177 mm (6 7/8”)
D	182 mm (7 1/8”)	152 mm (6”)	121 mm (4 3/4”)	92 mm (3 5/8”)


Dimensions in parentheses are millimeters unless otherwise specified.
Minimum gap between custom door panels and adjacent cabinetry is 3 mm (1/8”).

Recommended Installations

RECOMMENDED INSTALLATIONS

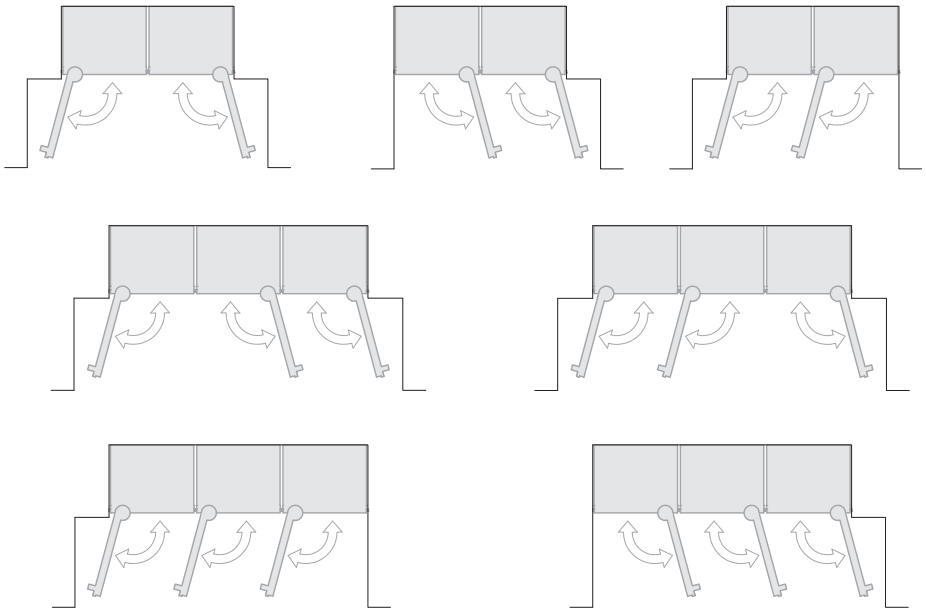


NOT RECOMMENDED INSTALLATIONS

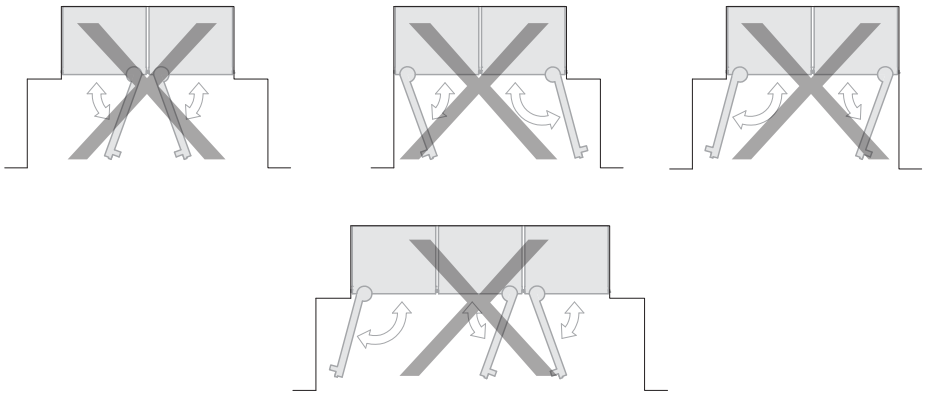


Refrigeration Handles


PROFESSIONAL SERIES
PROHKCOL




MASTER SERIES
MASHKCOL




HERITAGE SERIES
HERHKCOL



BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR

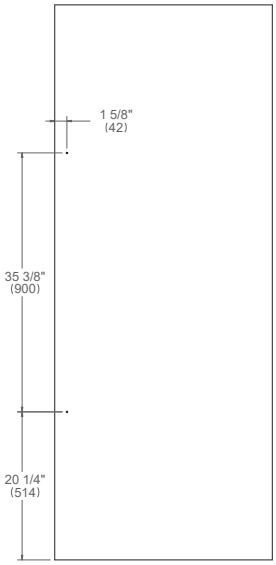

BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR

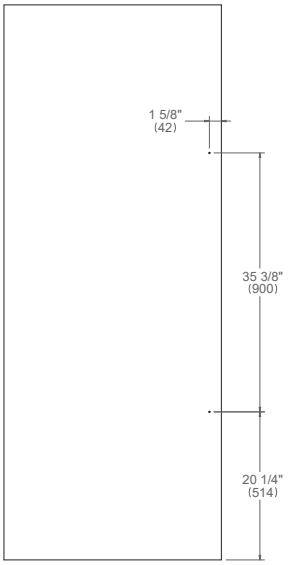


HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles,it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel.
Recommended drill bit size to drill the pilot hole is 9,5 mm (3/8”).


Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.

Toekick Panel

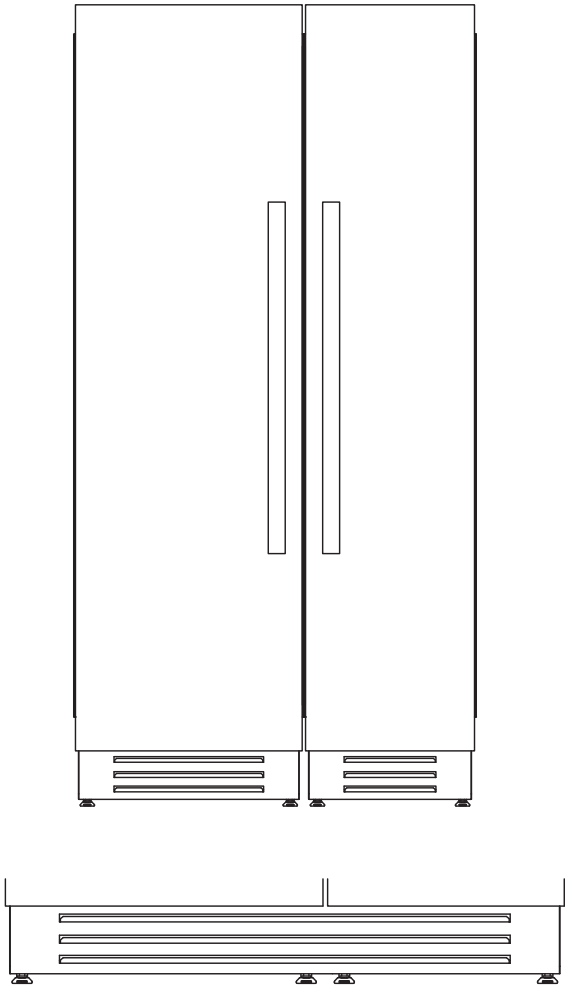

Part number 901560

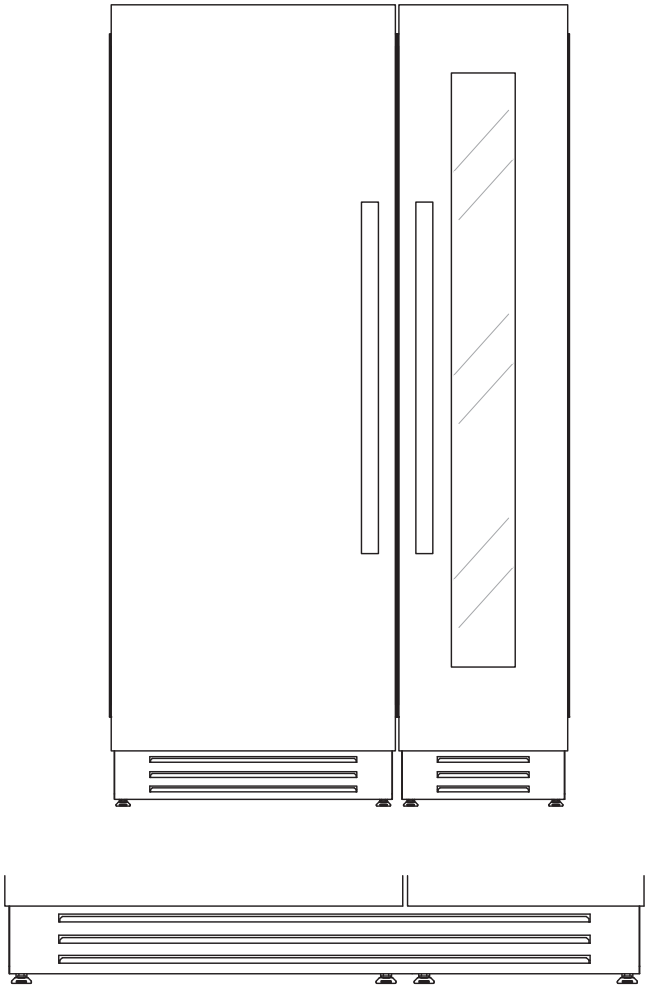

Part number 901561

Installation of multiple column units with a continuous cabinet toe kick are possible. Details are provided in the Bertazzoni Columns installation manual.


BUILT-IN BOTTOM MOUNT REFRIGERATORS

These refrigerators from the T tier are masterpieces of design, styled to reflect Bertazzoni's meticulous attention to detail. They are practical, too - incorporating the latest technology to retain the nutritional value, vitamins, minerals, and texture of your food for longer. Designed for true flush installation in a standard depth cabinet, they are available in both stainless steel and panel-ready models for a seamless installation with any adjacent cabinetry and can be installed side-by-side, doubling your refrigerator space.


Add the finishing touch with Professional, Master, or Heritage Series handles to match the other appliances in your kitchen.

The side-by-side installation kit lets you create clean lines in your kitchen. "Lift and swing" hinges are available on 90 cm (36") and 75 cm (30") models to allow a minimal vertical gap of 3 mm (1/8") between adjacent front cabinet panels.

90 cm (36")
Panel Installed and
Panel Ready



75 cm (30")
Panel Installed and
Panel Ready






90 cm (36”) Bottom Mount Panel Installed
Dimensions


REF905BBLXTT/24 left hinge
REF905BBRXTT/24 right hinge

Handle choices
Professional Series: PROHK36PI
Master series: MASHK36PI
Heritage Series: HERHK36PI


SIDE VIEW

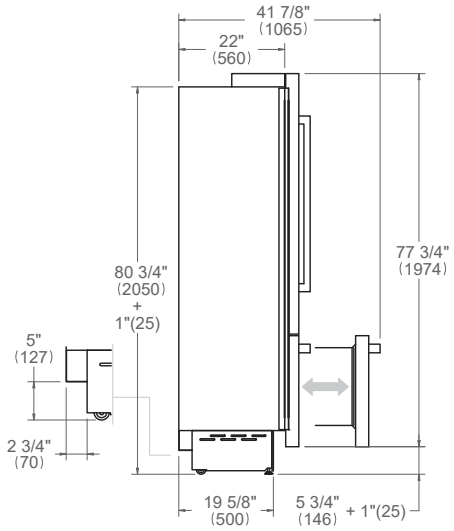


FRONT VIEW

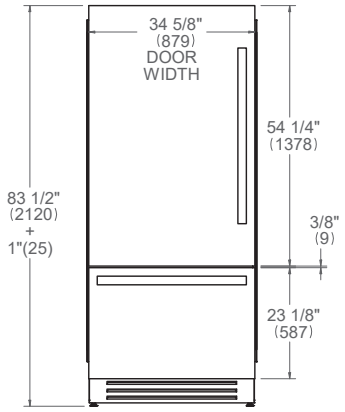


TOP VIEW

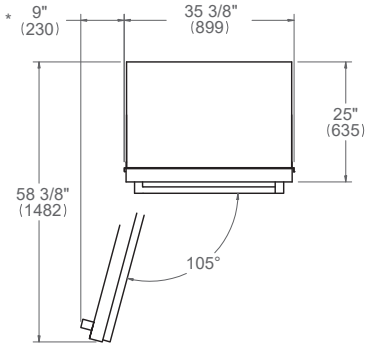


SIDE VIEW

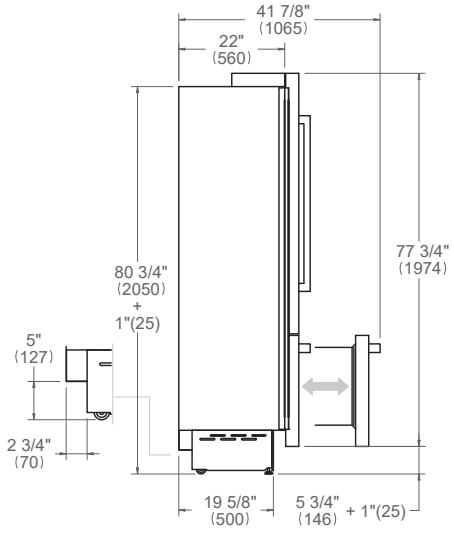

FRONT VIEW

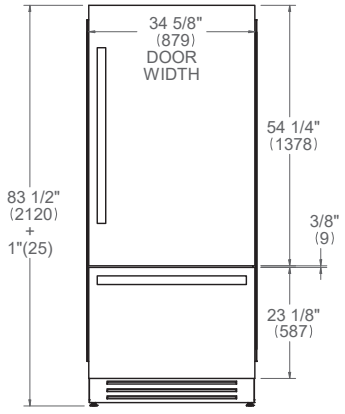

TOP VIEW

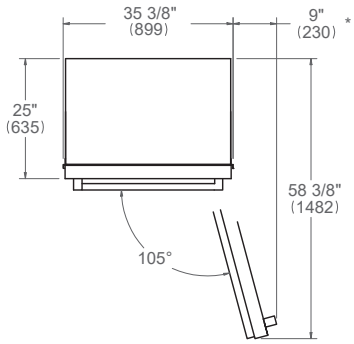

* Maximum Overall Handle Dimension
For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

90 cm (36”) Bottom Mount Panel Installed
Installation requirements

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	695 kg (1532 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 1,5 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2,5 m power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be from 0.5 bar to 5 bar (between 8 PSI and 75 PSI). Different pressures can cause malfunctions or leaks in the water system.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


90 cm (36”) Bottom Mount Panel Installed

Flush installation


TOP VIEW [b]



SIDE VIEW

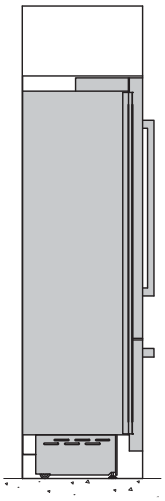

FRONT VIEW

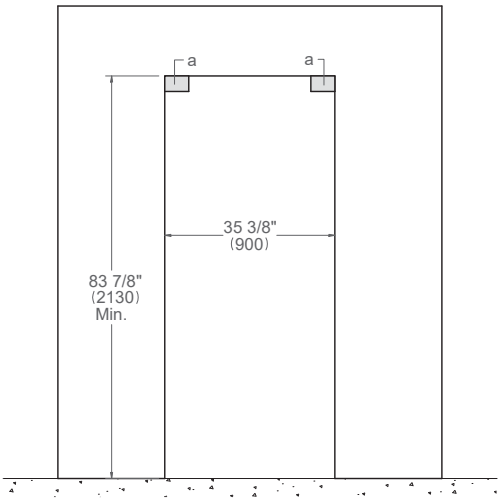

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

90 cm (36”) Bottom Mount Panel Ready
Dimensions


REF905BBLPTT/24 left hinge
REF905BBRPTT/24 right hinge

Handle choices
Professional Series: PROHK36PI
Master series: MASHK36PI
Heritage Series: HERHK36PI


SIDE VIEW

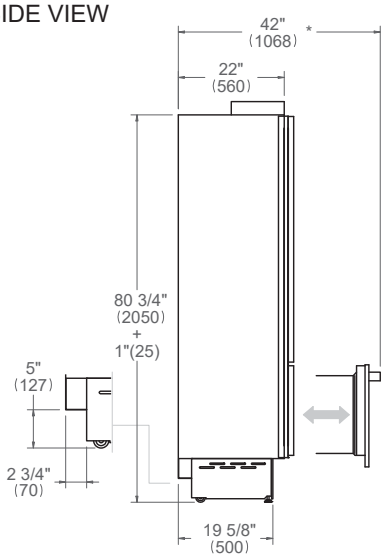


FRONT VIEW

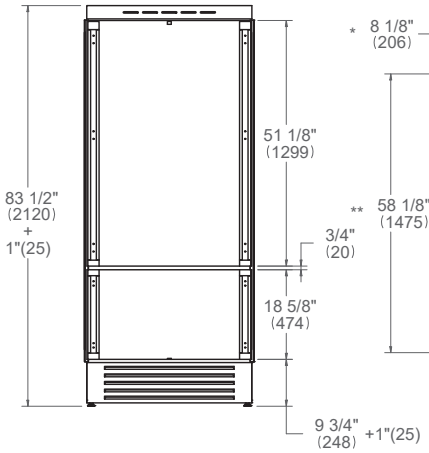


TOP VIEW

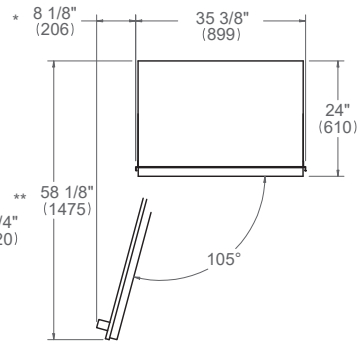


SIDE VIEW

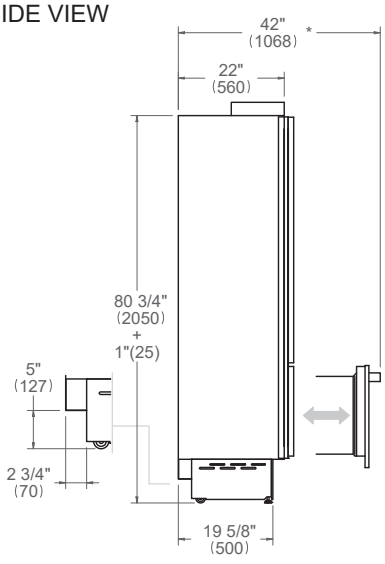

FRONT VIEW

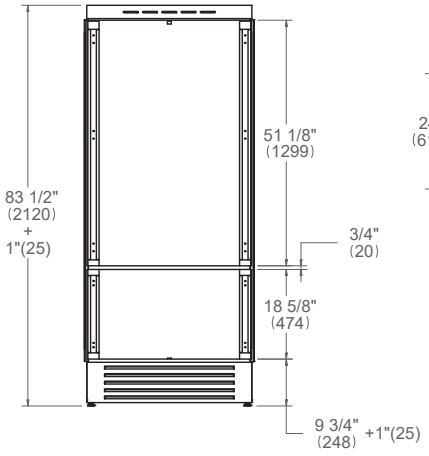

TOP VIEW

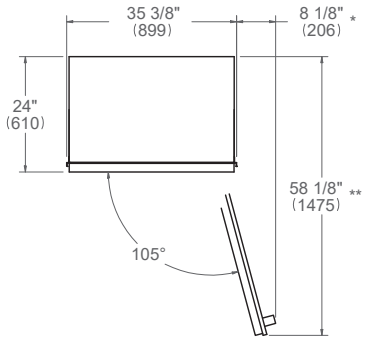

* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 99
For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

90 cm (36”) Bottom Mount Panel Ready
Installation requirements

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	695 kg (1532 lb)

For panel ready bottom mount, do not exceed the maximum weight of 23 kg (51 pounds) for door panel and 11 kg (25 pounds) for drawer panel.
Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 1,5 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2,5 m power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be from 0.5 bar to 5 bar (between 8 PSI and 75 PSI). Different pressures can cause malfunctions or leaks in the water system.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


90 cm (36”) Bottom Mount Panel Ready

Flush installation


TOP VIEW [b]



SIDE VIEW

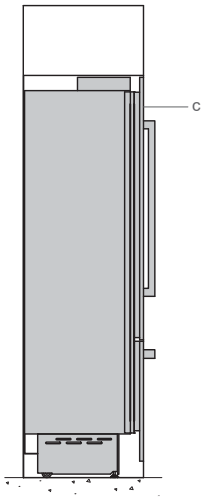

FRONT VIEW

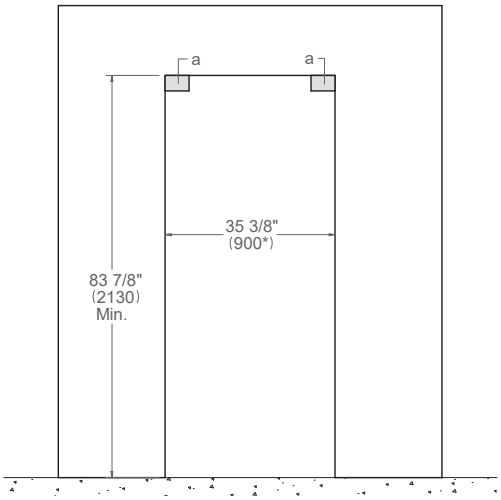

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.
* 903 mm (35 9/16”) for framed-in installation.

75 cm (30”) Bottom Mount Panel Installed
Dimensions


REF755BBLXTT/24 left hinge
REF755BBRXTT/24 right hinge

Handle choices
Professional Series: PROHK30PI
Master series: MASHK30PI
Heritage Series: HERHK30PI


SIDE VIEW

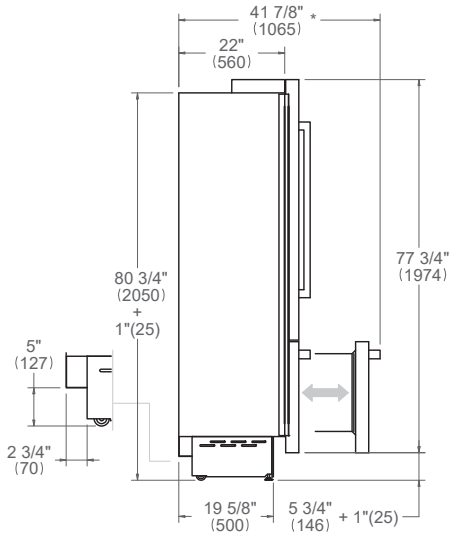


FRONT VIEW

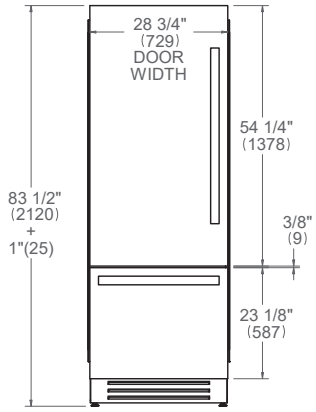


TOP VIEW




SIDE VIEW

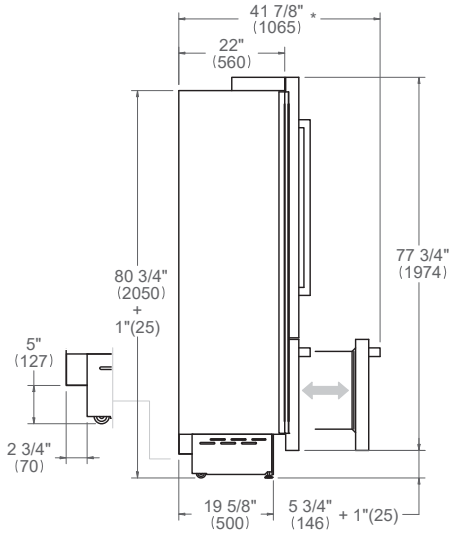

FRONT VIEW

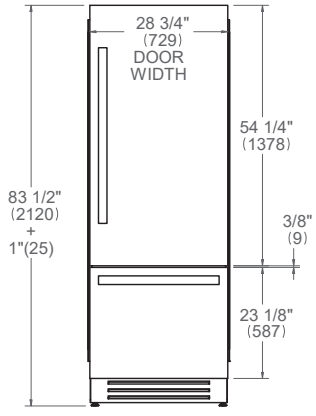

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Bottom Mount Panel Installed
Installation requirements

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 250 W 1,4 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2,5 m power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be from 0.5 bar to 5 bar (between 8 PSI and 75 PSI). Different pressures can cause malfunctions or leaks in the water system.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


75 cm (30”) Bottom Mount Panel Installed

Flush installation


TOP VIEW [b]



SIDE VIEW

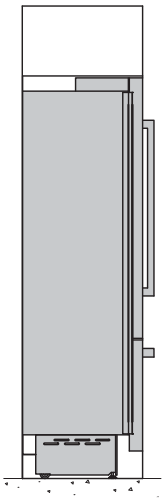

FRONT VIEW

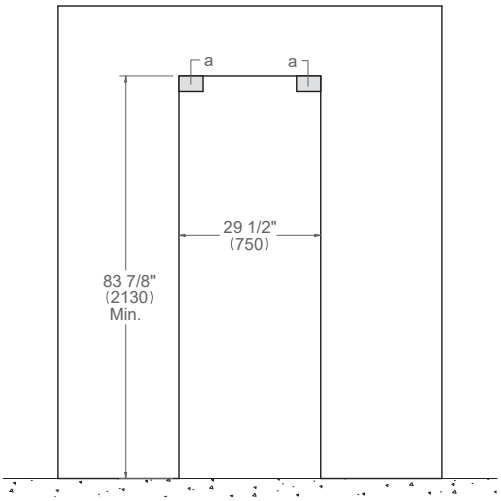

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

75 cm (30”) Bottom Mount Panel Ready
Dimensions


REF755BBLPTT/24 left hinge
REF755BBRPTT/24 right hinge

Handle choices
Professional Series: PROHK30PI
Master series: MASHK30PI
Heritage Series: HERHK30PI


SIDE VIEW

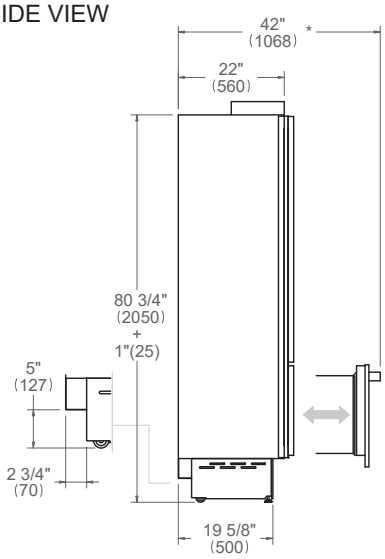


FRONT VIEW

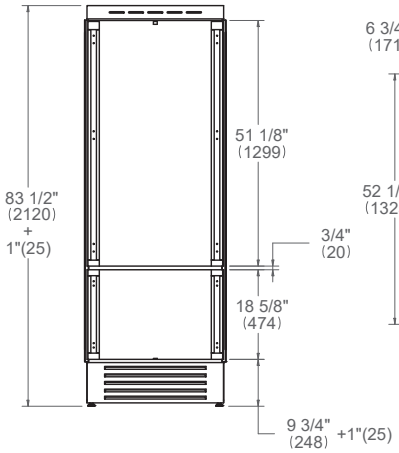


TOP VIEW




SIDE VIEW

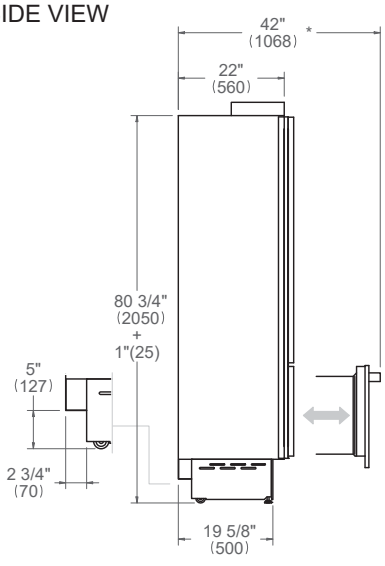

FRONT VIEW

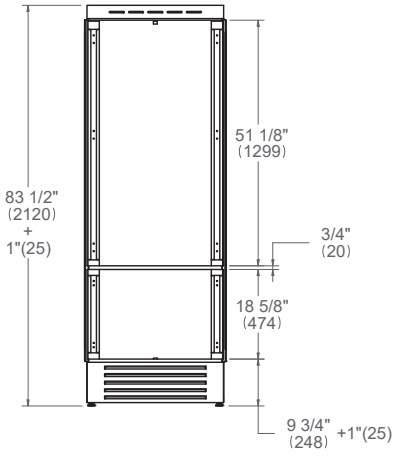

TOP VIEW



* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 99
For detailed handle dimensions see page 100

Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Bottom Mount Panel Ready
Installation requirements

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	570 kg (1257 lb)

For panel ready bottom mount, do not exceed the maximum weight of 23 kg (51 pounds) for door panel and 11 kg (25 pounds) for drawer panel.
Panel can have thickness ranging between 19 mm (¾”) and 28 mm (1 1/8”).

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 250 W 1,4 A
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2,5 m power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be from 0.5 bar to 5 bar (between 8 PSI and 75 PSI). Different pressures can cause malfunctions or leaks in the water system.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


75 cm (30”) Bottom Mount Panel Ready

Flush installation


TOP VIEW [b]



SIDE VIEW

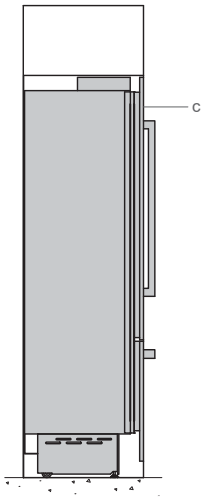

FRONT VIEW

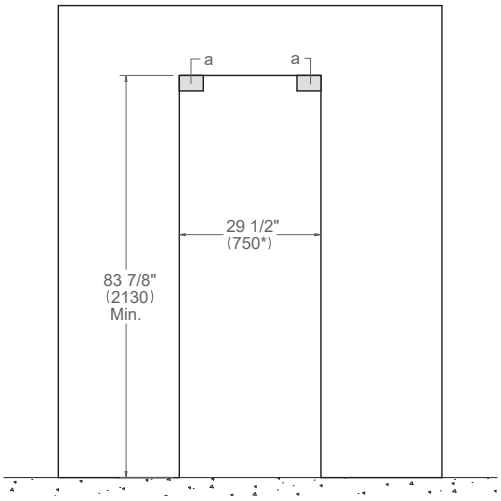

(a) Area to be left clear for the anti-tipping brackets – 140x100 mm (5 1/2” x 4”)
(c) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.
* 753 mm (29 5/8”) for framed-in installation.

BOTTOM MOUNT
MULTIPLE INSTALLATIONS



Bottom Mount Multiple Installations


Installation requirements

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

For panel ready bottom mount, do not exceed the maximum weight of 23 kg (51 pounds) for door panel and 11 kg (25 pounds) for drawer panel.
Panel can have thickness ranging between 19 mm (¾") and 28 mm (1 1/8").

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only these appliances is recommended.

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼") waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾") diameter but is metric threaded (NPT).
The system pressure must be between 0.5 bar and 5 bar (from 8 PSI to 75 PSI). Different pressures can cause malfunctions or leaks in the water system.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


150 cm (60”) Bottom Mount Double Configurations

Flush installation

POSSIBLE COMBINATIONS


REF755BBRXTT/24
REF755BBLXTT/24

REF755BBRPTT/24
REF755BBLPTT/24




REF755BBRXTT/24
REF755BBRXTT/24

REF755BBRPTT/24
REF755BBRPTT/24



REF755BBLXTT/24
REF755BBLXTT/24


REF755BBLPTT/24
REF755BBLPTT/24



TOP VIEW [b]



FRONT VIEW

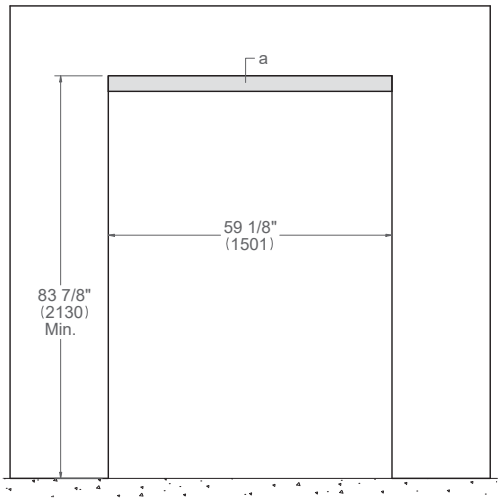

a Area to be left clear for the anti-tipping brackets – 1524x100 mm (60”x4”)

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.

165 cm (66") Bottom Mount Double Configurations

Flush installation


POSSIBLE COMBINATIONS

REF755BBRXTT/24
REF755BBLXTT/24

REF755BBLXTT/24
REF905BBRXTT/24


REF755BBRPTT/24
REF905BBLPTT/24

REF755BBLPTT/24
REF905BBRPTT/24




REF755BBRXTT/24
REF905BBRXTT/24

REF755BBRPTT/24
REF905BBRPTT/24



REF755BBRXTT/24
REF905BBRXTT/24


REF755BBRPTT/24
REF905BBRPTT/24



TOP VIEW [b]



FRONT VIEW

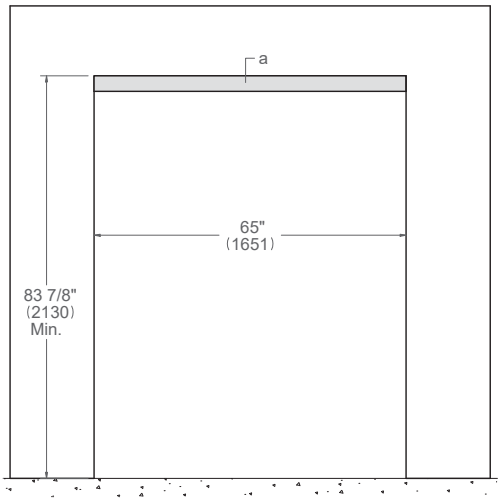

a Area to be left clear for the anti-tipping brackets – 1676x100 mm (66"x4")

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.


180 cm (72”) Bottom Mount Double Configurations

Flush installation

POSSIBLE COMBINATIONS


REF905BBRXTT/24
REF905BBLXTT/24

REF905BBRPTT/24
REF905BBLPTT/24




REF905BBRXTT/24
REF905BBRXTT/24

REF905BBRPTT/24
REF905BBRPTT/24



REF905BBLXTT/24
REF905BBLXTT/24


REF905BBLPTT/24
REF905BBLPTT/24



TOP VIEW [b]



FRONT VIEW

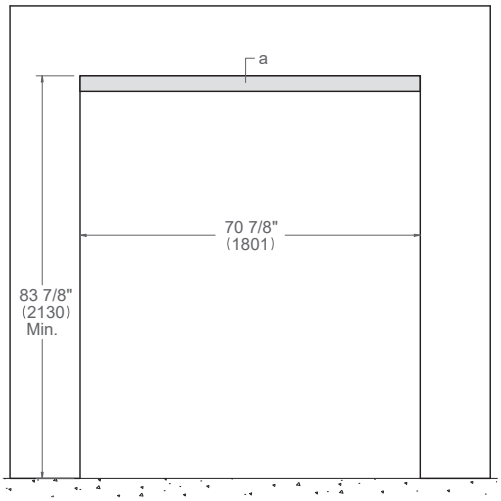

a Area to be left clear for the anti-tipping brackets – 1829x100 mm (72”x4”)

b Depth includes kitchen cabinet front panel


Dimensions in parentheses are millimeters unless otherwise specified.

120 cm (48") Double Configurations*


Flush installation

POSSIBLE COMBINATIONS [c]

REF755BBRPTT/24
WC455BLP2T/24




REF755BBLPTT/24
WC455BRP2T/24



TOP VIEW [b]



FRONT VIEW

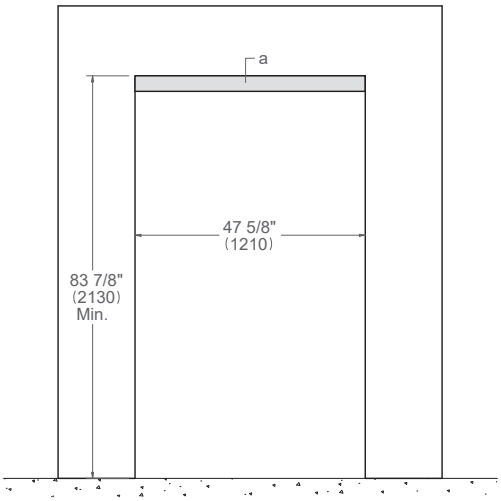

a: Area to be left clear for the anti-tipping brackets – 1219x100 mm (48"x4")

b: Depth includes kitchen cabinet front panel.

c: Optional 120 cm (48 inch) bridge toe kick accessory is available. For details see page 75

Dimensions in parentheses are millimeters unless otherwise specified.

* The combination of bottom mount and wine column is only available for panel ready models.


All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.

135 cm (54") Double Configurations*


Flush installation

POSSIBLE COMBINATIONS


REF755BBRPTT/24
WC605BLP2T/24




REF755BBLPTT/24
WC605BRP2T/24



REF905BBRPTT/24
WC455BLP2T/24




REF905BBLPTT/24
WC455BRP2T/24



TOP VIEW [b]



FRONT VIEW

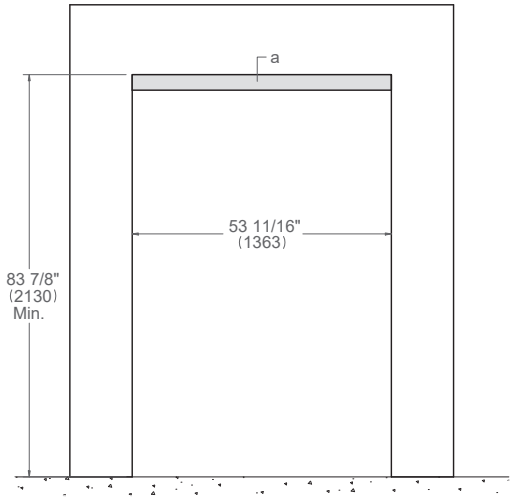

a Area to be left clear for the anti-tipping brackets – 1372x100 mm (54"x4")

b Depth includes kitchen cabinet front panel

Dimensions in parentheses are millimeters unless otherwise specified.

* The combination of bottom mount and wine column is only available for panel ready models.


All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.

150 cm (60") Double Configurations*


Flush installation

POSSIBLE COMBINATIONS

REF905BBRPTT/24
WC605BLP2T/24




REF905BBLPTT/24
WC605BRP2T/24



TOP VIEW [b]



FRONT VIEW

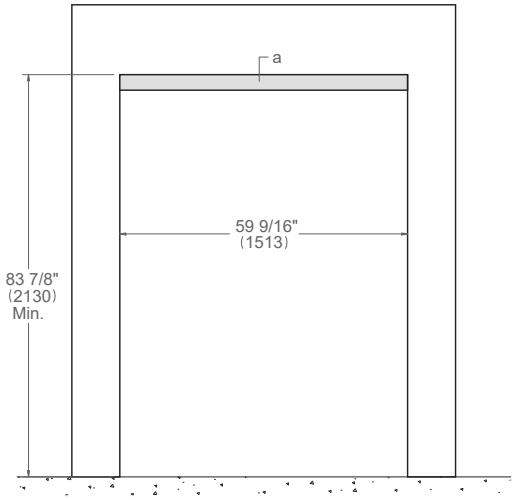

a: Area to be left clear for the anti-tipping brackets – 1524x100 mm (60"x4")

b: Depth includes kitchen cabinet front panel.


Dimensions in parentheses are millimeters unless otherwise specified.

* The combination of bottom mount and wine column is only available for panel ready models.

All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.

Custom Door Panel


REAR PANEL DRILLING

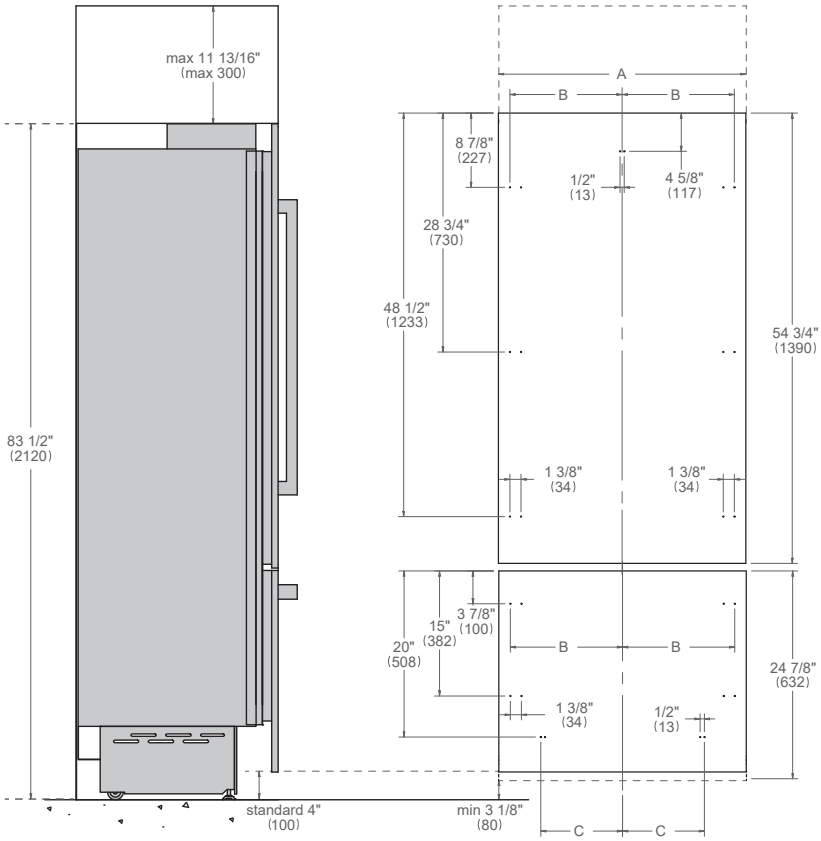

DOOR PANEL

DRAWER PANEL

CUSTOM HANDLES MOUNTING AREA

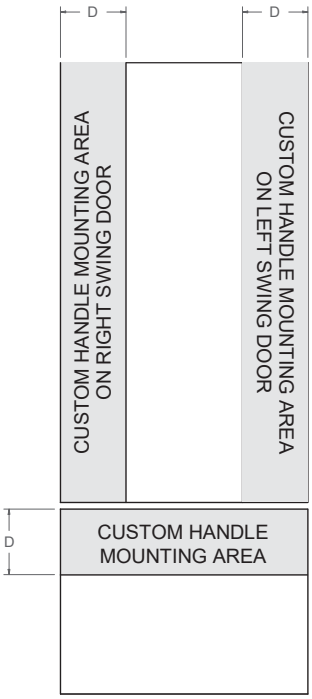


	90 cm (36”)	75 cm (30”)
A	897 mm (35 1/4”)	747 mm (29 3/8”)
B	418 mm (16 1/2”)	343 mm (13 1/2”)
C	354.5 mm (14”)	279.5 mm (11”)
D	182 mm (7 1/8”)	152 mm (6”)


Dimensions in parentheses are millimeters unless otherwise specified.
Minimum gap between custom door panels and adjacent cabinetry is 3 mm (1/8”).

Refrigeration Handles


PROFESSIONAL SERIES
PROHK36PI
PROHK30PI




MASTER SERIES
MASHK36PI
MASHK30PI




HERITAGE SERIES
HERHK36PI
HERHK30PI



BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR

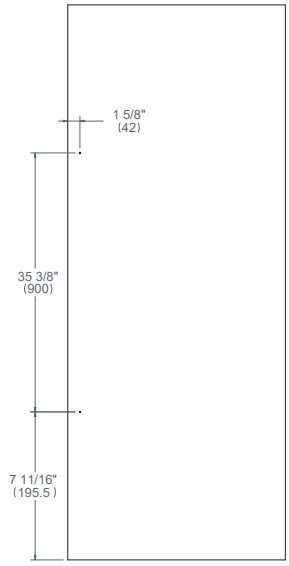

BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR

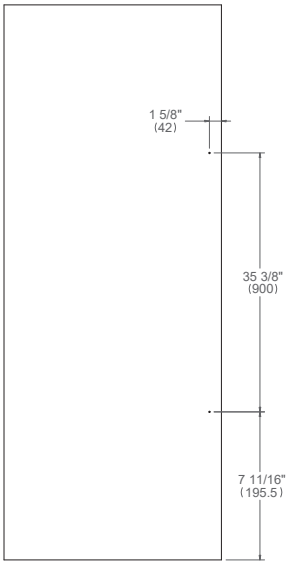

HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles,it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel.
Recommended drill bit size to drill the pilot hole is 9,5 mm (3/8”).

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.


V TIER LINE UP

BUILT-IN REFRIGERATOR COLUMNS

BUILT-IN COLUMNS

Experience the ultimate design and technology with Bertazzoni's V tier refrigerators and freezer columns. These masterpieces of style boast high-quality materials and attention to detail in all respects.
The reversible panel-ready doors(*) are mounted on cutting-edge Hettich hinges, providing a seamless and weightless range of motion. With versatile installation options, you can create elegant configurations of the refrigerator and freezer columns.
You can also customize your columns with optional stainless panels, handles, and finishes, available for every Series.

75 cm (30")
Panel Ready




(*) Exept 45 cm (18") models.




75 cm (30”) Refrigerator Column Panel Ready
Dimensions

RLD75S5FPNS reversible hinges


SIDE VIEW

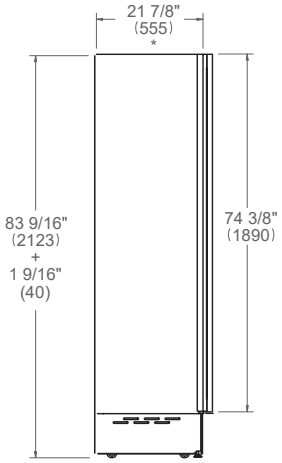


FRONT VIEW

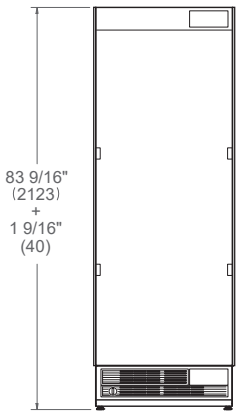


TOP VIEW

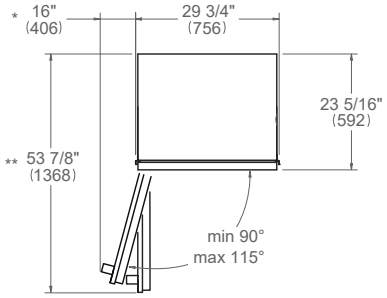


SIDE VIEW

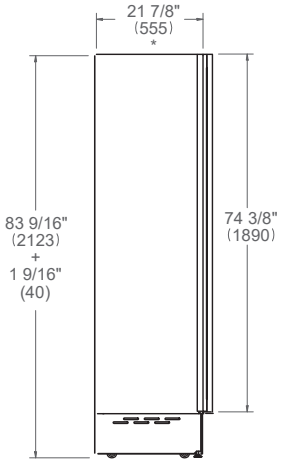

FRONT VIEW

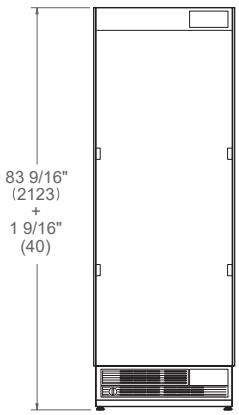

TOP VIEW

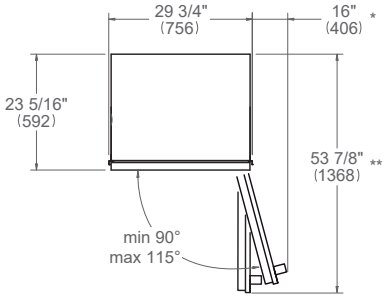

* Depth without door
** Maximum Overall Handle Dimension, 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 116
For detailed handle dimensions see page 118

Dimensions in parentheses are millimeters unless otherwise specified.
A matching stainless steel panel kit is available – SKU # SP30CX.

75 cm (30”) Refrigerator Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout. Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 30 kg (66 pounds) for door panel. Panels can have a thickness ranging between 19 mm (3/4”) and 18 mm (1 1/2”). For a flush installation in 635 mm (25”) deep cabinets, custom door panels should not be thicker than 24 mm (15/16”).

For instructions of product combinations please see the Multiple Installation Section (page 112).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	544 kg (1200 lb)


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 112 W 2 A
Service	15 Amp dedicated circuit
Power Connection	SHUCKO with 2,3 m power cord power cord

PLUMBING REQUIREMENT


Bertazzoni Refrigerator Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with water dispenser), use a 6,4 mm (¼”) waterline with accessible shut-off valve.
The system pressure must be between from 1.7 to 5.5 bar (between 25 and 80 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see the product spec sheet.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Refrigerator Column Panel Ready
Flush installation


TOP VIEW [b]



SIDE VIEW

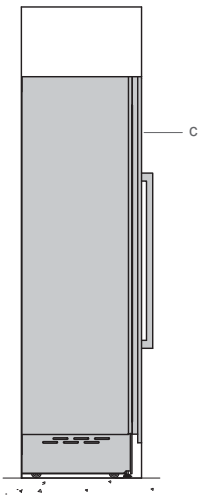

FRONT VIEW

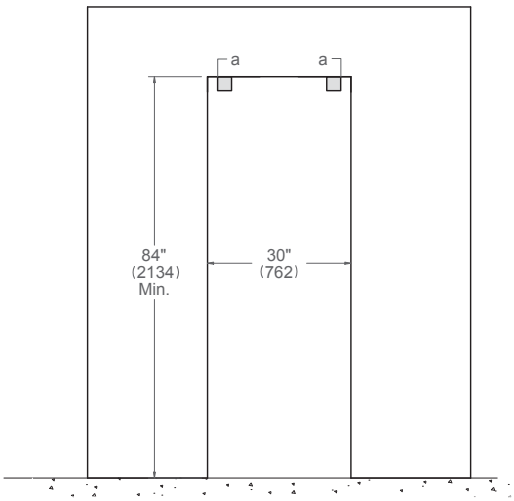


(a) Anti-tipping brackets included with appliance – 101x5 mm (4”x3/16”)
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

BUILT-IN FREEZER COLUMNS

45 cm (18”)
Panel Ready







45 cm (18”) Freezer Column Panel Ready
Dimensions

RFZ45S5FPLS left hinge
RFZ45S5FPRS right hinge


SIDE VIEW

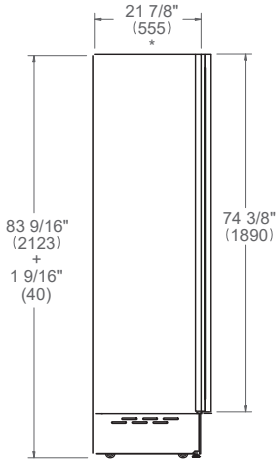


FRONT VIEW

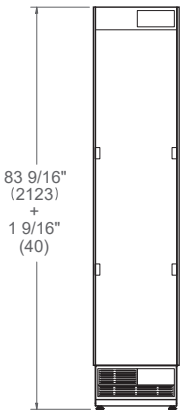


TOP VIEW




SIDE VIEW

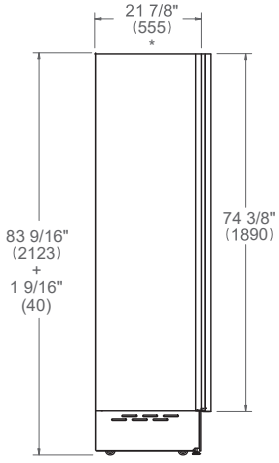

FRONT VIEW

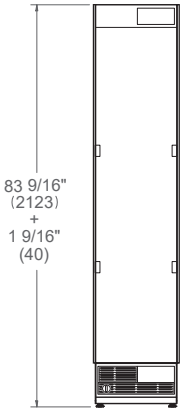

TOP VIEW



* Depth without door
** Maximum Overall Handle Dimension, 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 116
For detailed handle dimensions see page 118

Dimensions in parentheses are millimeters unless otherwise specified.
A matching stainless steel panel kit is available – SKU # SP18CX.

45 cm (18”) Freezer Column Panel Ready
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout. Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 30 kg (66 pounds) for door panel. Panels can have a thickness ranging between 19 mm (3/4”) and 38 mm (1 1/2”). For a flush installation in 635 mm (25”) deep cabinets, custom door panels should not be thicker than 24 mm (15/16”).

For instructions of product combinations please see the Multiple Installation Section (page 112).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	544 kg (1200 lb)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 160 W 2 A
Service	15 Amp dedicated circuit
Power Connection	SHUCKO with 2,3 m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with water dispenser), use a 6,4 mm (¼”) waterline with accessible shut-off valve.
The system pressure must be between from 1.7 bar to 5.5 bar (between 25 and 80 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see the product spec sheet.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


45 cm (18”) Freezer Column Panel Ready

Flush installation


TOP VIEW [b]



SIDE VIEW

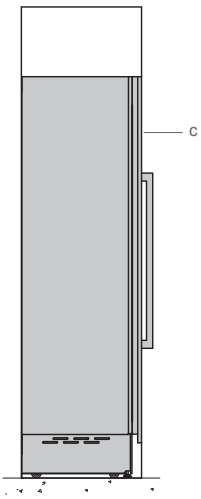

FRONT VIEW

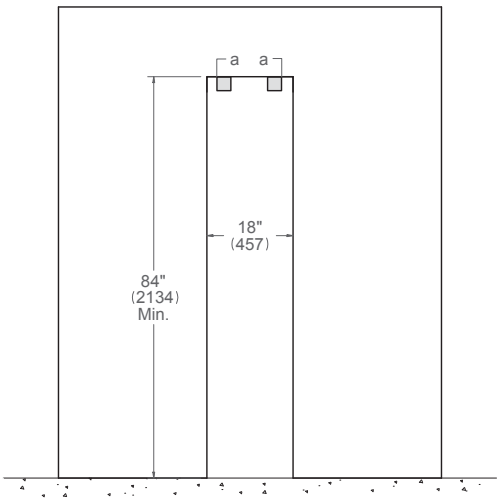

(a) Anti-tipping brackets included with appliance – 101x5 mm (4”x3/16”)
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

COLUMNS MULTIPLE INSTALLATIONS



Multiple installations
Installation requirements

INSTALLATION

All Bertazzoni columns can be installed in a standard 635 mm (25”) depth cutout. Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliances and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 30 kg (66 pounds) for door panel. Panels can have a thickness ranging between 19 mm (3/4”) and 38 mm (1 1/2”). For a flush installation in 635 mm (25”) deep cabinets, custom door panels should not be thicker than 24 m (15/16”).

For instructions of product combinations please see the Multiple Installation Section (page 112).


CABINET REQUIREMENT

Installation of the appliances must be performed in accordance with the provisions of applicable legislation.
Be sure that support of these appliances is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of all the appliances when in use. Please see any single product installation manual for required floor support.

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate 15 Amp circuit breaker servicing only these appliances is recommended.

PLUMBING REQUIREMENTS

Bertazzoni Refrigerator and Freezer Columns are provided with a water filter assembly which must be mounted on the bottom part of the unit.
The appliances must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with water dispenser), use a 6,4 mm (¼”) waterline with accessible shut-off valve.
The system pressure must be between from 1.7 bar to 5.5 bar (between 25 and 80 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see the product spec sheet.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

120 cm (48”) Double Configurations

Flush installation

POSSIBLE COMBINATIONS


RLD75S5FPNS
RFZ45S5FP(L/R)S



TOP VIEW [b]



FRONT VIEW

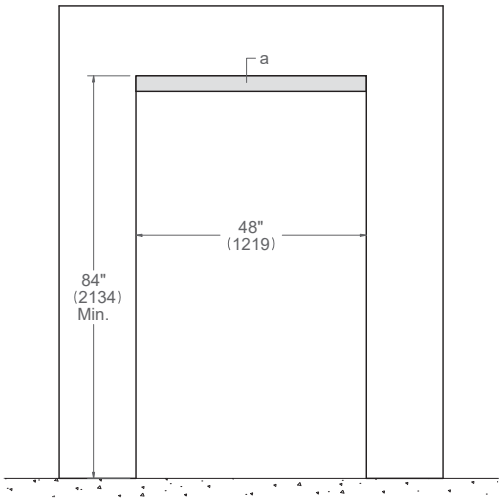

a: Anti-tipping brackets included with appliance – 1200x4.8 mm (48”x3/16”)
b: Depth includes kitchen cabinet front panel


Dimensions in parentheses are millimeters unless otherwise specified.
All Freezer Columns are supplied with a vertical connector trim for multiple columns installations.
No additional accessories are needed.

Custom Door Panel

REFRIGERATOR COLUMNS REAR PANEL DRILLING

FREEZER COLUMNS REAR PANEL DRILLING

CUSTOM HANDLES MOUNTING AREA

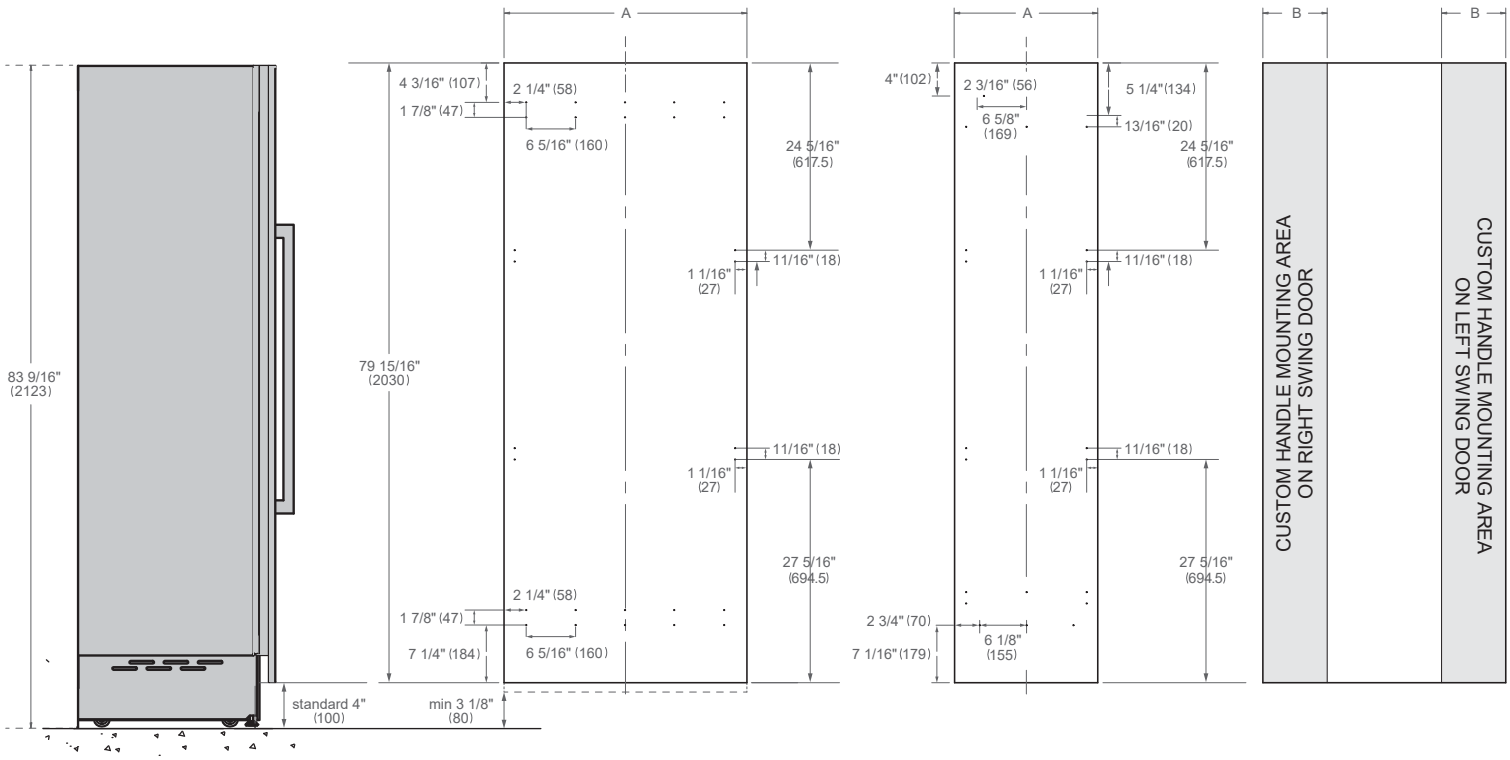


	75 cm (30”)	45 cm (18”)
A	756 mm (29 3/4”)	451 mm (17 3/4”)
B	152 mm (6”)	92 mm (3 5/8”)


Dimensions in parentheses are millimeters unless otherwise specified.
Minimum gap between custom door panels and adjacent cabinetry is 3 mm (1/8”).

Recommended Installations

RECOMMENDED INSTALLATIONS

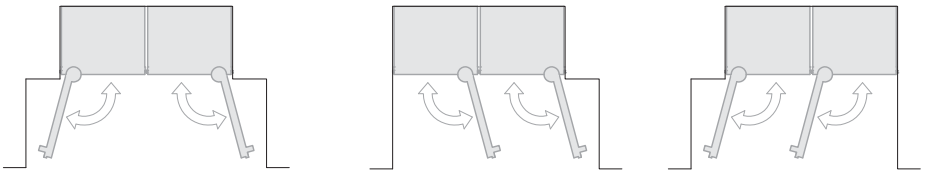


NOT RECOMMENDED INSTALLATIONS

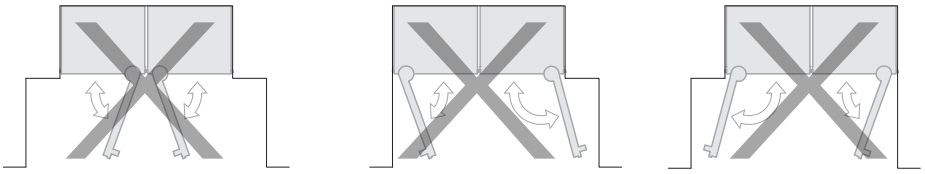


Refrigeration Handles


PROFESSIONAL SERIES
PROHKCOL




MASTER SERIES
MASHKCOL




HERITAGE SERIES
HERHKCOL



BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR

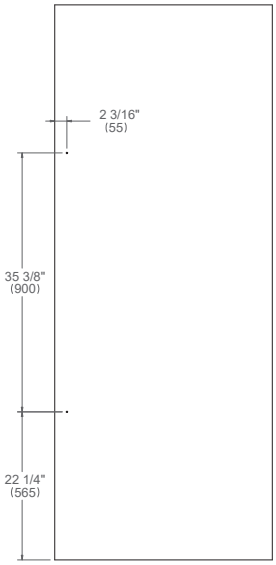

BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR

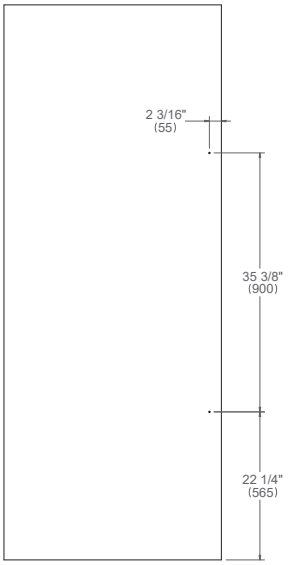

HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles,it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel.
Recommended drill bit size to drill the pilot hole is 9,5 mm (3/8”).


Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.


BUILT-IN BOTTOM MOUNT AND FRENCH DOOR REFRIGERATORS

Experience the perfect combination of design and technology with Bertazzoni's Premium tier refrigerators. These masterpieces of style reflect our meticulous attention to detail and are designed to retain your food's nutritional value, vitamins, minerals, and texture for longer.
With a true flush installation in a standard depth cabinet and reversible panel-ready doors, they seamlessly integrate with any adjacent cabinetry. You can even install them side-by-side with CTXV connection kit, doubling your refrigerator space.
Customize your refrigerators with optional stainless panels and Professional, Master, or Heritage Series handles to match your other kitchen appliances.
Our 90 cm (36") and 75 cm (30") bottom-mount models and 90 cm (36") French door refrigerator feature Hettich hinges that allow a minimal vertical gap of 3 mm (1/8") between adjacent front cabinet panels, creating clean lines in your kitchen.


90 cm (36")
French Door



90 cm (36")
Panel Ready



75 cm (30")
Panel Ready






90 cm (36”) French Door Bottom Mount Panel Ready
Dimensions


RFD90S5FPNS/24

Handle choices
Professional Series: HK36PROFDBXV
Master series: HK36MASFDBXV
Heritage Series: HK36HERFDBXV


SIDE VIEW

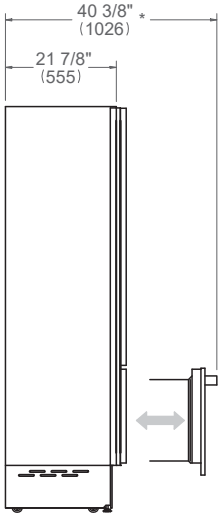

FRONT VIEW

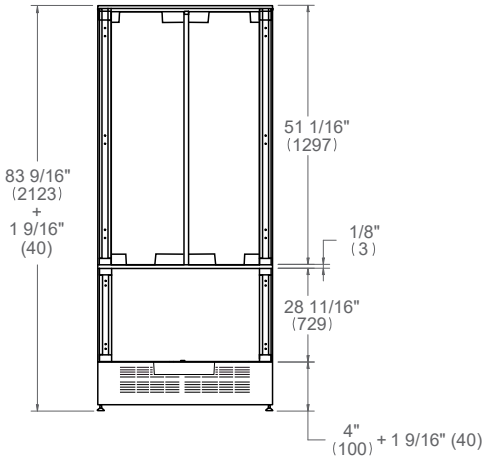

TOP VIEW

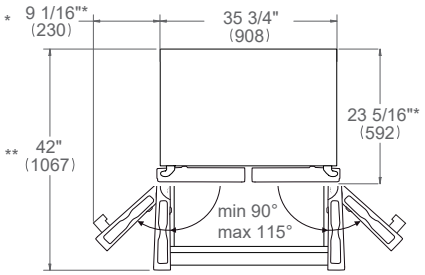

* Maximum Overall Handle Dimension
** 19 mm (3/4”) Door Panel thickness
For custom panel dimensions see page 136
For detailed handle dimensions see page 138

Dimensions in parentheses are millimeters unless otherwise specified.
A matching stainless steel panel kit is available - SKU # SP36FDX/24.

90 cm (36”) French Door Bottom Mount Panel Ready
Installation requirements

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	544 kg (1200 lb)

For panel ready french door refrigerator, do not exceed the maximum weight of 20 kg (44 pounds) for door panels and 9 kg (20 pounds) for drawer panel.
Panels can have a thickness of 19 mm (3/4”). For a flush installation in 635 mm (25”) deep cabinets, custom door panels should not be thicker than 19 mm (3/4”).

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 120 W 3 A
Service	15 Amp dedicated circuit
Power Connection	SHUCKO with 2,3 m power cord

PLUMBING REQUIREMENT


Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between from 1.7 to 5.5 bar (between 25 and 80 PSI). Different pressures can cause malfunctions or leaks in the water system.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

90 cm (36”) French Door Bottom Mount Panel Ready
Flush installation


TOP VIEW [b]



SIDE VIEW

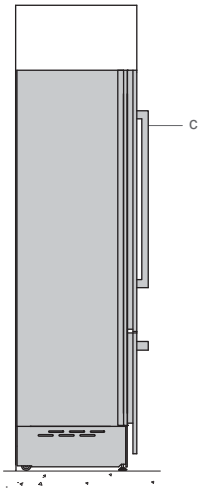

FRONT VIEW

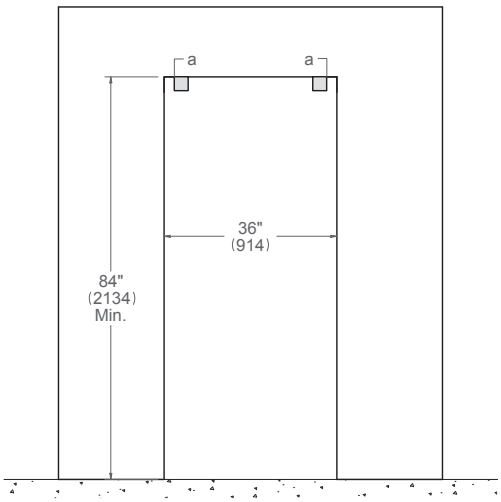

(a) Anti-tipping brackets included with appliance – 101x5 mm (4”x3/16”)
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

90 cm (36”) Bottom Mount Panel Ready
Dimensions


RBM90S5FPNS reversible hinge

Handle choices
Professional Series: PROHK36PI
Master series: MASHK36PI
Heritage Series: HERHK36PI


SIDE VIEW

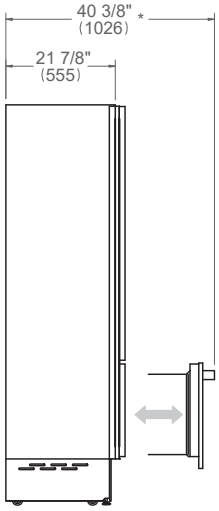


FRONT VIEW

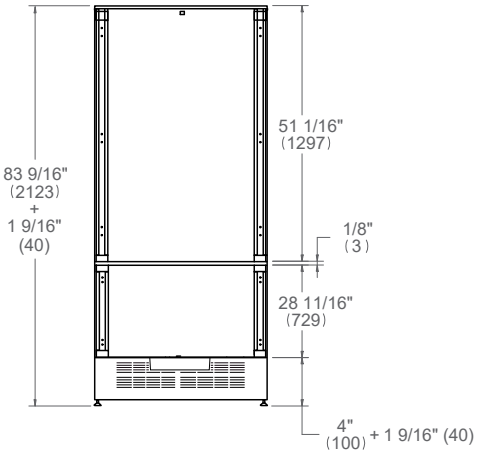


TOP VIEW

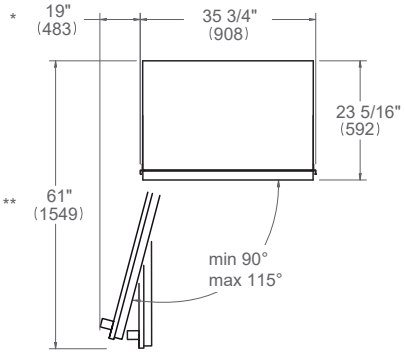


SIDE VIEW

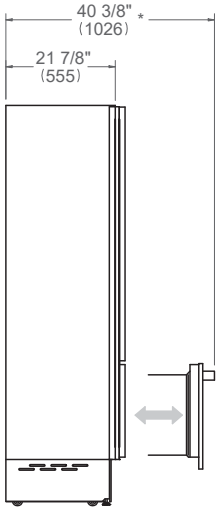

FRONT VIEW

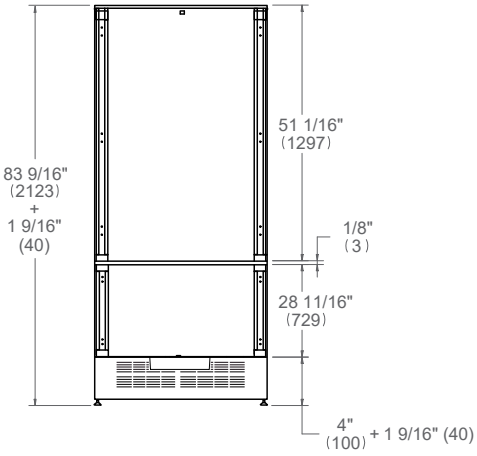

TOP VIEW

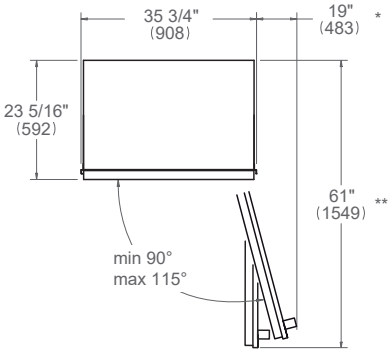

* Maximum Overall Handle Dimension
** 24 mm (15/16”) Door Panel thickness
For custom panel dimensions see page 137
For detailed handle dimensions see page 138

Dimensions in parentheses are millimeters unless otherwise specified.
A matching stainless steel panel kit is available - SKU # SP36BMX.

90 cm (36”) Bottom Mount Panel Ready
Installation requirements

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	544 kg (1200 lb)

For panel ready bottom mount refrigerator, do not exceed the maximum weight of 16 kg (35 pounds) for door panel and 9 kg (20 pounds) for drawer panel.
Panels can have a thickness ranging between 19 mm (3/4”) and 38 mm (1 1/2”). For a flush installation in 635 mm (25”) deep cabinets, custom door panels should not be thicker than 24 mm (15/16”).

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 120 W 3 A
Service	15 Amp dedicated circuit
Power Connection	SHUCKO with 2,3 m power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between from 1.7 to 5.5 bar (between 25 and 80 PSI). Different pressures can cause malfunctions or leaks in the water system.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


90 cm (36”) Bottom Mount Panel Ready

Flush installation


TOP VIEW [b]



SIDE VIEW

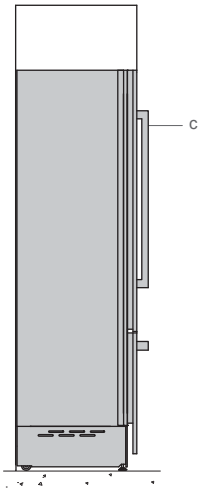

FRONT VIEW

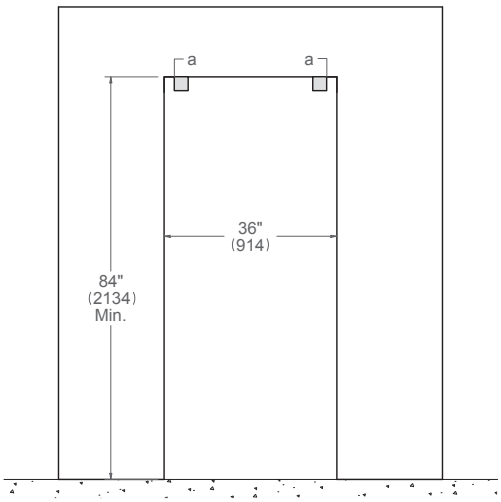

(a) Anti-tipping brackets included with appliance – 101x5 mm (4”x3/16”)
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.

75 cm (30”) Bottom Mount Panel Ready
Dimensions


RBM75S5FPNS reversible hinge

Handle choices
Professional Series: PROHK30PI
Master series: MASHK30PI
Heritage Series: HERHK30PI


SIDE VIEW

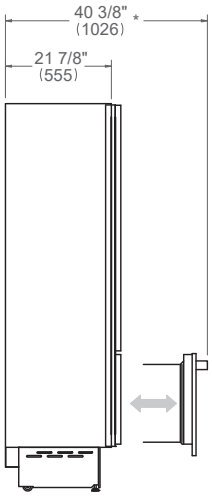


FRONT VIEW

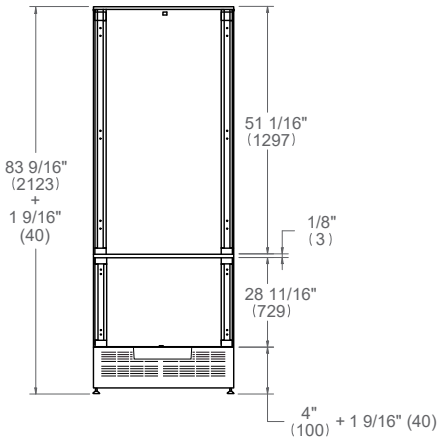


TOP VIEW

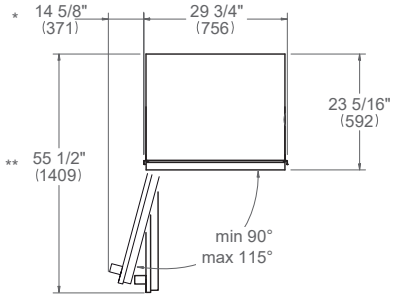


SIDE VIEW

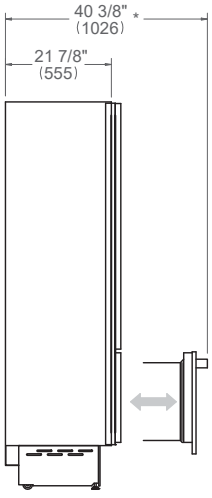

FRONT VIEW

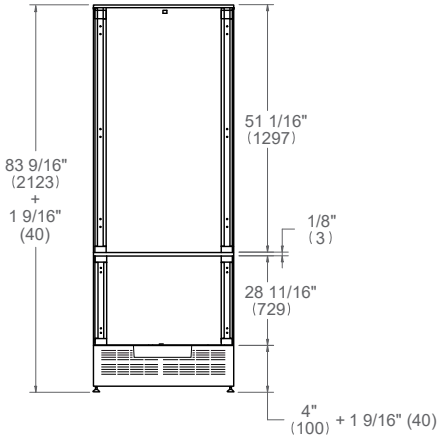

TOP VIEW

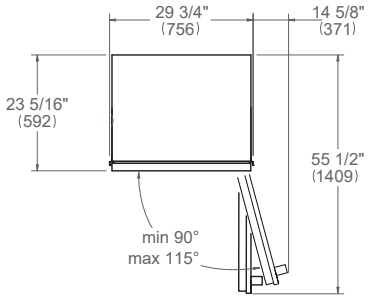

* Maximum Overall Handle Dimension
** 24 mm (15/16”) Door Panel thickness
For custom panel dimensions see page 137
For detailed handle dimensions see page 138

Dimensions in parentheses are millimeters unless otherwise specified.
A matching stainless steel panel kit is available - SKU # SP30BMX.

75 cm (30”) Bottom Mount Panel Ready
Installation requirements

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.


Required floor support	544 kg (1200 lb)

For panel ready combi bottom mount, do not exceed the maximum weight of 16 kg (35 pounds) for door panel and 9 kg (20 pounds) for drawer panel.
For a flush installation, cabinet panels should not be thicker than 24 mm (15/16”).


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 120 W 3 A
Service	15 Amp dedicated circuit
Power Connection	SHUCKO with 2,3 m power cord

PLUMBING REQUIREMENT

Bertazzoni Bottom Mount refrigerators are provided with a water filter assembly which must be mounted inside the unit.
The appliance must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with ice maker) a 6,4 mm (¼”) waterline with accessible shut-off valve must be supplied.
The solenoid connection on the appliance is 19 mm (¾”) diameter but is metric threaded (NPT).
The system pressure must be between from 1.7 to 5.5 bar (between 25 and 80 PSI). Different pressures can cause malfunctions or leaks in the water system.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


75 cm (30”) Bottom Mount Panel Ready

Flush installation


TOP VIEW [b]



SIDE VIEW

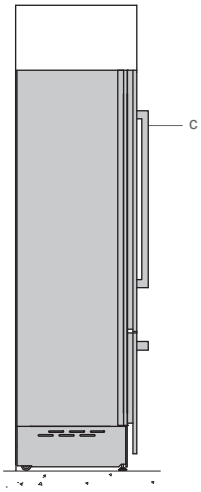

FRONT VIEW

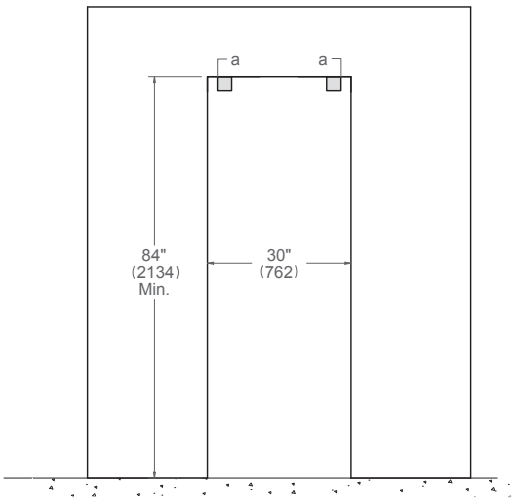

(a) Anti-tipping brackets included with appliance – 101x5 mm (4”x3/16”)
(c) Panel dimensions available on Door Panel Specs, Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

BOTTOM MOUNTS
MULTIPLE INSTALLATIONS


DUAL COOLING

Bottom Mount Multiple installations


Installation requirements

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

For panel ready bottom mount, do not exceed the maximum weight of 16/20 kg (35/44 pounds) for door panel/s and 9 kg (20 pounds) for drawer panel.
Panels can have a thickness ranging between 19 mm (3/4") and 38 mm (1 1/2"). For a flush installation in 635 mm (25") deep cabinets, custom door panels should not be thicker than 24 mm (15/16").

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only these appliances is recommended.

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally-mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

PLUMBING REQUIREMENT

The appliances must be connected only to a potable water supply system.
To connect to water supply system (for appliances equipped with water dispenser), use a 6,4 mm (¼") waterline with accessible shut-off valve.
The system pressure must be between from 1.7 bar to 5.5 bar (between 25 and 80 PSI). Different pressures can cause malfunctions or leaks in the water system.
For information on how to purchase the water filter, please see the product spec sheet.


For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.


150 cm (60") Bottom Mount Double Configurations
Flush installation

POSSIBLE COMBINATIONS

RBM75S5FPNS
RBM75S5FPNS








TOP VIEW [b]



FRONT VIEW

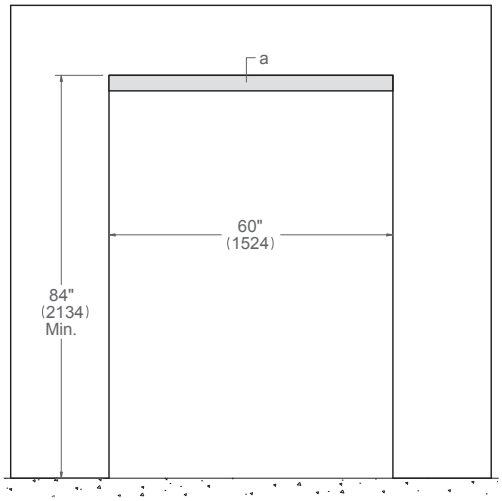


a Anti-tipping brackets included with appliance – 1500x5 mm (60"x3/16")
b Depth includes kitchen cabinet front panel


Dimensions in parentheses are millimeters unless otherwise specified.


165 cm (66”) Bottom Mount Double Configurations
Flush installation

POSSIBLE COMBINATIONS

RBM75S5FPNS
RBM90S5FPNS








TOP VIEW [b]



FRONT VIEW

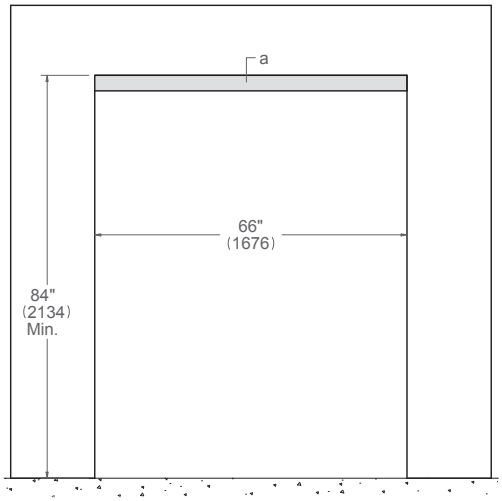

a Anti-tipping brackets included with appliance – 1650x5 mm (66”x3/16”)
b Depth includes kitchen cabinet front panel


Dimensions in parentheses are millimeters unless otherwise specified.


180 cm (72”) Bottom Mount Double Configurations


Flush installation

POSSIBLE COMBINATIONS

RBM90S5FPNS
RBM90S5FPNS








TOP VIEW [b]



FRONT VIEW

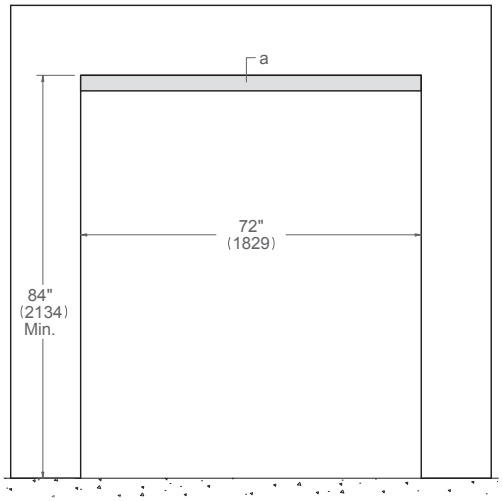


a Anti-tipping brackets included with appliance – 1800x5 mm (72”x3/16”)
b Depth includes kitchen cabinet front panel


Dimensions in parentheses are millimeters unless otherwise specified.

French Door Custom Door Panel

REAR PANEL DRILLING

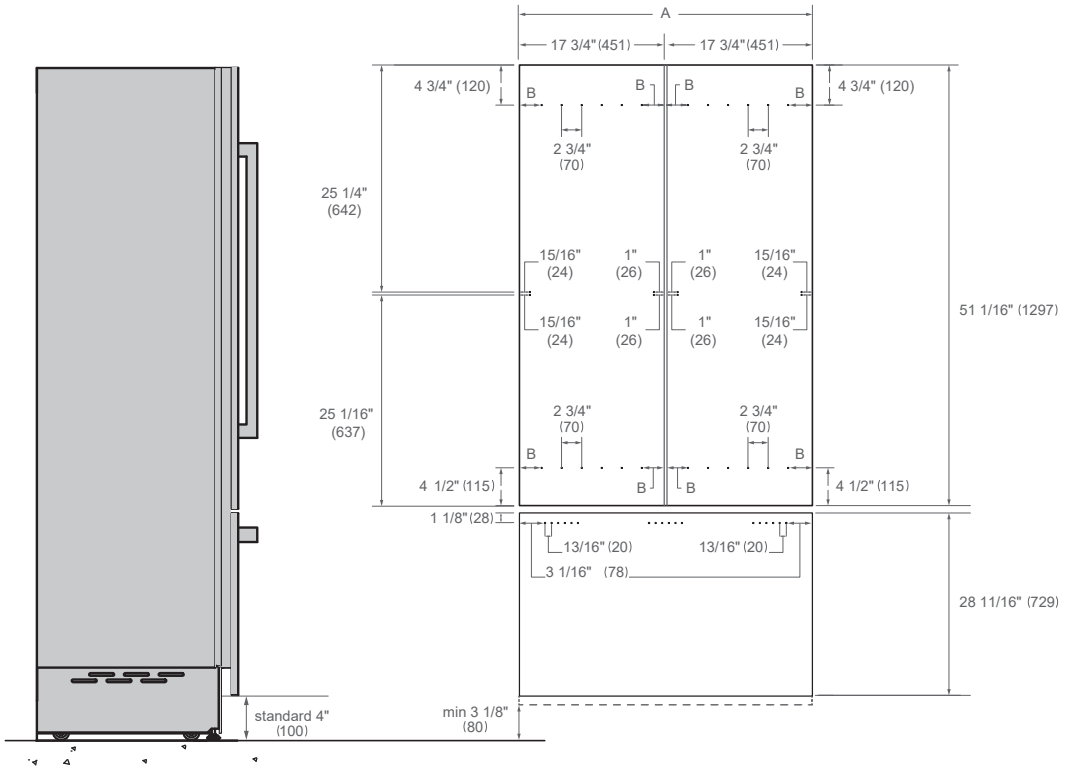

CUSTOM HANDLES MOUNTING AREA

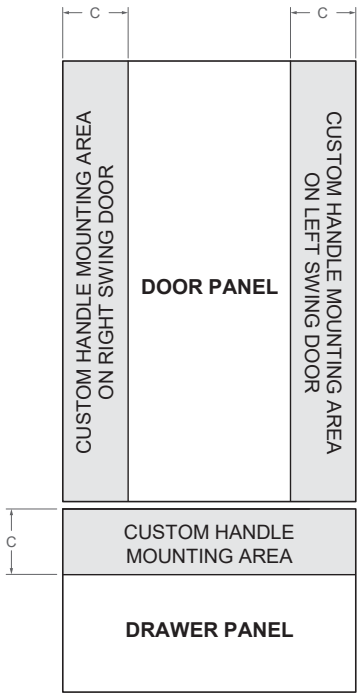



	90 cm (36”)
A	907 mm (35 11/16”)
B	52 mm (2 1/16”)
C	182 mm (7 1/8”)

Dimensions in parentheses are millimeters unless otherwise specified.
Minimum gap between custom door panels and adjacent cabinetry is 3.5 mm (1/8”).


Bottom Mount Custom Door Panel

90 CM (36”) & 75 CM (30”)
BOTTOM MOUNT
REAR PANEL DRILLING

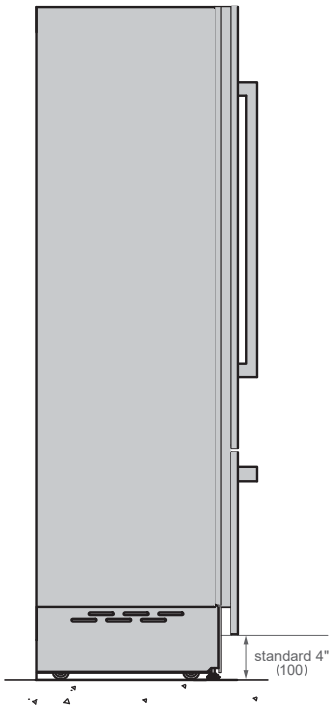

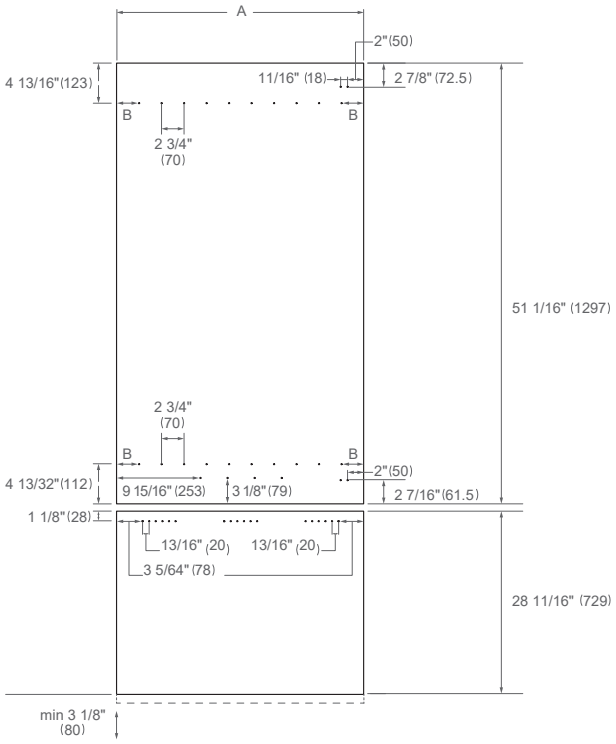

CUSTOM HANDLES
MOUNTING AREA

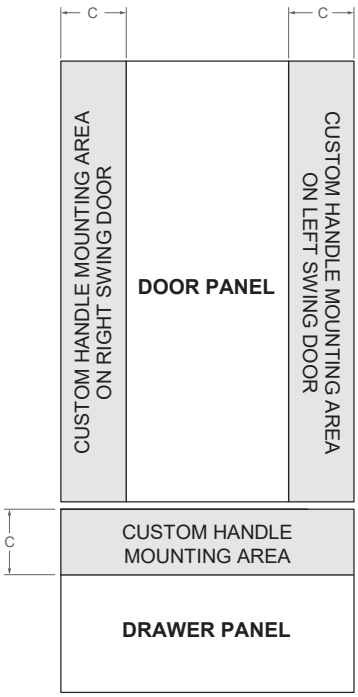


	90 cm (36”)	75 cm (30”)
A	908 mm (35 3/4”)	756 mm (29 3/4”)
B	139 mm (5 1/2”)	63 mm (2 1/2”)
C	182 mm (7 1/8”)	152 mm (6”)


Dimensions in parentheses are millimeters unless otherwise specified.
Minimum gap between custom door panels and adjacent cabinetry is 3 mm (1/8”).

French Door Refrigeration Handles


PROFESSIONAL SERIES
HK36PROFDBXV




MASTER SERIES
HK36MASFDBXV




HERITAGE SERIES
HK36HERFDBXV



BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR

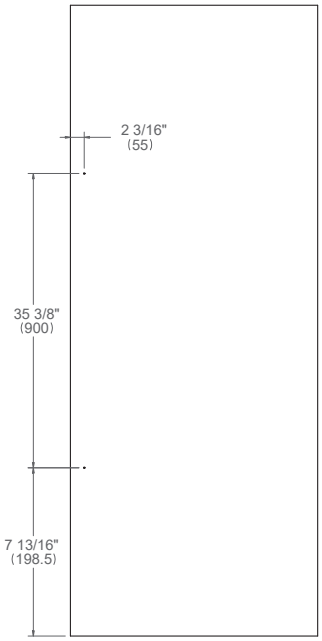

BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR

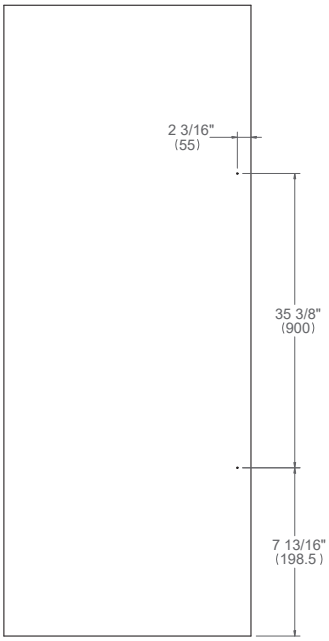

HANDLE INSTALLATION ON CUSTOM PANELS


In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles,it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel.
Recommended drill bit size to drill the pilot hole is 9,5 mm (3/8”).

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.


Dimensions in parentheses are millimeters unless otherwise specified.

Bottom Mount Refrigeration Handles


PROFESSIONAL SERIES
PROHK36PI
PROHK30PI




MASTER SERIES
MASHK36PI
MASHK30PI




HERITAGE SERIES
HERHK36PI
HERHK30PI



BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR

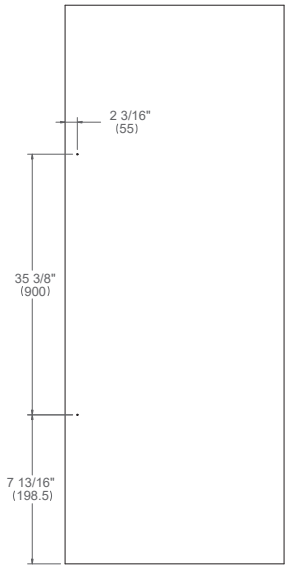

BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR

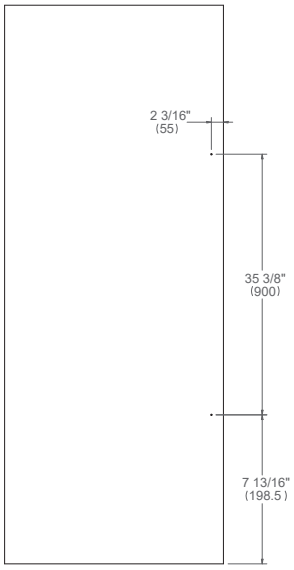

HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles,it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel.
Recommended drill bit size to drill the pilot hole is 9,5 mm (3/8”).

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.

BERTAZZONI.COM



TO COOK BEAUTIFULLY