will boot at the SPD speed at default BIOS settings with compatible

sids to reach the rated potential XMP/EXPO overclock speed of the memory kit, subject to the use of compatible hardware. y kits with XMP/EXP0, enable XMP/EXP0/DOCP/A-XMP profile in

Reaching the rated XMP/EXPO overclock speed and system stability will depend on the compatibility and capability of the motherboard and CPU used

 Usage in any manner inconsistent with manufacturer specifications, warnings, damage to the system or its components. designs, or recommendations will result lower speeds, sy /stem instability, or

 Computer components may have sharp edges. Caution is required and protective wear is recommended when handling computer components

 For extended product information or manufacturer recommendations, visit the G.SKILL website at www.gskill.com.

For product support and related questions, please contact G.SKILL tech support via email (techsupport@gskill.com).

Technical Support


emany: cody@gskill.com -1-909-598-6860 (ustech@gskillusa.com) -85-021-6191-8390 (cntech@gskill.com) +886-2-2766-7889 (techsupport@gskill.com)

or none preduct information, please visit www.gskill.com.



G.SKILL EUROPE B.V. De Donge 17 5684PX Best

2022 G.SKILL International Enterprise Co., Ltd. All rights reserved.

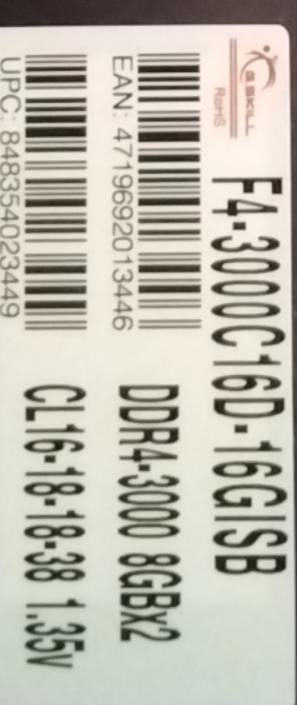

Made in Taiwan