

EasyAcc

IFlash PD 2-Port Wall Charger



Model: P91-1C1A-33W-EU
Input: 100-240V~50/60Hz 1.0A Max
USB-C (PD) Output: 5.0V=3.0A(15.0W) / 9.0V=3.0A(27.0W) / 12.0V=2.5A(30.0W) / 15.0V=2.0A(30.0W) / 20.0V=1.5A(30.0W)
PPS 3.3V-11.0V=3.0A(33.0W Max) / 3.3V-16.0V=2.0A(32.0W Max)
USB-A (QC) Output: 5.0V=3.0A(15.0W) / 9.0V=3.0A(27.0W) / 12.0V=2.5A(30.0W) / 20.0V=1.5A(30.0W Max)
PD+QC Output: 5.0V=3.0A(15.0W Max)
Output: 33.0W Max



EasyAcc

IFlash PD 2-Port Wall Charger

Model: P91-1C1A-33W-EU
Input: 100-240V~50/60Hz 1.0A Max
USB-C (PD) Output: 5.0V=3.0A(15.0W) / 9.0V=3.0A(27.0W) / 12.0V=2.5A(30.0W) / 15.0V=2.0A(30.0W) / 20.0V=1.5A(30.0W)
PPS 3.3V-11.0V=3.0A(33.0W Max) / 3.3V-16.0V=2.0A(32.0W Max)
USB-A (QC) Output: 5.0V=3.0A(15.0W) / 9.0V=3.0A(27.0W) / 12.0V=2.5A(30.0W) / 20.0V=1.5A(30.0W Max)
PD+QC Output: 5.0V=3.0A(15.0W Max)
Output: 33.0W Max

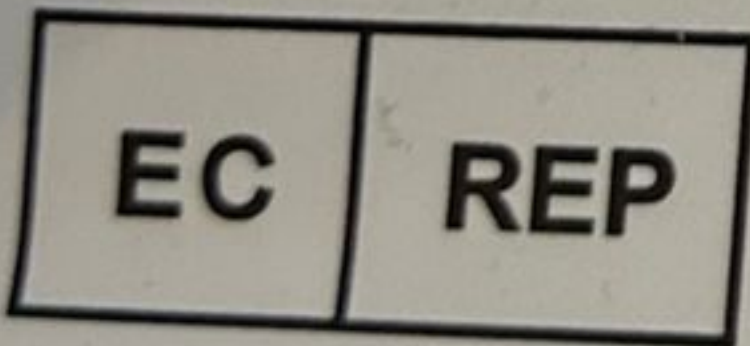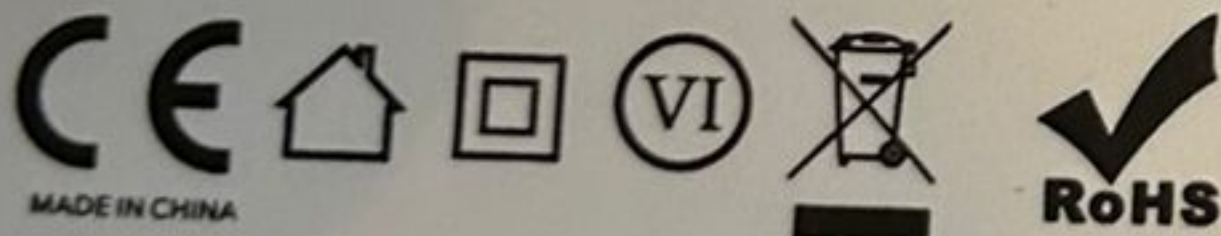

uGoeasy GmbH
Anton-Schmid-Strasse 10 A
24768 Rendsburg
-Deutschland-
Email: Import@ugoeasy.de

Manufacturer: EASYACC TECHNOLOGY CO., LIMITED
Manufacturer Address: UNIT 2508A 25/F BANK OF AMERICA TOWER 12 HARCOURT RD, CENTRAL, HK