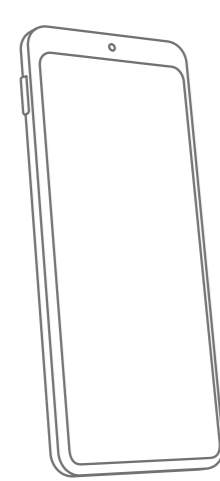
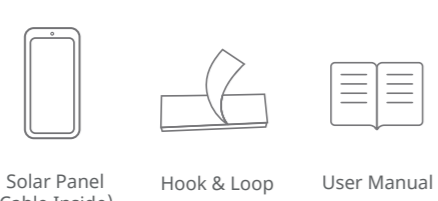
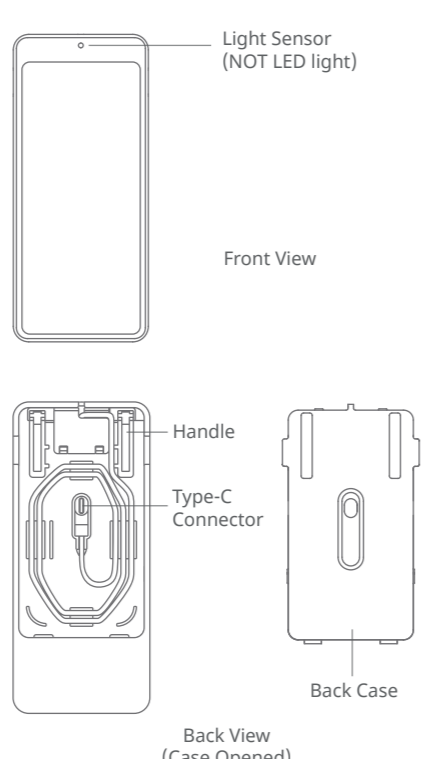
















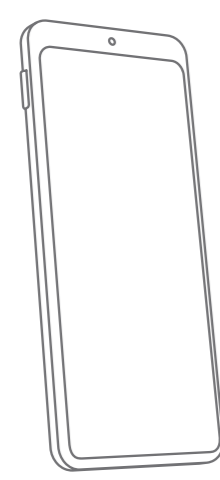

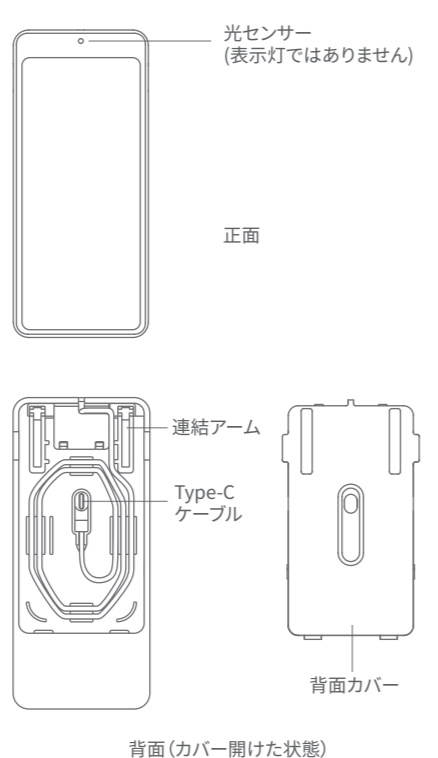


















文件名称: 太阳能版说明书英日同版设计	设计师: HJ	完成时间: 2020/10/29
版本号: Solar Panel-EN & JP-2010	成品尺寸: 70*120mm	
材质和工艺: 内页128g铜版纸 顺序打样,红色为指定潘通色PMS-2034C		
更改内容: 增加一页I型Curtain安装步骤		

<p><b>SwitchBot Solar Panel User Manual</b></p> 	<p><b>In the Box</b></p>  <p>Solar Panel (Cable Inside) Hook &amp; Loop User Manual</p> <p><b>Contact and Support</b></p> <p>Setup and Troubleshooting: support.switch-bot.com Support Email: support@wondertech.hk</p> <p>Feedback: Please send feedback via the SwitchBot App in the left side menu with the details of the issue.</p>	<p><b>Device Instruction</b></p>  <p>Light Sensor (NOT LED light) Front View Handle Type-C Connector Back View (Case Opened) Back Case</p>	<p><b>Stick on Your Curtain</b></p> <p>If the Solar Panel cannot face direct sunlight, you can connect it with SwitchBot Curtain using the cable in the box and stick the Solar Panel on your curtain.</p>  <p>① Open the case at the back and take out the cable.</p>  <p>② Stick the 3 Loops onto the back of Solar Panel firmly and wait for 5 hours.</p>	 <p>③ Stick the Hook firmly to a spot on your curtain where it is exposed to direct sunlight and the Solar Panel, while attached, can connect to a properly installed SwitchBot Curtain through its cable. Then leave the Hook there for 5 hours.</p>  <p>④ Put the Solar Panel onto the Hook and connect the cable to your SwitchBot Curtain.</p>	<p><b>Install on SwitchBot Curtain U Rail</b></p> <p>Note: at this moment, your SwitchBot Curtain should be already installed on your curtain track.</p>  <p>① Take out the 2 handles.</p>  <p>② Connect the Type-C connector to the SwitchBot Curtain.</p>  <p>③ Insert the 2 handles into the Hook Pairs and make sure it is firmly hanged.</p>  <p>④ You should see the Solar Panel and SwitchBot Curtain is securely connected.</p>	<p><b>Install on SwitchBot Curtain Rod</b></p> <p>Note: at this moment, your SwitchBot Curtain should be already installed on your curtain track.</p>  <p>① Take out the 2 handles.</p>  <p>② Connect the Type-C connector to the SwitchBot Curtain.</p>  <p>③ Pull the SwitchBot Curtain down gently and insert the 2 handles into the Hook Pairs and make sure it is firmly hanged.</p>  <p>④ You should see the Solar Panel and SwitchBot Curtain is securely connected.</p>	<p><b>Install on SwitchBot Curtain I Rail</b></p> <p>Note: at this moment, your SwitchBot Curtain should be already installed on your curtain track.</p>  <p>① Take out the 2 handles.</p>  <p>② Connect the Type-C connector to the SwitchBot Curtain.</p>  <p>③ Insert the 2 handles into the Hook Pairs and make sure it is firmly hanged.</p>  <p>④ You should see the Solar Panel and SwitchBot Curtain is securely connected.</p>	<p><b>Specification</b></p> <p>Model Number: W1001000 Color: White / Black Material: ABS plastic with UV-Resistant coating Product Size: 72mm x 765mm x 25mm Product Net Weight: 100g Power: Solar Panel Power Connection: 55cm USB Type-C cable Setup Requirements: Direct sunlight Output: 5V=250mA Operating Conditions: -20°C~60°C / 10-90% RH</p> <p><b>Return and Refund Policy</b></p> <p>This product has one-year warranty (start from the purchasing day). The situations below do not fit the Return and Refund Policy:</p> <ul style="list-style-type: none"> <li>Intended damage or abuse.</li> <li>Inappropriate storage (drop down or soaking in water).</li> <li>User modify or repair.</li> <li>Using loss.</li> <li>Force majeure damage (Natural disasters).</li> </ul> <p>Warning: Please avoid falling or any forms of physical impact.</p>	<p><b>CE Warning</b></p> <p>Manufacturer's Name: Woon Technology (Danzhen) Co., Ltd. Sample Description: SwitchBot Solar Panel Trade Mark: SwitchBot Model number: W1001000 Operating Temperature: -20°C-60°C This product is a fixed location. To comply with RF exposure requirements, a minimum separation distance of 20cm must be maintained between the user's body and the device, including the antenna. Use only the supplied or an approved antenna. This device in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. All essential radio test values have been carried out. 1. CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS. 2. The device complies with RF specifications when the device is used at 20cm from your body.</p> <p><b>FCC Warning</b></p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.</p>	<p>These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can receive radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> <li>Reorient or relocate the receiving antenna.</li> <li>Increase the separation between the equipment and receiver.</li> <li>Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li> <li>Consult the dealer or an experienced radio/TV technician for help.</li> </ul> <p>The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure condition without restriction. FCC RF exposure statement: The equipment complies with FCC Radiation exposure limit set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.</p>		<p>www.switch-bot.com</p>
---	---	---	--	--	---	---	---	--	--	--	--	---------------------------

<p><b>SwitchBot ソーラーパネル 取扱説明書</b></p> 	<p><b>パッケージ内容</b></p>  <p>ソーラーパネル (ケーブル含む) マスキングテープ 取扱説明書</p> <p><b>製品仕様</b></p> <p>製品番号: W1001000 カラー: ホワイト/ブラック 材質: 紫外線放射のUV遮断型 サイズ: 72mm x 765mm x 25mm 重量: 100g エネルギー: 太陽光 ケーブル: 55cm USB Type-Cケーブル 設置環境: 日光条件が良いところ 出力: 5V=250mA 使用環境: -20°C~60°C / 10-90% RH</p>	<p><b>各部のなまえ</b></p>  <p>光センサー (表示灯ではありません) 正面 連結アーム Type-C ケーブル 背面カバー 背面 (カバー開けた状態)</p>	<p><b>カーテン表面に取り付ける方法</b></p> <p>日光条件が不十分の場合、SwitchBotソーラーパネルをカーテン表面に取り付け、日光不足による充電不可を改善することができます。</p>  <p>① 裏面カバーを外し、ケーブルを取り出してから、カバーを閉じます。</p>  <p>② 付属のマスキングテープのルーア面を指定されたところしっかりと押し付け、ケーブルをしっかりと付けます。長時間はと持ちます。</p>	 <p>③ マスキングテープのフック面をカーテンの目出しがよい場所 (SwitchBotカーテンの縫製跡のソーラーパネルの取り付け状態を想定して、充電ケーブルには接続を待たず必要がある) に取り、1分程度しっかりと押し付け、そしてケーブルをそのまま5分程度放置してください。</p>  <p>④ その後、ソーラーパネルをカーテン表面に押し付け、ケーブルをしっかりと押し付け、ケーブルをしっかりと付けます。</p>	<p><b>SwitchBotカーテン(U型)に取り付ける方法</b></p> <p>ソーラーパネルの取り付けはSwitchBotカーテンがカーテンレールに取り付けられた後、行われます。</p>  <p>① カバーにあるホルダーを引きます。</p>  <p>② SwitchBotカーテン本体とアームの間にカーテンを差し込み、ソーラーパネルを固定させます。</p>  <p>③ SwitchBotカーテンのType-Cポートに差し込みます。</p>  <p>④ ソーラーパネルをしっかりとSwitchBotカーテンに取り付けられたらご確認ください。</p>	<p><b>SwitchBotカーテン(ボールタイプ)に取り付ける方法</b></p> <p>ソーラーパネルの取り付けはSwitchBotカーテンがカーテンレールに取り付けられた後、行われます。</p>  <p>① カバーにあるホルダーを引きます。</p>  <p>② SwitchBotカーテンを確めます。ソーラーパネルをフックと本体の間にある溝間に差し込み、固定させます。</p>  <p>③ SwitchBotカーテンのType-Cポートに差し込みます。</p>  <p>④ ソーラーパネルをしっかりとSwitchBotカーテンに取り付けられたらご確認ください。</p>	<p><b>SwitchBotカーテン(I型)に取り付ける方法</b></p> <p>ソーラーパネルの取り付けはSwitchBotカーテンがカーテンレールに取り付けられた後、行われます。</p>  <p>① カバーにあるホルダーを引きます。</p>  <p>② SwitchBotカーテン本体とフックの間にカーテンを差し込み、ソーラーパネルを固定させます。</p>  <p>③ SwitchBotカーテンのType-Cポートに差し込みます。</p>  <p>④ ソーラーパネルをしっかりとSwitchBotカーテンに取り付けられたらご確認ください。</p>	<p><b>返品・交換について</b></p> <p>本製品はご購入日から1年間の保証期間が設けられています。ただし、下記項目に該当する場合は無償保証の対象外となります。予めご了承ください。</p> <ul style="list-style-type: none"> <li>修理上の取り戻しと修理プログラムの注意書きに反しない限り使用による故障および修理。</li> <li>弊社以外による分解や修理、改造による故障および修理。</li> <li>肉類による故障および修理。不適切な使用による汚損及び材料の劣化品交換。</li> <li>ご購入後の転送、移動、取り付け時の落下などによる故障および修理。</li> <li>火災や天災、テロ、公費、損害、真実電圧などによる故障及び修理。</li> </ul> <p>※ 注意: 落下や衝撃は故障の原因になりますのでご注意ください。</p>	<p><b>サポートとアフターサービス</b></p> <ul style="list-style-type: none"> <li>■ サポートページ: support.switch-bot.com/hc/ja</li> <li>■ サポートメール: support@switchbot.jp</li> <li>■ フォードバック: 動作不良、使用方法不明、交換や返金などお気軽にSwitchBotアフターサービスセンターまでフォードバックより意見やアドバイスをご提出ください。 ※ 動作不良の場合は迅速な状況把握のため、不具合がわかる動画、写真やスクリーンショットの添付を一緒にお願いします。</li> </ul>			<p>www.switchbot.jp</p>
---	--	---	--	--	--	--	--	---	---	--	--	-------------------------