

ZEN CAN

of our latest desktop amplifier.
most hungry, high impedance
put at the rear via XLR to an
s: 0/6/12/18dB.
y and super low distortion

ass response.
ncert atmosphere.

SPECIFICATIONS:

Input voltage:

DC 5V/2.5A, AC 100 - 240V, 50/60Hz (Pow

Max Output:

Balanced:
> 15.1V/385 mW (@ 600 Ohm)
> 11.0V/1890 mW (@ 64 Ohm)
> 6.2V/1200 mW (@ 32 Ohm)
> 7.6V/98 mW (@ 600 Ohm)
> 7.4V/870 mW (@ 64 Ohm)
> 7.2V/1600 mW (@ 32 Ohm)

S-E:

THD & N:

Balanced:
< 0.006% (@ 360 mW/2.4V 16 Ohm)
< 0.005% (@ 100 mW/1.27V 16 Ohm)

SNR:

Balanced:
> 120dBA (@ 15.2V)
> 118dBA (@ 7.6V)

Max. Input:

Balanced:
7.4V RMS
RCA:
3.8V RMS
3.5mm:
1.92V RMS

Gain:

0dB, 6dB, 12dB and 18dB

Frequency Response:

10Hz - 200kHz (-3dB)

Power consumption:

No Signal ~5W
Max Signal ~12W

Dimensions:

158 x 117 x 35 mm
6.2" x 4.6" x 1.4"


Net weight:

515g (1.14 lbs)

Warranty period:

12 months

Specifications are subject to change without notice.

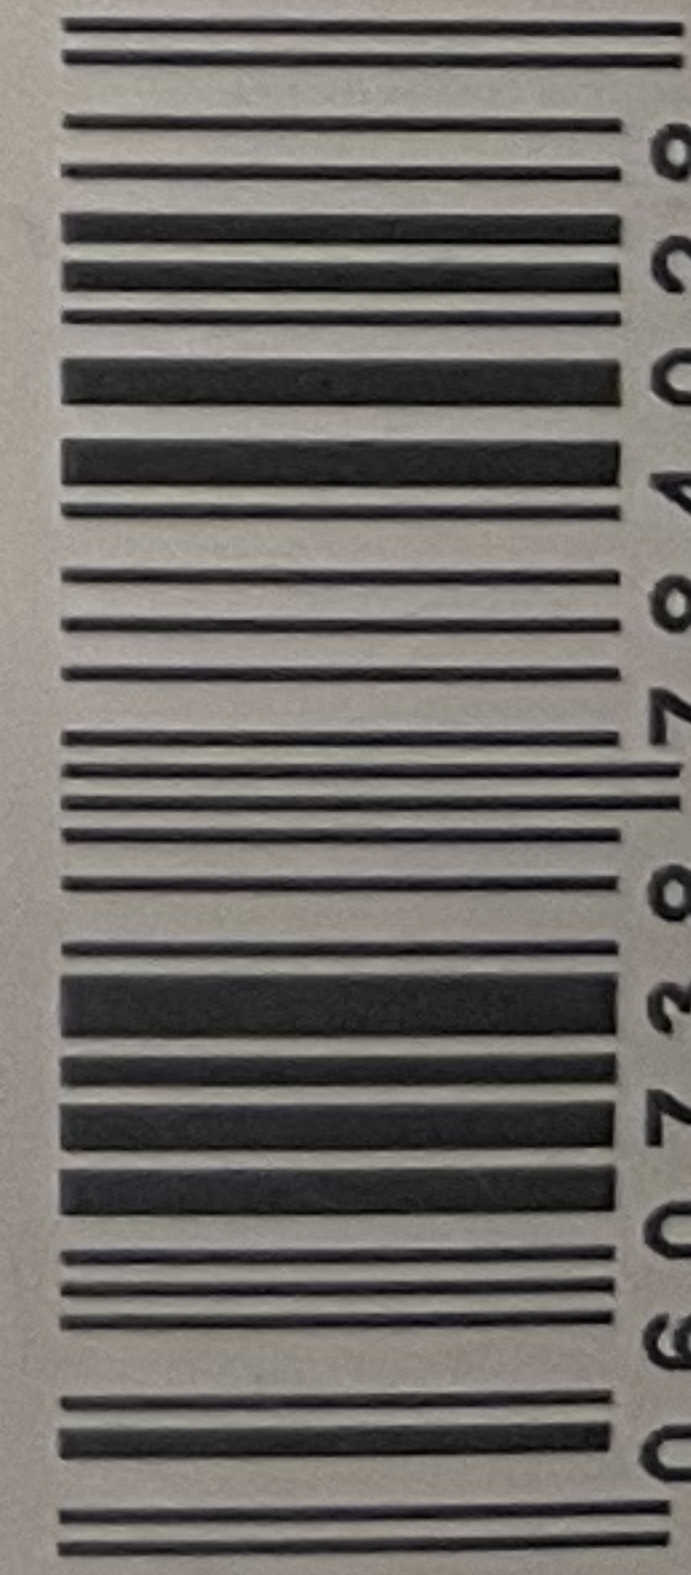

5 060738 784028



Technology licensed from AMR-Audio, UK
Assembled in China

ifi

ifi-audio.com

Ver1.1