


Inspiron 14 5410

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Set up your Inspiron 14 5410.....	4
Chapter 2: Views of Inspiron 14 5410.....	6
Right.....	6
Left.....	6
Top.....	7
Display.....	8
Bottom.....	9
Chapter 3: Specifications of Inspiron 14 5410.....	10
Dimensions and weight.....	10
Processor.....	10
Chipset.....	11
Operating system.....	11
Memory.....	11
External ports.....	12
Internal slots.....	12
Wireless module.....	12
Audio.....	13
Storage.....	13
Intel Optane Memory H20 with Solid-State Storage (optional).....	14
Keyboard.....	14
Camera.....	15
Touchpad.....	15
Power adapter.....	16
Battery.....	16
Display.....	17
Fingerprint reader (optional).....	18
GPU—Integrated.....	18
GPU—Discrete.....	18
Operating and storage environment.....	18
Chapter 4: Dell ComfortView.....	20
Chapter 5: Keyboard shortcuts.....	21
Chapter 6: Getting help and contacting Dell.....	23

Set up your Inspiron 14 5410

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



NOTE: To conserve battery power, the battery might enter power-saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search in the Knowledge Base Resource at www.dell.com/support.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps in Windows in S Mode








Resources	Description
	<p>Dell Product Registration</p> <p>Register your computer with Dell.</p>
	<p>Dell Help & Support</p> <p>Access help and support for your computer.</p>
	<p>SupportAssist</p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at www.dell.com/serviceabilitytools. Click SupportAssist and then, click SupportAssist for Home PCs.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>

Table 2. Locate Dell apps in Windows

Resources	Description
	<p>My Dell</p> <p>Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p>
	<p>Dell Update</p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information on using Dell Update, search in the Knowledge Base Resource at www.dell.com/support.</p>
	<p>Dell Digital Delivery</p> <p>Download software applications, which are purchased but not preinstalled on your computer. For more information on using Dell Digital Delivery, search in the Knowledge Base Resource at www.dell.com/support.</p>
	<p>SupportAssist</p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at www.dell.com/serviceabilitytools. Click SupportAssist and then, click SupportAssist for Home PCs.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>

Views of Inspiron 14 5410

Right



1. microSD-card slot

Reads from and writes to the microSD-card. The computer supports the following card types:

- micro-Secure Digital (mSD)
- micro-Secure Digital High Capacity (mSDHC)
- micro-Secure Digital Extended Capacity (mSDXC)


2. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

3. Global headset jack

Connect headphones or a headset (headphone and microphone combo).

Left

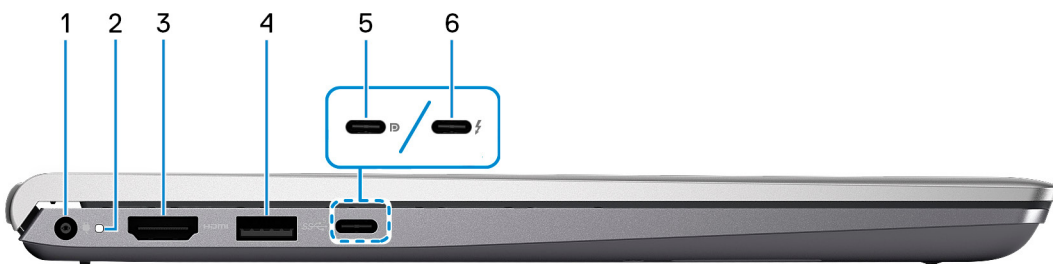

1. Power-adaptor port

Connect a power adapter to provide power to your computer and charge the battery.

2. Power and battery-status light

Indicates the power state and battery state of the computer.

Solid white—Power adapter is connected and the battery is charging.

Solid amber—Battery charge is low or critical.

Off—Battery is fully charged.

NOTE: On certain computer models, the power and battery-status light are also used for diagnostics. For more information, see the *Troubleshooting* section in your computer's *Service Manual*.

3. HDMI 1.4 port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

4. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

5. USB 3.2 Gen 2 Type C port with DisplayPort 1.4 and Power Delivery

Connect devices such as external storage devices, printers, and external displays. Provides data transfer rate of up to 10 Gbps.

Supports Power Delivery that enables two-way power supply between devices. Provides up to 15 W power output that enables faster charging.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

6. Thunderbolt 4.0 port with Power Delivery

Supports USB4, DisplayPort 1.4, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.


NOTE: You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, search in the Knowledge Base Resource at www.dell.com/support.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

NOTE: USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

NOTE: Thunderbolt 4 supports two 4K displays or one 8K display.

Top

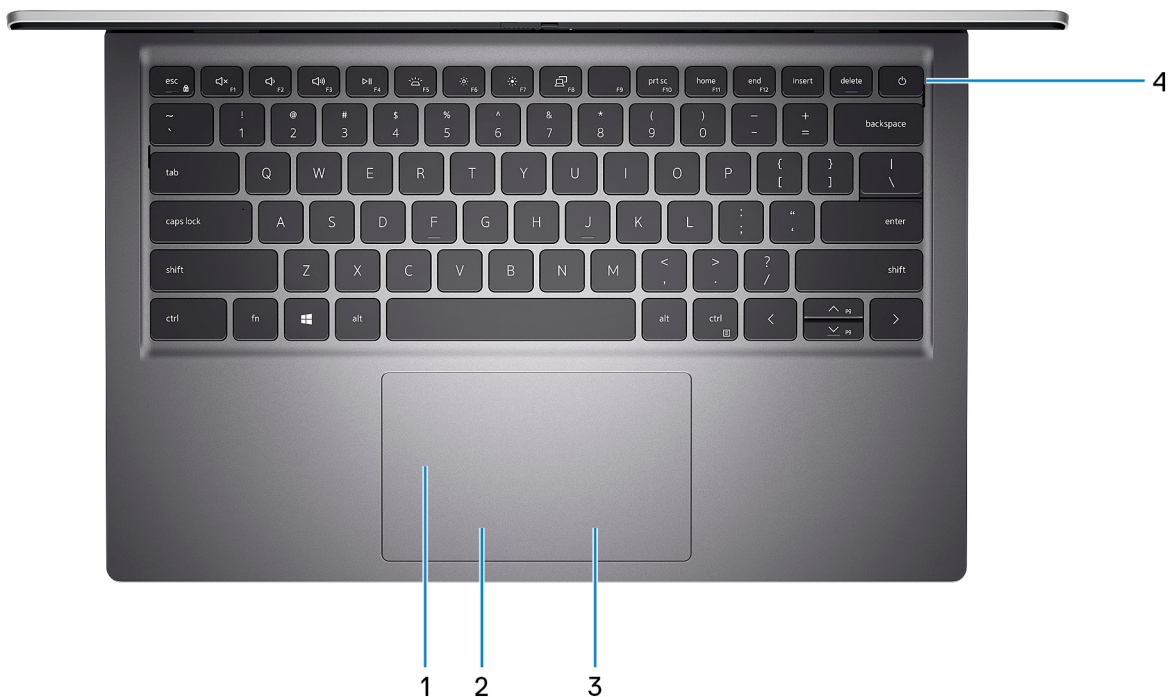

1. Left-click area

Press to left-click.

2. Precision touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

3. **Right-click area**

Press to right-click.

4. **Power button with optional fingerprint reader**

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for four seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.

NOTE: You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

Display



1. **Left microphone**

Provides digital sound input for audio recording and voice calls.

2. **Privacy shutter**

Slide the privacy shutter to cover the camera lens and protect your privacy when the camera is not in use.

3. **Camera**

Enables you to video chat, capture photos, and record videos.


4. **Camera-status light**

Turns on when the camera is in use.

5. **Right microphone**

Provides digital sound input for audio recording and voice calls.

Bottom

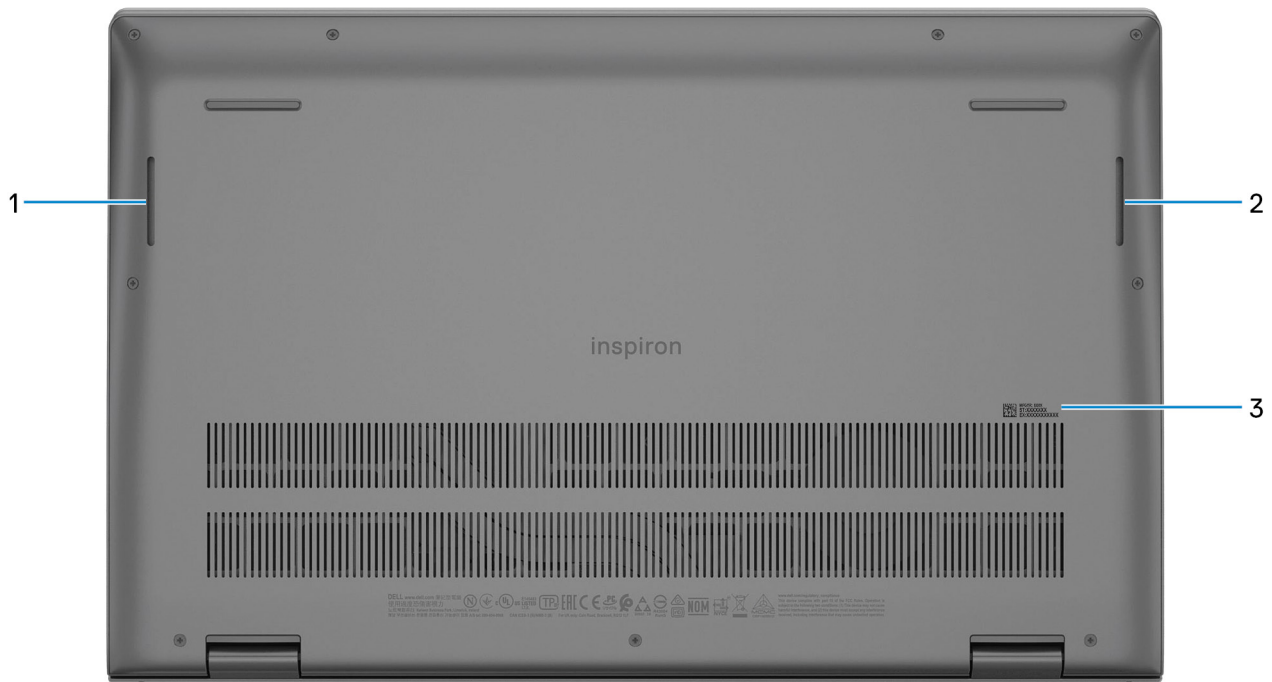

1. Left speaker

Provides audio output.

2. Right speaker

Provides audio output.

3. Service Tag label


The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

Specifications of Inspiron 14 5410

Dimensions and weight

The following table lists the height, width, depth, and weight of your Inspiron 14 5410.

Table 3. Dimensions and weight

Description	Values
Height:	
Front height	17.02 mm (0.67 in.)
Rear height	17.99 mm (0.71 in.)
Width	321.27 mm (12.65 in.)
Depth	212.80 mm (8.38 in.)
Weight (maximum)	1.44 kg (3.17 lbs)  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.

Processor

The following table lists the details of the processors supported by your Inspiron 14 5410.

Table 4. Processor

Description	Option one	Option two	Option three
Processor type	11 th Generation Intel Core i3-1125G4	11 th Generation Intel Core i5-11300H	11 th Generation Intel Core i7-11370H
Processor wattage	15 W	15 W	15 W
Processor core count	4	4	4
Processor thread count	8	8	8
Processor speed	Up to 3.7 GHz	Up to 4.4 GHz	Up to 4.8 GHz
Processor cache	8 MB	8 MB	12 MB
Integrated graphics	Intel UHD Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics

Chipset

The following table lists the details of the chipset supported by your Inspiron 14 5410.

Table 5. Chipset

Description	Values
Chipset	Integrated in the processor
Processor	11 th Generation Intel Core i3/i5/i7
DRAM bus width	64-bit
Flash EPROM	16 MB
PCIe bus	Up to Gen3

Operating system

Your Inspiron 14 5410 supports the following operating systems:

- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Windows 10 Home in S-mode, 64-bit
- Windows 11 Home, 64-bit
- Windows 11 Home in S-mode, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Ubuntu 20.04, 64-bit

Memory

The following table lists the memory specifications of your Inspiron 14 5410.

Table 6. Memory specifications

Description	Values
Memory slots	Two-SODIMM slots
Memory type	DDR4
Memory speed	3200 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	4 GB
Memory configurations supported	<ul style="list-style-type: none">• 4 GB, 1 x 4 GB, DDR4, 3200 MHz• 8 GB, 2 x 4 GB, DDR4, 3200 MHz, dual-channel• 12 GB, 1 x 4 GB + 1 x 8 GB, DDR4, 3200 MHz• 16 GB, 2 x 8 GB, DDR4, 3200 MHz, dual-channel• 16 GB, 1 x 16 GB, DDR4, 3200 MHz• 24 GB, 1 x 8 GB + 1 x 16 GB, DDR4, 3200 MHz• 32 GB, 2 x 16 GB, DDR4, 3200 MHz, dual-channel

External ports

The following table lists the external ports on your Inspiron 14 5410.

Table 7. External ports

Description	Values
USB ports	<ul style="list-style-type: none"> Two USB 3.2 Gen 1 ports One USB 3.2 Gen 2 Type-C port with DisplayPort 1.4 and Power Delivery <ul style="list-style-type: none"> NOTE: This port is only available on computers shipped with 11th Generation Intel Core i3/i5 processors. One Thunderbolt 4 port with Power Delivery <ul style="list-style-type: none"> NOTE: This port is only available on computers shipped with 11th Generation Intel Core i7 processors.
Audio port	One global headset jack
Video port/ports	One HDMI 1.4 port
Media-card reader	One microSD-card reader
Power-adapter port	One 4.5 mm x 2.9 mm DC-in
Security-cable slot	Not supported

Internal slots

The following table lists the internal slots of your Inspiron 14 5410.

Table 8. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> One M.2 2230 slot for WiFi and Bluetooth combo card One M.2 slot for 2230/2280 solid-state drive/M.2 2280 Intel Optane H20 <ul style="list-style-type: none"> NOTE: To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at www.dell.com/support.

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Inspiron 14 5410.

Table 9. Wireless module specifications

Description	Option one	Option two	Option three
Model number	Qualcomm QCA61x4A (DW1820)	Intel Wireless-AC 9462	Intel Wifi 6 AX201
Transfer rate	Up to 867 Mbps	Up to 2400 Mbps	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz

Table 9. Wireless module specifications (continued)

Description	Option one	Option two	Option three
Wireless standards	<ul style="list-style-type: none"> • WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) 	<ul style="list-style-type: none"> • WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) 	<ul style="list-style-type: none"> • WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) • Wi-Fi 6 (WiFi 802.11ax)
Encryption	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP 	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP 	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP
Bluetooth	Bluetooth 4.2	Bluetooth 5.1	Bluetooth 5.1

Audio

The following table lists the audio specifications of your Inspiron 14 5410.

Table 10. Audio specifications

Description	Values
Audio controller	Realtek
Stereo conversion	Supported
Internal audio interface	High-definition audio
External audio interface	Global headset jack
Number of speakers	Two
Internal-speaker amplifier	Supported (audio codec integrated)
External volume controls	Keyboard shortcut controls
Speaker output:	
Average speaker output	2 W
Peak speaker output	2.5 W
Subwoofer output	Not supported
Microphone	Dual-array microphones

Storage

This section lists the storage options on your Inspiron 14 5410.

Your Inspiron 14 5410 supports one of the following storage configurations:

- One M.2 2230 solid-state drive
- One M.2 2280 solid-state drive

The primary drive of your Inspiron 14 5410 is the M.2 solid-state drive where the operating system is installed.

Table 11. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid-state drive	PCIe Gen3.0x4 NVMe, up to 32 Gbps	Up to 1 TB
M.2 2280 solid-state drive	PCIe Gen3.0x4 NVMe, up to 32 Gbps	Up to 2 TB

Intel Optane Memory H20 with Solid-State Storage (optional)

Intel Optane Memory technology uses 3D XPoint memory technology and functions as a nonvolatile storage cache/accelerator and/or storage device depending on the Intel Optane Memory that is installed in your system.

Intel Optane Memory H20 with Solid-State Storage functions as both a nonvolatile storage cache/accelerator (enabling enhanced read/write speeds for hard drive storage) and a solid-state storage solution. It neither replaces nor adds to the memory (RAM) installed on your system.

Table 12. Intel Optane Memory H20 with Solid-State Storage specifications

Description	Values
Interface	PCIe NVMe Gen3 x4
Connector	M.2 2280
Form factor	2280
Capacity (Intel Optane memory)	Up to 32 GB
Capacity (solid-state storage)	Up to 512 GB

NOTE: Intel Optane Memory H20 with Solid-State Storage is supported on systems that meet the following requirements:

- 11th Generation or higher Intel Core i3/i5/i7 processors
- Windows 10 64-bit version or higher
- Intel Rapid Storage Technology driver version 18.1.0.1027 or higher

Keyboard

The following table lists the keyboard specifications of your Inspiron 14 5410.

Table 13. Keyboard specifications

Description	Values
Keyboard type	<ul style="list-style-type: none"> • Standard keyboard • Backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> • United States and Canada: 79 keys • United Kingdom: 80 keys • Japan: 83 keys
Keyboard size	X=19.05 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to

Table 13. Keyboard specifications (continued)

Description	Values
	perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key. i NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program. For more information, see Keyboard shortcuts .

Camera

The following table lists the camera specifications of your Inspiron 14 5410.

Table 14. Camera specifications

Description	Values		
Number of cameras	One		
Camera type	HD RGB camera		
Camera location	Front camera		
Camera sensor type	CMOS sensor technology		
Camera resolution:			
<table border="1" data-bbox="165 1081 316 1144"> <tr> <td data-bbox="165 1081 245 1144">Still image</td> <td data-bbox="245 1081 316 1144"></td> </tr> </table>	Still image		0.92 megapixel
Still image			
<table border="1" data-bbox="165 1144 316 1207"> <tr> <td data-bbox="165 1144 245 1207">Video</td> <td data-bbox="245 1144 316 1207"></td> </tr> </table>	Video		1280 x 720 (HD) at 30 fps
Video			
Diagonal viewing angle:	74.9 degrees		

Touchpad

The following table lists the touchpad specifications of your Inspiron 14 5410.


Table 15. Touchpad specifications

Description	Values		
Touchpad resolution:			
<table border="1" data-bbox="245 1574 395 1637"> <tr> <td data-bbox="245 1574 325 1637">Horizontal</td> <td data-bbox="325 1574 395 1637"></td> </tr> </table>	Horizontal		1920
Horizontal			
<table border="1" data-bbox="245 1637 395 1700"> <tr> <td data-bbox="245 1637 325 1700">Vertical</td> <td data-bbox="325 1637 395 1700"></td> </tr> </table>	Vertical		1080
Vertical			
Touchpad dimensions:			
<table border="1" data-bbox="245 1740 395 1803"> <tr> <td data-bbox="245 1740 325 1803">Horizontal</td> <td data-bbox="325 1740 395 1803"></td> </tr> </table>	Horizontal		115 mm (4.53 in.)
Horizontal			
<table border="1" data-bbox="245 1803 395 1865"> <tr> <td data-bbox="245 1803 325 1865">Vertical</td> <td data-bbox="325 1803 395 1865"></td> </tr> </table>	Vertical		70 mm (2.76 in.)
Vertical			
Touchpad gestures	For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article at support.microsoft.com .		

Power adapter

The following table lists the power adapter specifications of your Inspiron 14 5410.

Table 16. Power adapter specifications

Description		Values
Type		65 W E4 DC-in
Connector dimensions:		
	External diameter	4.50 mm
	Internal diameter	2.90 mm
Input voltage		110 VAC–240 VAC
Input frequency		50 Hz–60 Hz
Input current (maximum)		1.70 A
Output current (continuous)		3.34 A
Rated output voltage		19.50 VDC
Temperature range:		
	Operating	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

Battery

The following table lists the battery specifications of your Inspiron 14 5410.

Table 17. Battery specifications

Description	Option one	Option two	
Battery type	3-cell polymer, 41 Wh	4-cell polymer, 54 Wh	
Battery voltage	11.25 VDC	15 VDC	
Battery weight (maximum)	0.18 kg (0.40 lb)	0.23 kg (0.51 lb)	
Battery dimensions:			
	Height	206.40 mm (8.13 in.)	271.90 mm (10.70 in.)
	Width	82 mm (3.23 in.)	82 mm (3.23 in.)
	Depth	5.75 mm (0.23 in.)	5.75 mm (0.23 in.)
Temperature range:			
	Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)

Table 17. Battery specifications (continued)

Description		Option one	Option two
	Storage	-20°C to 65°C (-4°F to 149°F)	-20°C to 65°C (-4°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate) ⓘ NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		4 hours (when the computer is off)	4 hours (when the computer is off)
Coin-cell battery		CR2032	CR2032
⚠ CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.			

Display

The following table lists the display specifications of your Inspiron 14 5410.

Table 18. Display specifications

Description		Option one	Option two
Display type		14-inch, Full High Definition (FHD)	14-inch, Full High Definition (FHD)
Display-panel technology		Wide-Viewing Angle (WVA), ComfortView	Wide-Viewing Angle (WVA), ComfortView Plus
Display-panel dimensions (active area):			
	Height	173.99 mm (6.85 in.)	173.99 mm (6.85 in.)
	Width	309.35 mm (12.18 in.)	309.35 mm (12.18 in.)
	Diagonal	354.93 mm (13.97 in.)	354.93 mm (13.97 in.)
Display-panel native resolution		1920 x 1080	1920 x 1080
Luminance (typical)		250 nits	300 nits
Megapixels		2.0736	2.0736
Color gamut		45% (NTSC)	100% (sRGB)
Pixels Per Inch (PPI)		157	157
Contrast ratio (min.)		500:1	600:1
Response time (max.)		35 ms	35 ms
Refresh rate		60 Hz	60 Hz

Table 18. Display specifications (continued)

Description	Option one	Option two
Horizontal view angle	80 +/- degrees	80 +/- degrees
Vertical view angle	80 +/- degrees	80 +/- degrees
Pixel pitch	0.16 mm	0.16 mm
Power consumption (maximum)	3.60 W	4.5 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare
Touch options	No	No

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Inspiron 14 5410.

Table 19. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 dpi
Fingerprint-reader sensor pixel size	108 x 88

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Inspiron 14 5410.

Table 20. GPU—Integrated

Controller	Memory size	Processor
Intel UHD Graphics	Shared system memory	11 th Generation Intel Core i3
Intel Iris Xe Graphics	Shared system memory	11 th Generation Intel Core i5/i7

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Inspiron 14 5410.

Table 21. GPU—Discrete


Controller	Memory size	Memory type
NVIDIA GeForce MX450	2 GB	GDDR5

Operating and storage environment

This table lists the operating and storage specifications of your Inspiron 14 5410.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 22. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10000 ft)	-15.2 m to 10668 m (-49.87 ft to 35000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse.

Dell ComfortView

CAUTION: Prolonged exposure to blue light, particularly from digital sources, may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the white light spectrum which has a short wavelength and high frequency. Chronic exposure to blue light, particularly from digital sources, may disrupt sleep patterns and change our body's Circadian rhythm. Using the computer for an extended period may also cause fatigue in other body parts such as the neck, arm, back, and shoulder.

Dell low blue light displays optimize eye comfort with a flicker-free screen. The ComfortView feature reduces the amount of blue light emitted from the monitor to optimize eye comfort. ComfortView mode can be enabled and configured using the **Dell CinemaColor** (DCC) application. Dell ComfortView is certified by TÜV.

Dell CinemaColor

Dell CinemaColor (DCC) combines the hardware and software to deliver clear visuals that appear every bit as vibrant as the world around you. The DCC has four color profiles that optimize these settings depending on the content and your surroundings.

When you open DCC, you can choose **Movie (default)**, **ComfortView**, **Sports**, or **Animation** from the list. The ComfortView Profile optimizes eye comfort with a Low Blue Light software solution that meets TÜV standards to reduce harmful blue light emissions to make extended screen time easy on your eyes compared to standard digital panels while still retaining the vibrant colors.

ComfortView mode is certified by TÜV for the effective reduction of hazardous blue light by adjusting display parameters. You can adjust the Saturation, Temperature, and Contrast values to create your custom setting in the ComfortView mode.

NOTE: For more information on DellCinema components see KB article [000178241](https://www.dell.com/support) at <https://www.dell.com/support>.

ComfortView Plus

ComfortView Plus is a built-in, always-on, and virtually unnoticeable low blue light solution for Dell displays. ComfortView Plus employs a hardware-based design that allows for a wider blue spectrum, with a much lower peak and reduced intensity. Dell ComfortView Plus is certified by TÜV certified - low blue light hardware solution.

NOTE: ComfortView Plus is an optional hardware feature to be configured at the point of sale.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 in. to 28 in. (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.
- Take an extended break for 20 minutes every two hours.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **fn + Esc**. Subsequently, multi-media control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn + F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 23. List of keyboard shortcuts

Function key	Re-defined key (for multi-media control)	Behavior
F1	fn + F1	Mute audio
F2	fn + F2	Decrease volume
F3	fn + F3	Increase volume
F4	fn + F4	Play/Pause
F5	fn + F5	Toggle keyboard backlight (optional)
F6	fn + F6	Decrease brightness
F7	fn + F7	Increase brightness
F8	fn + F8	Switch to external display
F10	fn + F10	Print screen
F11	fn + F11	Home
F12	fn + F12	End

The **fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 24. List of keyboard shortcuts

Function key	Behavior
fn + B	Pause/Break
fn + H	Toggle between power light and battery-status light
fn + S	Toggle scroll lock
fn + R	System request
fn + ctrl	Open application menu
fn + esc	Toggle fn-key lock
fn + page up	Page up

Table 24. List of keyboard shortcuts (continued)



Function key	Behavior
fn + page down	Page down

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 25. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.