


ELECTRICAL TEST:

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

WIRE CONNECTION

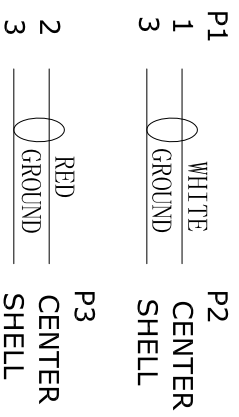

REV	ECN	TOLERANCE		DESCRIPTION	DATE	NAME
		INCHES	M/M			
8				heat-shrinkable tubing ~ ϕ 2.0MM~BLACK~	0.01	pcs
7				TRASPARENT PE ROHS LDPE	4	g
6		.X	.30	45P RED PVC ROHS	6	g
5		.XX	.10	45P WHITE(N-BHC 2001) PVC ROHS	6	g
4		.XXX	.05	45P BLACK PVC ROHS	6	g
3				RCA M SHELL PLATED:NICKEL BLACK INSULATION	2	pcs
2				DC3.5 M SHELL PLATED:NICKEL THREE TYPE	1	pcs
1				NO UL [7/0.127TC*1C+S(28/0.10TC)] *2F OD:2.8*2.8MM BLACK PVC	1.5	m
NO				DESCRIPTION	Q'TY	UNIT

REV	ECN	TOLERANCE	DESCRIPTION	DATE	NAME
		.X			
		.XX			
		.XXX			

SCALE	UNIT	MM	DATE	2019.10.22
SECOMP TITLE: ROLINE 3.5mm/ 2XRCA (M) Cable, 1.5m P/N : 11.09.4341				
DRAWING NO.:			CA1790167	
REV. AO	1/1			