


# BARK COLLAR

## USER GUIDE

AT05

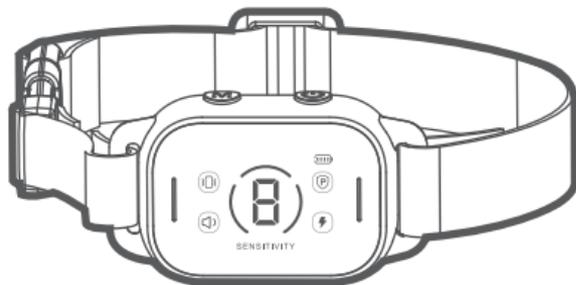

**DO NOT** start to use the device before watching important video guide at

<https://nhujkpet.com>

NOTE: Please read the user guide before using this product and keep the user guide properly.

✉ support@nhujkpet.com

☎ 1213-947-6789

Mon-Fri,9:00 am-5:00 pm PST/PDT

✉ support@nhujkpet.com

☎ 1213-947-6789


🌐 <https://nhujkpet.com/>

Mon-Fri,9:00 am-5:00 pm PST/PDT

Manufacturer: Quanzhou Purplebox Electronics Co., Ltd.  
manufacturer Address: Floor 3&4, No.41 Wanrong Street,  
Wansheng Community, Wan'an, Luojiang, Quanzhou,  
Fujian, China

Version: AT05 (V1.2) 20230429

## Packing List

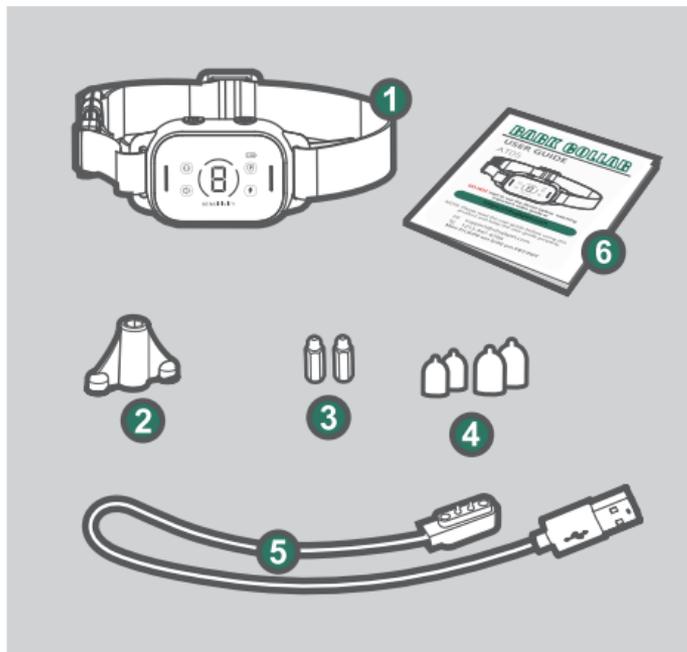

1. Bark Collar \* 1
2. Test Board & Mounting Board \* 1
3. Electric Shock Contactor \* 1set
4. Silicone Protective Sleeve \* 2set
5. Magnetic Charging Cable \* 1
6. User Guide \* 1

## Specification Parameters

Product Name: Pet Bark Collar

Battery: 300mAh/3.7V lithium battery

Standby time: 15 days

Waterproof Level: IP67

Net weight: 78g

Operating Temperature: -10°C ~ +50°C

Storage Temperature: -20°C ~ +50°C

Product Dimension: 70mm\*42mm\*24.5mm (L \* W \*H)

Product model: AT05

Input: DC5V/1A

Collar Length: 62cm

## Product Features

- 2 kinds of E-shock intensity can be adjusted
- Color display screen
- Intelligent progressive stop barking
- Precise analysis of the spectral characteristics of the barking sound to filter out excess noise
- Built-in gravity sensor for incremental analysis of the vibration generated by barking dogs, filtering out other barking dogs and reduce false triggering.
- 8 levels of sensitivity adjustment for easy use in different environments
- 4 types of anti-barking modes: warning sound, vibration, warning sound & vibration, warning sound & vibration & electric shock mode
- Built-in test mode
- IP67 waterproof

## Important statement

### Safe use statement



1. It is forbidden to use this product for aggressive dogs. Aggressive dogs can cause serious injury or even death to others. If you are not sure whether the product is suitable for your dog, please consult a professional dog training instructor.



2. It is forbidden for children to play with this product, please place the product out of reach of children.

### Electric shock safety statement



1. Before using the bark collar, please make sure your dog is healthy. If you are not sure about this, please consult the veterinarian.



2. When the bark collar is in the power-on state, the human body should avoid touching the electric shock contactors of the product.



3. If you find rashes and sores on the wearing part of your pet, please stop using this product until pet's skin recovers.

### ⚠ safety statement



1. Your pet needs a firm leash to prevent violent reactions during training. You can hold the leash to prevent your pet from running around. It is essential to ensure you and your pet's safety.



2. Pets should not wear the bark collar for more than 12 hours a day, and please adjust the wearing position every 1-2 hours.



3. Bark collar is suitable for dogs who weigh more than 8 lbs and are older than 6 months.



4. It is forbidden to use bark collar as a matching collar for a pet leash.



5. It is very important to check the contact part of collar every day for rashes or sores.



6. We recommend that you cut the long hair around the dog's throat appropriately, but it is not recommended to shave the hair completely.




7. Before playing with your pet, please remove the collar to avoid false triggering.

8. The IP67 standard means that the equipment can be placed in water up to one meter deep for half an hour without water entering the product and it is also dust-proof.

**Note:**The IP67 standard is a static test result of the laboratory.

# Product Instruction

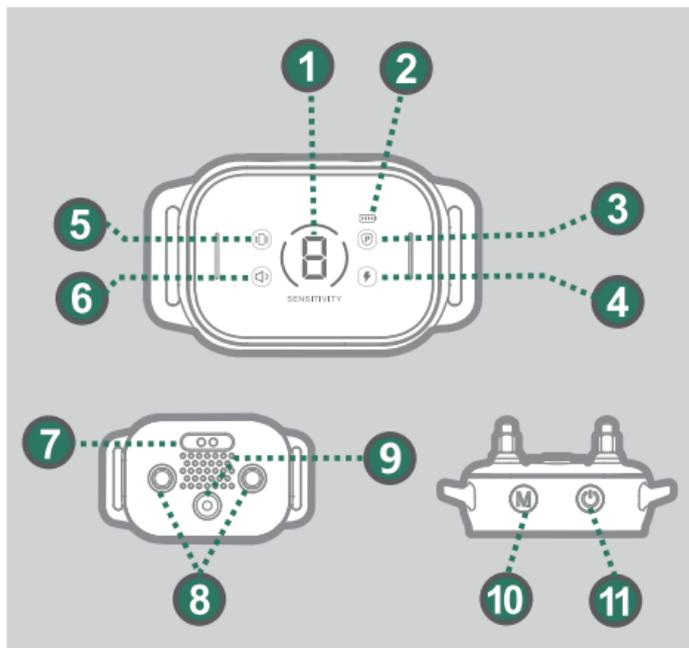

- |                     |                     |                  |
|---------------------|---------------------|------------------|
| 1.Sensitivity       | 2.Battery           | 3.Protected Mode |
| 4.E-shock           | 5.Vibration         | 6.Beep           |
| 7.Magnetic Charging | 8.E-shock contactor |                  |
| 9. Sound Sensor     | 10.Mode Key         | 11.ON/OFF Key    |

# Instructions

## 1.Charge the bark collar before use

When the Bark Collar is charging, the battery icon flashes in a runing pattern and the red indicator light on constantly. Charging time is 1.5-2 hours.

When the battery is fully charged, a "beep...beep..." tone will sound, the battery icon will light up and the indicator light will light up in green.



## 2.Power on



Press and hold the  button for 2 seconds, the display lights up and 2 beeps sound to indicate the bark collar is turned on. The green light flashes once every 5 seconds when the power is on.

## Instructions

### 3. Testing the bark collar

How to enter the test mode: short press the  button until the sensitivity shows . Then simulate a barking sound against the sound sensor position on the back.



**Note:** Test mode time is 12s and it returns to sensitivity level 8 after timeout or trigger.

### 4. Bark collar output

When the bark collar is triggered in test mode, it will emit a warning sound, vibration and E-shock.



According to the actual use situation, choose the long/short electric shock contacts, install them in the holes on the back of the collar with the mounting board, and then choose the long/short silicone covers to place on the the electric shock contacts.

## Instructions



Place the test board on the conductive silicone sleeve. If the shock feature works, the test light will be lit.


### 5. How to wear

The circumference of the collar ranges from 20-62 cm (8 inches to 25 inches). Before wearing, please adjust the buckle and slider to the right length to ensure that the shock contacts can be firmly attached on the your dog's neck. If you can fit a finger between the collar and the dog's neck, it's right. The device works best when worn under the dog's neck.

1



2



3



4



## Instructions

### 6. Sensitivity Setting

The sensitivity level can be adjusted from level 1 to level 8. The higher the number, the higher the sensitivity level, and the more easily it can be triggered.

The device has a built-in motion sensor, and the sensitivity ranges from level 1 to level 7. The device can only be triggered if it detects both dog barking and motion. This reduces false triggering. Level 8 only recognizes dog barking and is suitable for quiet environments.


Please refer to the table below for the sensitivity settings of the device:

Sensitivity Level	1	2	3	4	5	6	7	8
Barking Recognition	✓	✓	✓	✓	✓	✓	✓	✓
Motion Detection	✓	✓	✓	✓	✓	✓	✓	✗
Setting Reference	Large ≥ 50lbs			Medium 20-50lbs		Small ≤ 20lbs		
Dog Barking Volume	(((•			((•		•		

## Instructions

The bark stopper works best when worn directly under the dog's neck. Wearing it on the side or back can affect its effectiveness.


**Note:** The device uses intelligent dog bark waveform recognition technology. Environmental noise may be similar to the frequency of dog barking, such as outdoor noise or when there is TV or music playing nearby. If the device is triggered too easily, please adjust the sensitivity level accordingly.



When the display is on, short press  the button to adjust the sensitivity

### 7. Barking collar mode setting

There are 4 kinds of stop barking modes, including beep, vibration, beep + vibration, beep + vibration + electric shock.



With the display lit, short press the **M** button to adjust the sensitivity level.

## Instructions

Regarding these modes of Beep, Vibration, Beep & Vibration, bark collar will gradually increase its intensity when the dog barks continuously. There are 5 times of working procedure in a cycle. When the dog does not stop barking within 30 seconds in the 5th level, it will remain unchanged.

In the case of continuous barking in the shock mode, bark collar will gradually increase its intensity to level 5.


Every 1 level will be increased when the two adjacent barks are within 30 seconds, and till the level up to 5th level, it will enter to protection mode (collar not work for 1 minutes). After 1 minute of no operation it automatically resets back to the initial state (level 1). In protection mode, press the **⏻** button or **M** button to immediately reset to the initial operating state. In protection mode, the green light and protection icon flashes once every 3 seconds.



In protection mode, the green light and protection icon flashes once every 3 seconds.


## Instructions

### 8.How the mode works

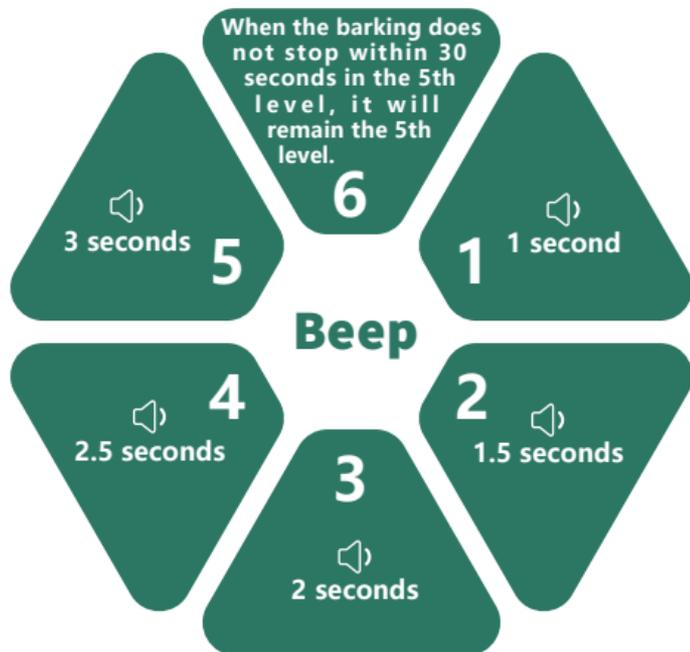


How the beep mode works

# Instructions

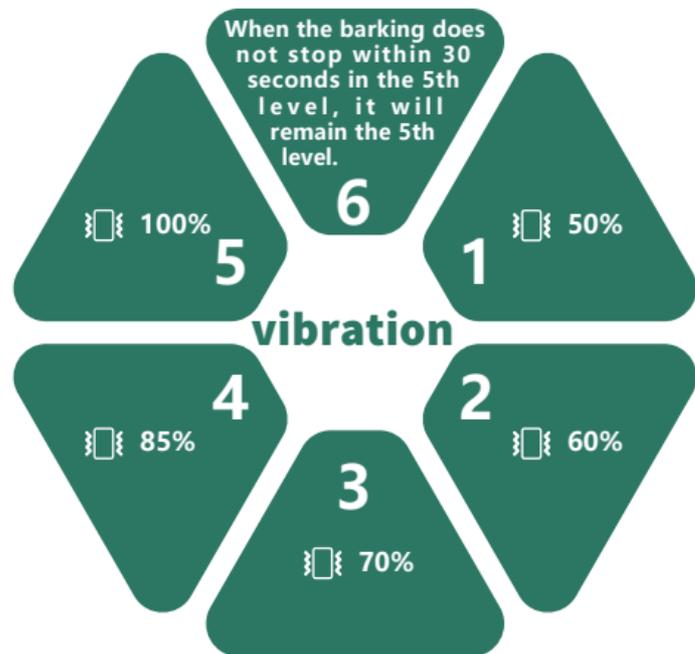


How the vibration mode works

# Instructions

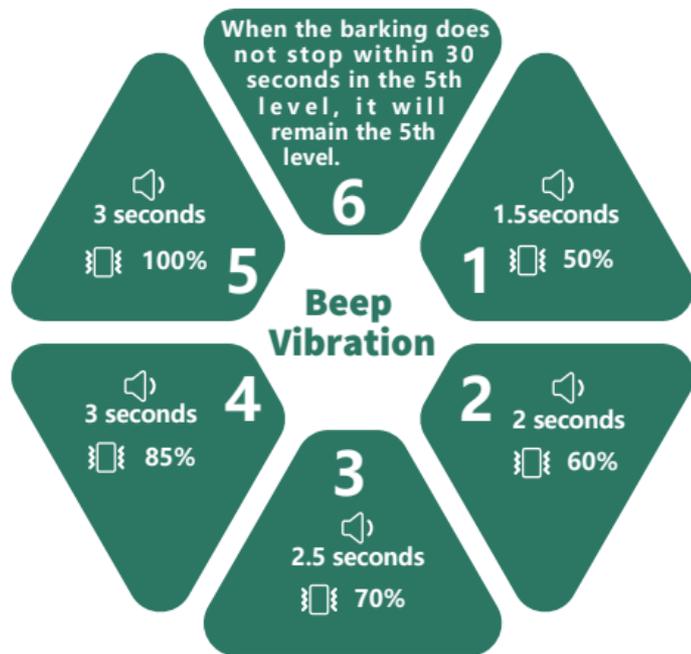

How the beep + vibration mode works

# Instructions

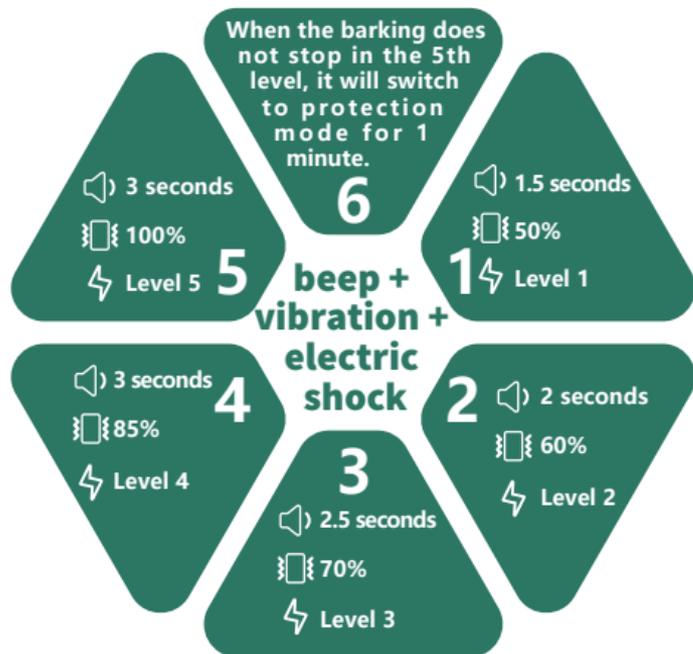


How the beep + vibration + electric shock mode work

# Instructions

## 9. E-shock intensity adjustment

When the equipment is power on, press and hold the M for 2 seconds to enter the E-shock intensity adjustment interface. Short press the M to adjust the E-shock intensity level, and it will automatically exit after 5 seconds of inactivity.

The E-shock intensity is divided into high and low levels. H means high level, suitable for dogs weighing more than 35 lbs; L means low level, suitable for dogs weighing less than 35 lbs.



Press and hold the M for 2 seconds to enter the E-shock intensity adjustment.



L indicates low, indicating the current E-shock intensity is weak



H indicates high, indicating the current E-shock intensity is strong

# Instructions


## 10. Power off

Press and hold the  button for 2 seconds, the display will turn off and the collar will beep once to indicate the device is powered off.



## 11. Restore default settings

Within 15 seconds of rebooting, press and hold the  or  for 2 seconds, and the device will beep twice to indicate that factory setting is restored.



The default sensitivity is level 8, and the default mode is beep + vibration + electric shock.

## 12. Low battery alarm

When there is only 1 level of electricity left, the indicator will flash red once every 5 seconds, which means the bark collar will automatically turn off 20 minutes later.



# Troubleshooting Method

Major Issues	Cause Analysis	Solution
Power on failed	<ol style="list-style-type: none"> <li>1. Low battery power.</li> <li>2. Cannot power on after charging.</li> </ol>	<ol style="list-style-type: none"> <li>1. Please charge and power on again after it is fully charged.</li> <li>2. Please contact the dealer for replacement.</li> </ol>
Charging failed	<ol style="list-style-type: none"> <li>1. The red light does not light up when charging.</li> <li>2. The red light is on when charging, but the battery cannot be charged.</li> </ol>	<ol style="list-style-type: none"> <li>1. Please check whether the charging line interface or charger is in good contact. If they are in good contact, and the fault still exists, please contact the dealer.</li> <li>2. Please contact the dealer for replacement.</li> </ol>
Bark Collar does not respond to bark	<ol style="list-style-type: none"> <li>1. The bark collar is powered off.</li> <li>2. The sensitivity level is too low to work on your dog.</li> <li>3. The hole of sound sensor is blocked by something.</li> </ol>	<ol style="list-style-type: none"> <li>1. Please turn on the device and try again</li> <li>2. Please increase the sensitivity.</li> <li>3. Please remove anything that blocks the sound sensor.</li> </ol>
Bark collar not working/dog not responding	<ol style="list-style-type: none"> <li>1. The barker is in the shutdown state.</li> <li>2. The sensitivity level is too low to trigger the barking collar.</li> <li>3. The hole of the sound sensor is blocked by foreign matters.</li> <li>4. The collar is worn in the wrong position.</li> </ol>	<ol style="list-style-type: none"> <li>1. Long press to power on again.</li> <li>2. Adjust the sensitivity level.</li> <li>3. Remove foreign matters.</li> <li>4. Adjust the wearing position of the collar and wear it directly under the dog's neck.</li> </ol>
The barking collar does not respond to the simulated barking	With vibration detection in sensitivity level 1-7	When simulating the dog barking, please shake the barking collar.

## FAQ

**Q:** Why doesn't the bark collar work when the dog barking?

**A:** Possible reasons:  
 1.Low sensitivity - Increase sensitivity level.  
 2.Poor contact - Adjust collar tightness for better skin contact.

**Q:** Is the bark collar safe and humane?

**A:** All bark collar do not cause any direct physical harm to your pet, but they can make them feel very uncomfortable. Even so, do not overuse this product on your pet. Please refer to the manual for all safety statements.

**Q:** The device is triggered by other environmental noises?

**A:** We have optimized the waveform recognition technology to reduce false triggering, but there is still a chance that some environmental noises may have similar frequencies to barking and activate the product. To prevent this, please select a sensitivity level between 1-7 with motion detection. This will help reduce false triggering while ensuring effective barking control.

**Q:** Is it suitable for use in situations where multiple dogs are kept?

**A:** When you have more than 1 dog, please drop the sensitivity appropriately in order to reduce the chance of false triggering.

## Terms of Use & Liability

### Terms of Use & Liability

#### 1. Terms of Use

When you start using the product, it means that you have accepted all the terms, conditions and statements in this user guide.

#### 2. Use it correctly

This product is designed for pets that need training. Please use this product correctly and include reading the user guide and any specific "safety" and "caution" statements.

#### 3. Illegal use is forbidden

This product is suitable for pets. This device is not designed to harm pets. Using this product not in accordance with the user guide may violate local laws.

#### 4. Scope of Responsibility

The manufacturer is not responsible for any direct, indirect, punitive, non-significant losses and other indirect losses caused by incorrect use or abuse of this product. The buyer assumes all risks and responsibilities of using

#### 5. Modification of terms and conditions

The manufacturer reserves the right to change the terms, conditions and declarations related to the products.

## Certification Statements



This device complies with Part 15 of the FCC Rules.




The company declares under its own responsibility that this product complies with the basic requirements of CE (2014/30/EU) and RoHS (2011/65/EU). Without the approval of our company or the distributor, unauthorized changes or modifications to the equipment may violate the CE regulations, may cause the user to lose the right to operate the equipment, and invalidate the warranty.



### Recycling Information & Battery Disposal

Please observe the regulations for electronic and electrical devices to be disposed of in the respective country. In some countries or regions, this device must be recycled. If this device is no longer required, it must not be disposed of with normal municipal waste. Separate collection of spent batteries is required in many regions; check the regulations in your area before discarding spent batteries. For more recycling information, please refer to local regulations.

## Thank you very much

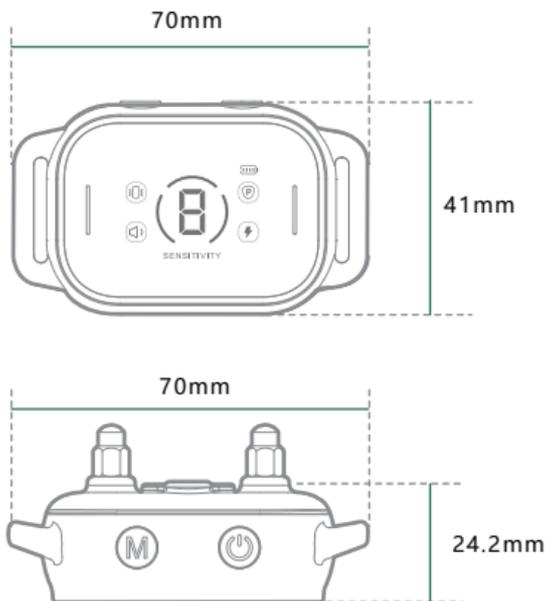

**This product is suitable for pets.**

The agency is not willing to harm or insult your pet. Using this product not in accordance with the instructions may violate local laws.