

Reolink Video Doorbell PoE

2K+ 5MP PoE Wired Video Doorbell with Chime

- Chime Included
- 2K+ (5MP) HD Video
- Person Detection

Specifications

Video & Audio	
Beeldsensor	1/2.7" CMOS Sensor
Videoresolutie	Default: 1920×2560 (5 megapixels) @20FPS
Lens	f=2.26mm F=2.0, with IR cut
Videoformat	H.264
Gezichtsveld	Horizontal: 100° Vertical: 135° Diagonal: 180°
Pre-Motion Recording	YES
Audio	Two-way audio, noise reduction, echo suppression
Quick Replies	YES
Stroom	
PoE	IEEE 802.3af, 48V Active
Hardwired	12 – 24VAC 50/60Hz, 24VDC
Interfaces	
Power	Power port

Systeem	Reset button
Ethernet	One 10M/100Mbps RJ45
Opslag	microSD card slot (Max. 256GB), works with Reolink NVR
Audio	Built-in two microphones & one speaker
Software	
Frame Rate	Mainstream: 2fps - 20fps (default: 20fps) Substream: 4fps - 15fps (default: 10fps)
Code Rate	Mainstream: 1024Kbps - 6144Kbps (default: 4096Kbps) Substream: 64Kbps - 512Kbps (default: 256Kbps)
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarm	Motion detection/person detection; visitor notification
Recording Modes	Motion recording (default); 24/7 recording; scheduled recording
Protocols & Standards	HTTPS, IPv4, UPNP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Work with	Google Assistant
Werkomgeving	
Temperature	Operating temperature: -10°C – +55°C (14°F–131°F)
Vochtigheid	Operating humidity: 10% – 90%
Weerbestendig	IP65
Afmetingen & Gewicht	
Afmeting	133mm (H) ×48mm (W) ×23mm (T)
Gewicht	96g
Garantie	


Beperkte garantie

2-year limited warranty. For support, visit <https://support.reolink.com/hc/en-us/>

Gallery & Specs



1. Lens
2. Microphone
3. IR LED
4. Daylight Sensor
5. Button
6. Doorbell Status Light
7. Chime Status Light

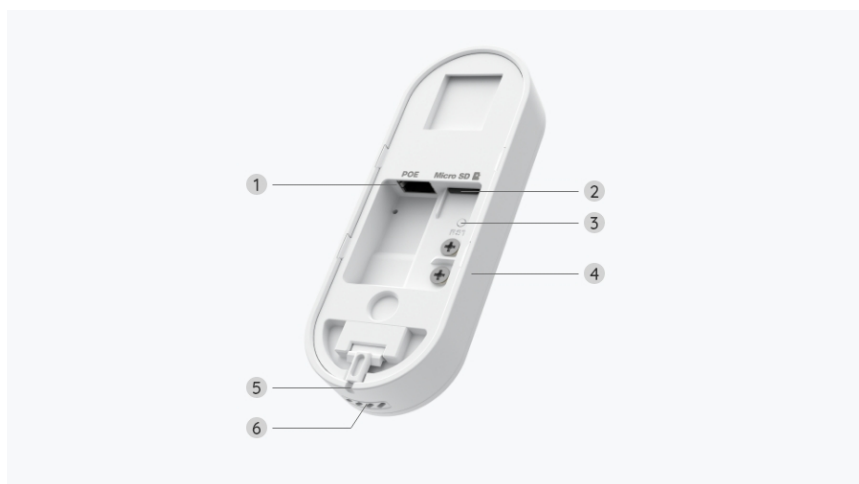

1. PoE Port
2. microSD Card Slot
3. Reset Button
4. Wiring Terminal
5. Pin Hole
6. Speakers



1. Lens
2. Microphone
3. IR LED
4. Daylight Sensor
5. Button
6. Doorbell Status Light
7. Chime Status Light



1. PoE Port
2. microSD Card Slot
3. Reset Button
4. Wiring Terminal
5. Pin Hole
6. Speakers

www.reolink.com