


Installation steps:

1. Make the decorative cover (2) and O-ring(3) across the thread pipe(5) and connect(5) with the bottom of the faucet.
2. Put the thread pipe(5) into the hole of the deck, fix it with O-ring (4) ,(6) and nut(7)
3. Screw the G1/2 cold and hot hose (10) with the faucet body and connect the opposite end to the water supply system .
4. Hang the weight ball(8) on the draw-tub(9)

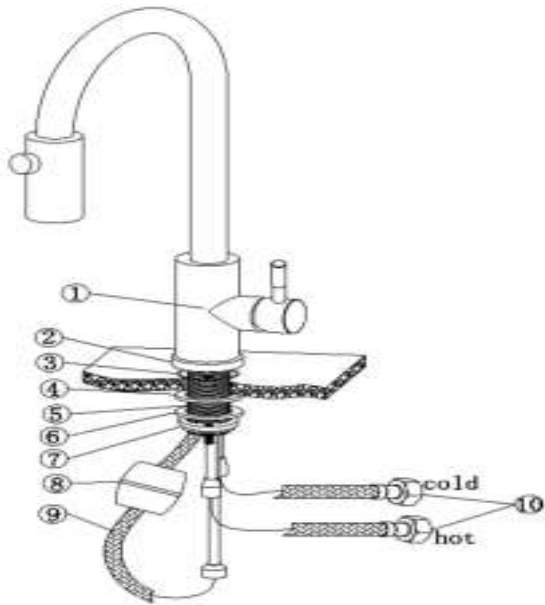

Specifications

Name	No.	Quantity
Decorative cover	2	1pcs
O-ring	3&4	2pcs
Stainless steel O-ring	6	1pcs
Nut	7	1pcs
Thread pipe	5	1pcs
Weight ball	8	1pcs
Draw-tub	9	1pcs
G1/2 cold and hot hose	10	1pair

Maintenance

- Use clean water to wash the faucet , and use a soft cloth or leather to wipe it.
- Do not use acidic washing liquid or abrasive materials to wash the faucet.