




Description

Non-shielded, classic Kimber Kable three wire braided copper interconnect will deliver deep, holographic imaging. Timbre's has a great ability to pop a central performer forward in the soundstage with clean and clear separation of instruments. Get a glimpse past the what and into the "why" on all your favorite albums.

[BUY NOW](#)

TIMBRE

Features

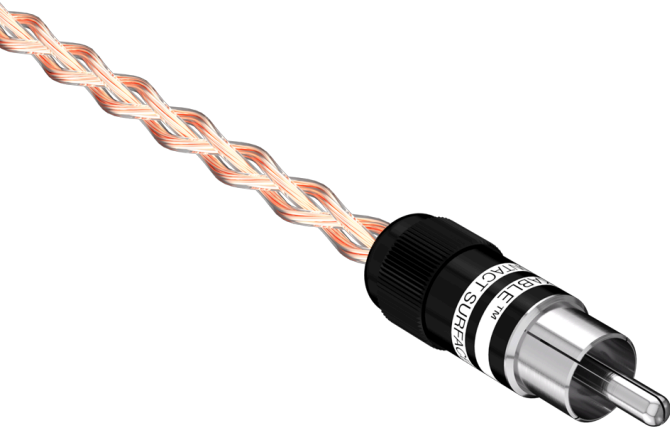

Low loss fluorocarbon dielectric



3 wire braid



VariStrand copper conductors



Nitrogen assisted hand soldered termination



Connector Options

Electrical Specifications

Black



Micro-D



WBT 0114Cu



XLR

(Cp) parallel capacitance: 62.1
pF / meter

(Ls) series inductance: 0.493 uH
/ meter


(Rdc) dc loop resistance: 0.057
Ohm / meter

Balanced

(Cp) parallel capacitance: 45.8
pF / meter

(Ls) series inductance: 1 uH /
meter

(Rdc) dc loop resistance: 0.0822
Ohm / meter

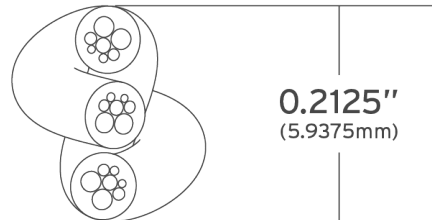

you@yours.com

SUBSCRIBE

Follow Us



Ik ben geen robot reCAPTCHA
Privacy - Voorwaarden


By clicking "subscribe" you agree to our [Privacy Policy](#) and allow Kimber Kable to contact you.

SELECT SERIES
BASE SERIES

CARBON
AXIOS

SUMMIT SERIES

ASCENT SERIES

 801-621-5530


info@kimber.com

2752 S. 1900 W. Ogden, Utah 84401 USA

USA SALES ONLY

© 2024 RKB Industrial Inc.