




Datenblatt - Fiche technique - Data sheet



**21.15.2612**

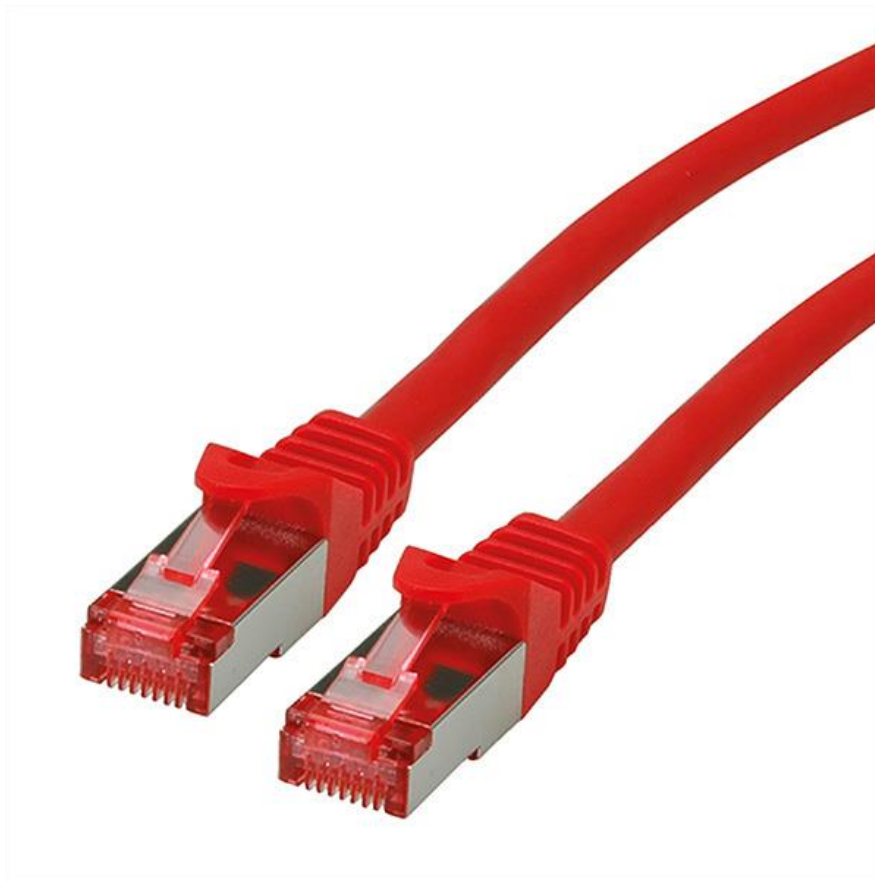

ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, rot, 2,0 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, rouge, 2,0 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, red, 2.0 m

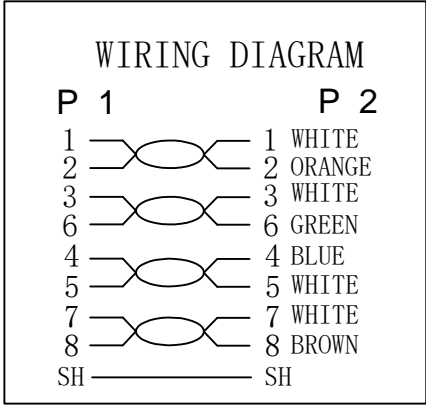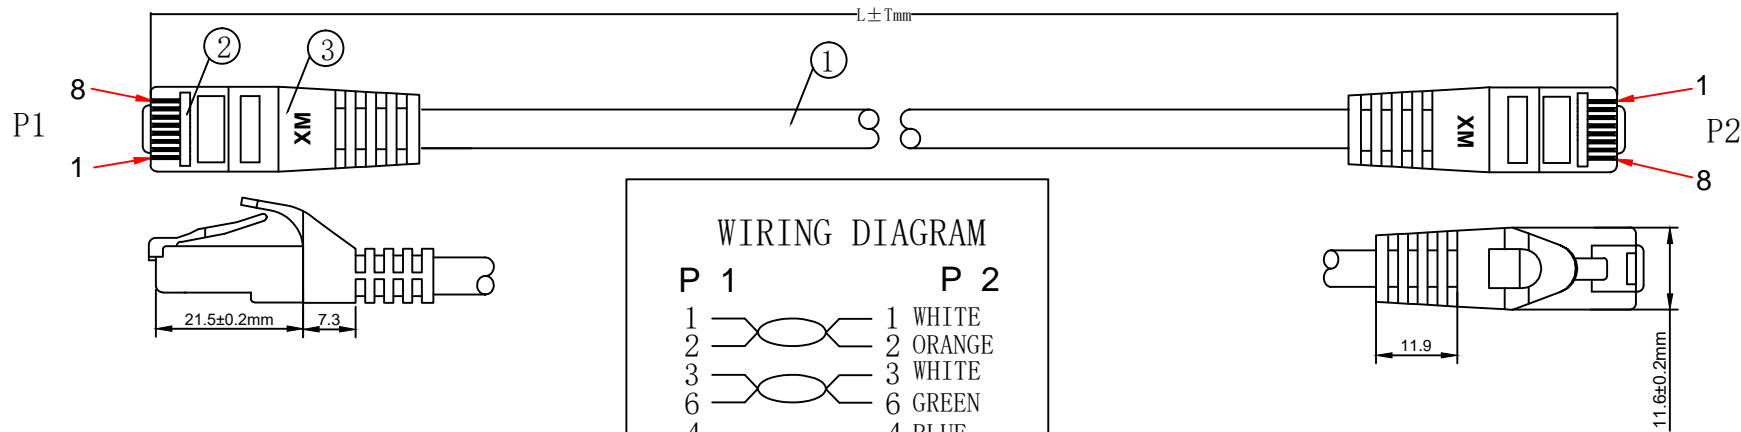

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:60mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Red	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR: Red (PANTONE: 199C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2952	300mm	± 10mm
21. 15. 2610	500mm	± 15mm
21. 15. 2611	1000mm	± 30mm
21. 15. 2614	1500mm	± 45mm
21. 15. 2612	2000mm	± 60mm
21. 15. 2613	3000mm	± 90mm
21. 15. 2615	5000mm	± 150mm
21. 15. 2616	7500mm	± 210mm
21. 15. 2617	10000mm	± 300mm
21. 15. 2618	15000mm	± 450mm
21. 15. 2619	20000mm	± 600mm

ITEM NO.	21. 15. 2952	21. 15. 2610	21. 15. 2611	21. 15. 2612	21. 15. 2613
21. 15. 2614	21. 15. 2615	21. 15. 2616	21. 15. 2617	21. 15. 2618	21. 15. 2619
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level, red				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

2016-10-20 A

**SECOMP**