


# PORTWEST

EN: Protection Against Harmful Noise  
 DE: Schutz gegen gesundheitsschädigende Geräusche  
 FR: Protection contre les bruits nuisibles  
 PL: Chroni przeciwdziałającym system  
 www.portwest.com

POUR EVITER TOUT DANGER D'EFFACEMENT NE L'UTILISEZ PAS ENSEMBLE  
 ACHTUNG  
 MOBILE VON BABYS UND KINDERN FERHILTEN, DA DIE GERÄUSCHE  
 OSTRZEZENIE  
 PARA EVITAR  
 AVISO  
 ATTENZIONE  
 FIGYELEM

## PORTWEST USER INFORMATION

**PW41**  
 Super Ear Protector  
 Col: Yellow

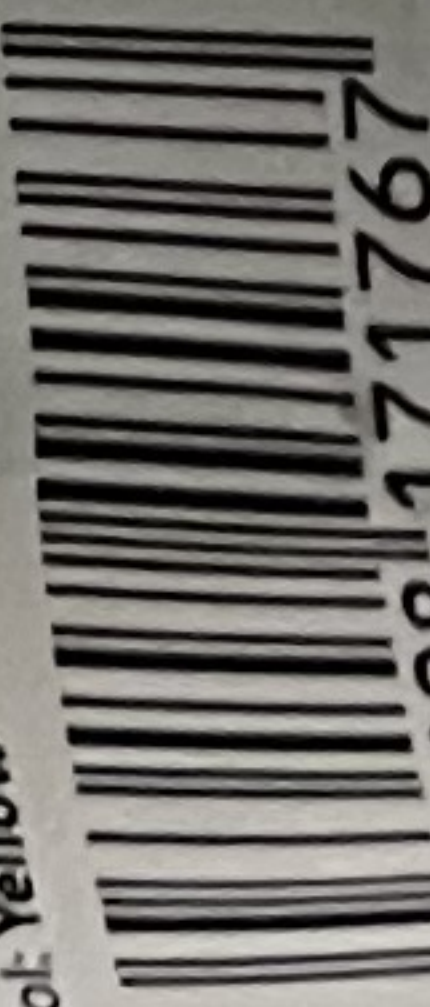

5 036108 171767

CE 2797  
 EN 352-1 Certified  
 SNR 30dB

ANSI S3.19 NRR 25dB  
 BSI CERTIFIED PRODUCT  
 AS/NZS 1270:2002  
 BMP NO. 6967/5  
 Australia/New Zealand Standards  
 INT 142343  
 MADE IN TAIWAN

LOT NO. PS0221APL

**Noise Reduction Rating 25 DECIBELS**  
 (WHEN USED AS DIRECTED)

THE RANGE OF NOISE REDUCTION RATINGS FOR EXISTING HEARING PROTECTORS IS APPROXIMATELY 0 TO 30 HIGHER NUMBERS DENOTE GREATER EFFECTIVENESS

Amest Clothing Ltd. Fashion and Business Wear  
 Remove South Islands  
 FEDERAL TRADE COMMISSION  
 MODEL PW41/PS41  
 LEVEL REQUIRED BY U.S. EPA REGULATION 40 CFR PART 211, Subpart E  
 Portwest, Co Mayo, Ireland

AUSTRALIAN and NEW ZEALAND STANDARD - AS/NZS 1270  
 REF STYLE: PW41/PS41

Hearing Protector class 5 tested to AS/NZS 1270:2002  
 multiple times as specified in AS/NZS 1270:2002 this product is suitable for use in a hearing protector class 5 environment  
 MUFFERS

ATTENUATION PERFORMANCE (IN DB)

FREQUENCY IN HERTZ	125	250	500	1000	2000	4000
MEANS	15.8	19.7	30.0	33.0	33.0	33.0
STD DEV	3.8	2.6	3.1	3.1	3.1	3.1
MEAN - SD	11.6	17.1	27.0	30.0	30.0	30.0

SIC(80) = 30dB (ROUND)

Clamping force (and measurement) PW41/PS41  
 Mass of the hearing protector is in good conditions  
 Refer to AS/NZS 1269