


1 2 3 4 5 6

Total length (optional)

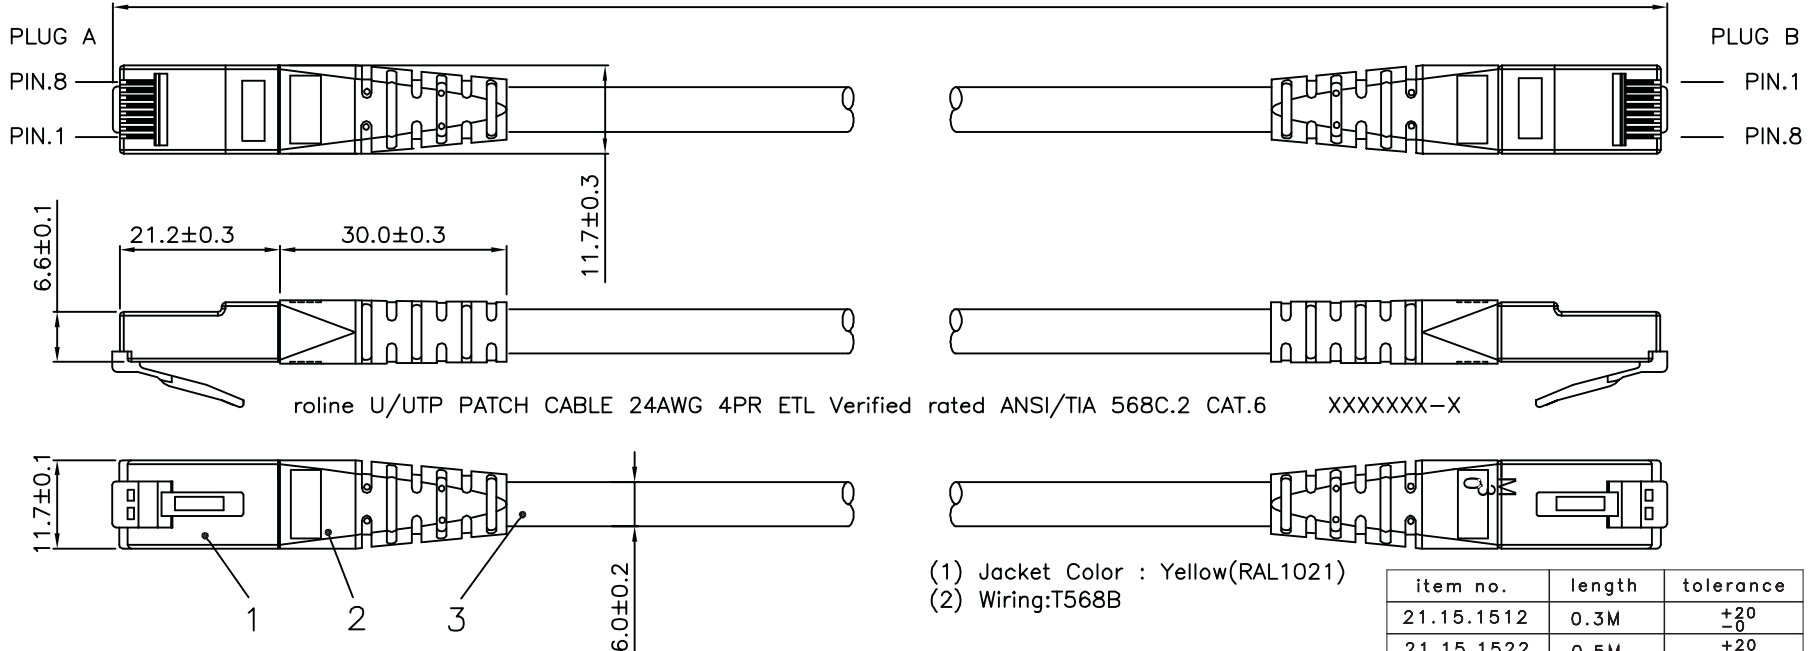

roline U/UTP PATCH CABLE 24AWG 4PR ETL Verified rated ANSI/TIA 568C.2 CAT.6 XXXXXX-X

- (1) Jacket Color : Yellow(RAL1021)
- (2) Wiring:T568B

| item no. | length | tolerance |
|------------|--------|------------|
| 21.15.1512 | 0.3M | +20 -0 |
| 21.15.1522 | 0.5M | +20 -0 |
| 21.15.1532 | 1M | +20 -0 |
| 21.15.0925 | 1.5M | +20 -0 |
| 21.15.1542 | 2M | +20 -10 |
| 21.15.1552 | 3M | +20 -10 |
| 21.15.1562 | 5M | +30 -20 |
| 21.15.1572 | 7M | +30 -20 |
| 21.15.1582 | 10M | +30 -20 |
| 21.15.1592 | 15M | +30 -20 |
| 21.15.1602 | 20M | +70 -30 |

Specification :

- Material :
1. RJ45 Plug :
 - 1-1. Housing : Polycarbonate, Transparent color.
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated.
 2. Molding: PVC.
 3. Cable :
 - 3-1. Jacket : PVC.
 - 3-2. Conductor : 24 AWG stranded copper.
 - 3-3. Isolation : PE.
 - 3-4. Isolation Cross Bar for 4 pairs : PE.
 4. Cable structure : U/UTP, 4 twisted pair with Cross Bar.
 5. Minimum Bending Radius: 50mm

| | | | | | |
|---------------------------------|---------------------------------------|-------------|------------------------|------------|------------|
| item no | 21.15.1512 | 21.15.1522 | 21.15.1532 | 21.15.0925 | 21.15.1542 |
| | 21.15.1552 | 21.15.1562 | 21.15.1572 | 21.15.1582 | 21.15.1602 |
| Desc | ROLINE Cat 6 U/UTP Patch Cord, Yellow | | | | |
| "#": Matching DIM. | DRAWING | 23.JuL.2016 | byz | | |
| "*": Important DIM. | CHECK | 23.JuL.2016 | Jane | | |
| Others General DIM. | APPROVAL | 23.JuL.2016 | Jaimy | | |
| GENERAL TOLERANCE OF DIMENSIONS | | DATE | NAME | | |
| X.XXX ±0.005 | SCALE | 1/1 (A4) | UNIT | mm | |
| X.XX ±0.05 | | | DRAWING NO. | | |
| X.X ±0.1 | | | DRAWING CLASSIFICATION | | S |
| | | | | 1 OF 1 | |

| No. | MODIFIED AREA | ORIGINAL | MODIFY | DATE | MODIFIER |
|-----|---------------|----------|--------|------|----------|
| | | | | | |