


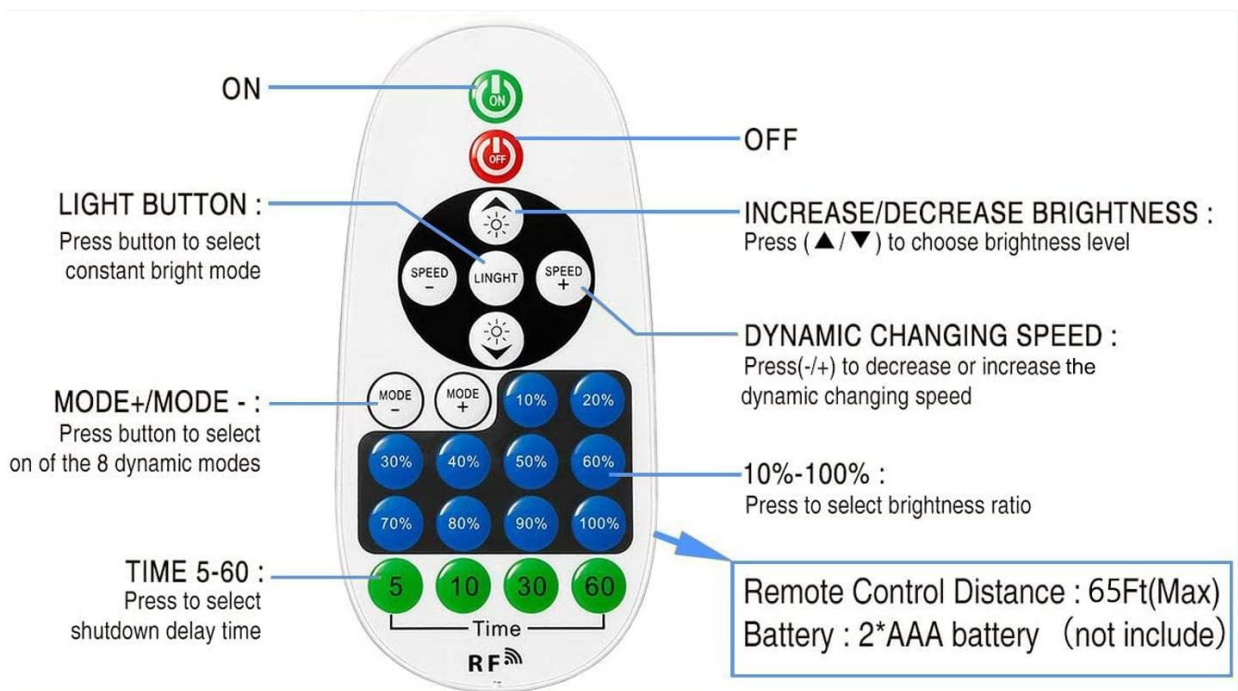
OZOCOZY

RF high voltage 23key Dimmer

This product use RF wireless remote control, can adjust the brightness of the remote control, can set the delay shutdown, with memory cut function, no need to setting so often. This product is suitable for all kinds of high voltage LED single color strip and rainbow tube.

➤ Related parameters:

Specification		Function mode list
Working voltage:	AC230V	1.ON/OFF: power on / off.
Output control:	1 CH	2.SPEED-/SPEED+: dynamic speed adjustment.
Control current:	9A	3.LINGHT: Maximum brightness
The maximum output power:	230V:1500 w	4.  : brightness adjustment.
Connection method:	common anode	5.MODE+/MODE-: 8 dynamic modes selection.
Radio frequency:	RF433M HZ	6.10%-100%: brightness ratio selection.
Receiving range:	65 FT	7.Time 5-60 delay shutdown time selection.
Working temperature:	- 40 °C to 60 °C	
Dimension:	L90*W70*H28mm	
IP Rate:	Waterproof IP65	



➤ Instruction

1. Put the strip plug insert the controller output socket , controller and strip of positive and negative very counterpart, pay attention to check the strip pin position whether there is a short-circuit, if there is a short circuit phenomenon please handle again, otherwise it will damage the controller and strip.
2. Power plug power on, operate the remote control can be carried out in accordance with the needs of the controller to work.