

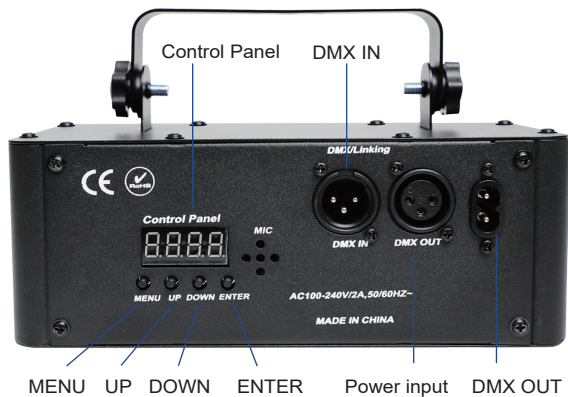


21 Eyes Strobe Laser Party Light

Product Manual

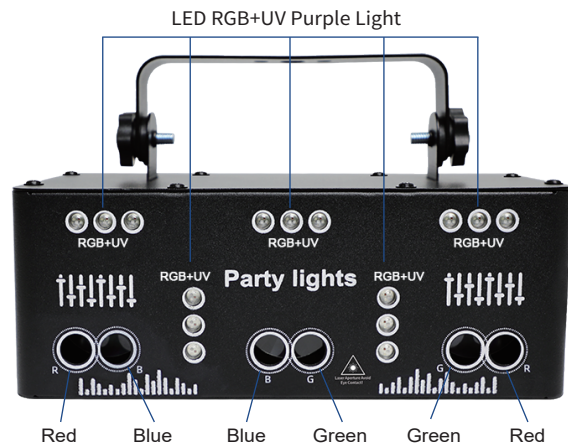

Remote Control

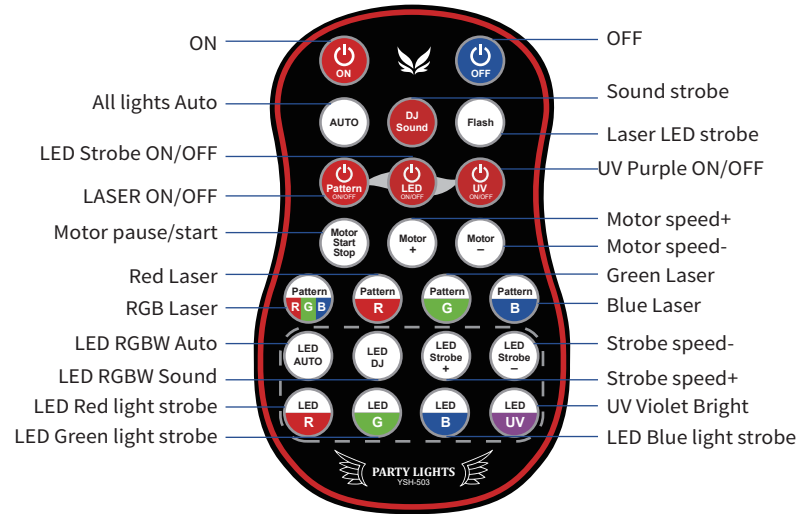

Technical Specification

*Feature:

- (1) Built-in many kinds of nice amazing effects
- (2) Four working modes: AUTO, Sound Flash, DMX512, Master/Slave
- (3) Under DMX mode, user can set light ON/OFF, output lens selection with adjustable speed, flash output lens selection with adjustable speed, spin direction with adjustable speed.

*LCD display with 4 digital button: Mode, UP, DOWN, ENTER

*Beam angle: 150 degrees

*Scanning system: stepper motor scanning

*DMX Channel: 7CH


*Net Weight: 1.1Kg

*Interface: 3 pins XLR jack for DMX or Master-Slave linking

*Power Supply: Bi-Voltage 110V to 220V-250V, 50/60HZ, Power 15W

*Applicable Place: DJ, Bands, Bars, Pubs, Clubs, KTV, Family party, etc.

LCD Digital Display



MENU: Function mode selection, such as DMX512 / master-slave, Automatic stroboscopic, voice-controlled stroboscopic, constant light, brightness adjustment

UP/DOWN: Previous or next, increase or decrease

ENTER: Confirm and save

Display menu:

DEFN	LIG1 (1R00 - 1R01)
	LIG2 (2R00 - 2R01)
	LIG3 (1G00 - 1G01)
	LIG4 (1B00 - 1B01)
	MOTO (1M00 - 1M99)
	UU (UU00 - UU99)
	RED (R000 - R099)
	GREE (G000 - G099)
	BLUE (B000 - B099)
	STRB (SH01 - SH99)
AUTO	PA01 - PA99
LED Gradual change	PJ01 - PJ99
AUTO Flash	PF00 - PF99
Laser AUTO	PC00 - PC99
LED AUTO	PL00 - PL99
DJ Sound	DJ00 - DJ99
LED DJ Sound	DE00 - DE99
DMX ADDRESS(CH11)	R001 - R512

DMX512 Channel

Mode(CH11)	Channel	Description
1	Special channel	000-030 NO 031-070 AUTO 071-110 LED Gradual change 111-150 Flash AUTO 151-190 DJ Sound 191-230 LED DJ Sound 231-255 NO
2	Red laser 1	000-255
3	Red laser 2	000-255
4	Green laser	000-255
5	Blue laser	000-255
6	Motor speed	000-255
7	UV	000-255
8	LED Red	000-255
9	LED Green	000-255
10	LED Blue	000-255
11	Flash	000-000 OFF 001-004 ON 005-029 Random flash 030-255 Flash speed slow to fast