

English

Product features:

New Alliance (308-RB-68) RGB wireless Bluetooth three-mode mechanical keyboard, is the use of Bluetooth+2.4G+ wired three modes of operation and related devices connected to control, products can run on the computer Windows 2000, Windows XP, Vista, Win7, Win8, Win10, and bluetooth version of the mobile phone system.

Hardware requirements:

Hardware Requirements: A phone or computer with Bluetooth and a USB port available to connect the device.

Wireless Bluetooth keyboard installation:

III-6.3.3.2 Bluetooth Key Board Installation:
1. Keyboard Bluetooth connection to the code installation steps, and user press FN+Q=BT1, FN+V=BT2, FN+E=BT3 key combination is the keyboard Bluetooth broadcast code key, when you want to use the keyboard's Bluetooth channel, the keyboard's power switch hit the ON position, and then press
and hold FN+Q=BT1, Bluetooth broadcast key, when the keyboard Bluetooth code lamp will flash purple light, when the Bluetooth code is connected when the light is bright purple, such as press FN+V=BT2 Bluetooth broadcast key, Keyboard Bluetooth code lamp will flash cyan light, when Bluetooth code is connected to the light long bright cyan; when pressing the FN+E=BT3 Bluetooth broadcast key, keyboard Bluetooth code-to-code lamp will flash yellow light, when Bluetooth code-to-code good when the lamp is long bright yellow, the product uses three Bluetooth-to-connection methods to intelligently identify Bluetooth 3.0, 4.0, 5.0, or 5.1 connection, excellent. For example, when you connect three devices and USB port, when


communication, for example: when using on the computer Win7 , you should first click on the computer "start" to select the "control panel" and then click "add device" when the computer will appear to add device interface, then according to the keyboard F11+ST1,BT2,BT3 code broadcast, when the computer interface appears Bluetooth keyboard icon, then click on the "Bluetooth keyboard icon" to select "add device" to follow the prompt, that computer can be connected to the keyboard Bluetooth . Installation steps on the computer Win7-10: On the computer point "start" selected "device" selected "Bluetooth" and then it in the list selected "keyboard icon" port pairing interface dialogue operation can be completed. Some computers will appear Bluetooth icon, then directly click on the icon in its display menu bar to choose "Show Bluetooth device" when the computer will appear to install the device interface, in the interface click to selected "add device" according to the prompt action, that computer can also be connected with the keyboard BT switch.

2. keyboard 2x4G wireless installation steps and use: keyboard can also be equipped with a receiver with a computer connection, in the power state of the keyboard long press and hold FN+Fn+2x4G key, when the keyboard code lamp will flash red lights, then the receiver plug into the computer ide USB port, when the computer will automatically code and install the corresponding adaptation software, the general computer will prompt; The installation is complete and ready to use. At this time the keyboard code lamp will become long and bright red, which indicates that the keyboard and computer code successfully connected.

3. Keyboard wired installation steps and user: keyboard can also be equipped with TYPE-C cable with the computer connection, in the state of plug-in cable, press the keyboard FN+T+One key, when the keyboard code lamp will be bright (green light), and then will automatically connect with the computer to complete and can be used. At this time, the keyboard code lamp also has bright green, which indicates that the keyboard and computer TYPE-C line connection successfully can be used.

3, the first use of the new Allion wireless products, it is recommended to use the product with a charging cable to connect the computer USB port or DC-5V charger to fully charge the keyboard before using. Watch the direction of the cable TY-PE-C Head carefully inserted into the charging stand of the keyboard while charging. The light inside the keyboard lights up green when plugged in, and the mode light is a mix of the green light and the mode light when fully charged. When fully charged, the green light goes out and the light returns to a single mode light.

4, the new Allbase wireless Bluetooth-FCC keyboard with 62 keys with FN key function, two-color molding design, greatly increased the keyboard's light transmission and durability, beautiful design, when the wireless keyboard is stationary do not need 2-3 minutes or so, the keyboard will automatically turn off the backlight, then press any key its response light.

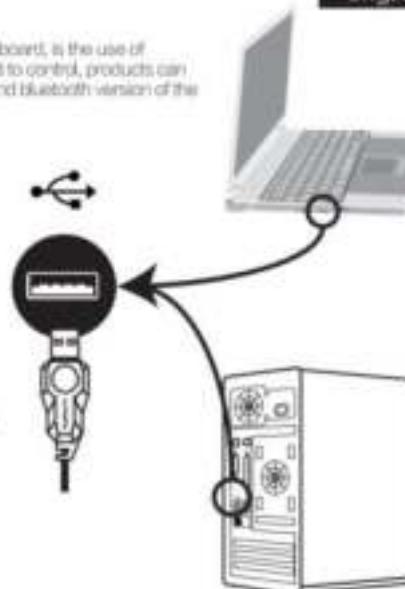

Instructions for operation:

Fn+1>switching light mode (one-time-one-click light switch), Fn+1+2>Light brightness tunes, Fn+1+3>Return to initial mode (FastDuo) Change the color of the light

FN function key

FN+1=F1 FN+3=F3 FN+5=F5 FN+7=F7 FN+9=F9 FN+(−)=F11
FN+2=F2 FN+4=F4 FN+6=F6 FN+8=F8 FN+0=F10 FN+(+)=F12
FN+L-WIN=Lock the WIN key (Press again to unlock)

Multimedia key control method:

PN+AL158-1=screen.brightness.menus
PN+AL158-2=screen.brightness.plus
PN+AL158-3=Email
PN+AL158-4=Computer
PN+AL158-5=Search
PN+AL158-6=Music
PN+AL158-7=Previous Song
PN+AL158-8=Play/Pause
PN+AL158-9=Next Song
PN+AL158-10=Volume Reduction
PN+AL158-11=Volume plus

Note:

1. wireless keyboard has intelligent power saving function: when the keyboard is stationary do not use 2-3 minutes or so, the keyboard will automatically turn off the backlight, which is to press any key to restore light.

2, when plugged in the receiver, the computer can not recognize the use, should consider the port contact caused by poor, need to replace plugged into another computer USB port to use. When the keyboard backlight dimmed or the product is not used properly should be the product built-in power shortage, to timely charging, charging time will be with the charger power size of the time will be short. If the product is not used for a long time, please set the product power switch to the OFF position.

3, when the product in use of certain or suddenly do not move, in addition to excluding the reason for low battery voltage, should be the environment has the same signal interference caused, then the computer can be connected with TYPE-C cable 24G re-code solution, code method as shown above (one line-on-the-code can be repeated operation). Can also press the FN+Q, FN+W, FN+E, FN+R/FN+T keys for mode switching, such as the above method can not be resolved, please call the new alliance service hotlines: 400-006-1958 in sales.

4. the new alliance wireless-products are built-in lithium-design, keyboard use (-10-55°C and 15%-95% humidity, no specific computer is subject to failure) so for the safety of users, products can only be used at room temperature or please do not use at high temperatures or near the source of heat.

5. Product damage disposal: If the product damage can not be repaired, do not self-disassembly or throw into the fire, so as to avoid accidental damage. The professional waste disposal stations or special recycling bins should be used for disposal.

List of items

1. Type-C charging cable one 2. manual/warranty card one 3.2.4G receiver one