




# How to jump-start a car with jumper leads?

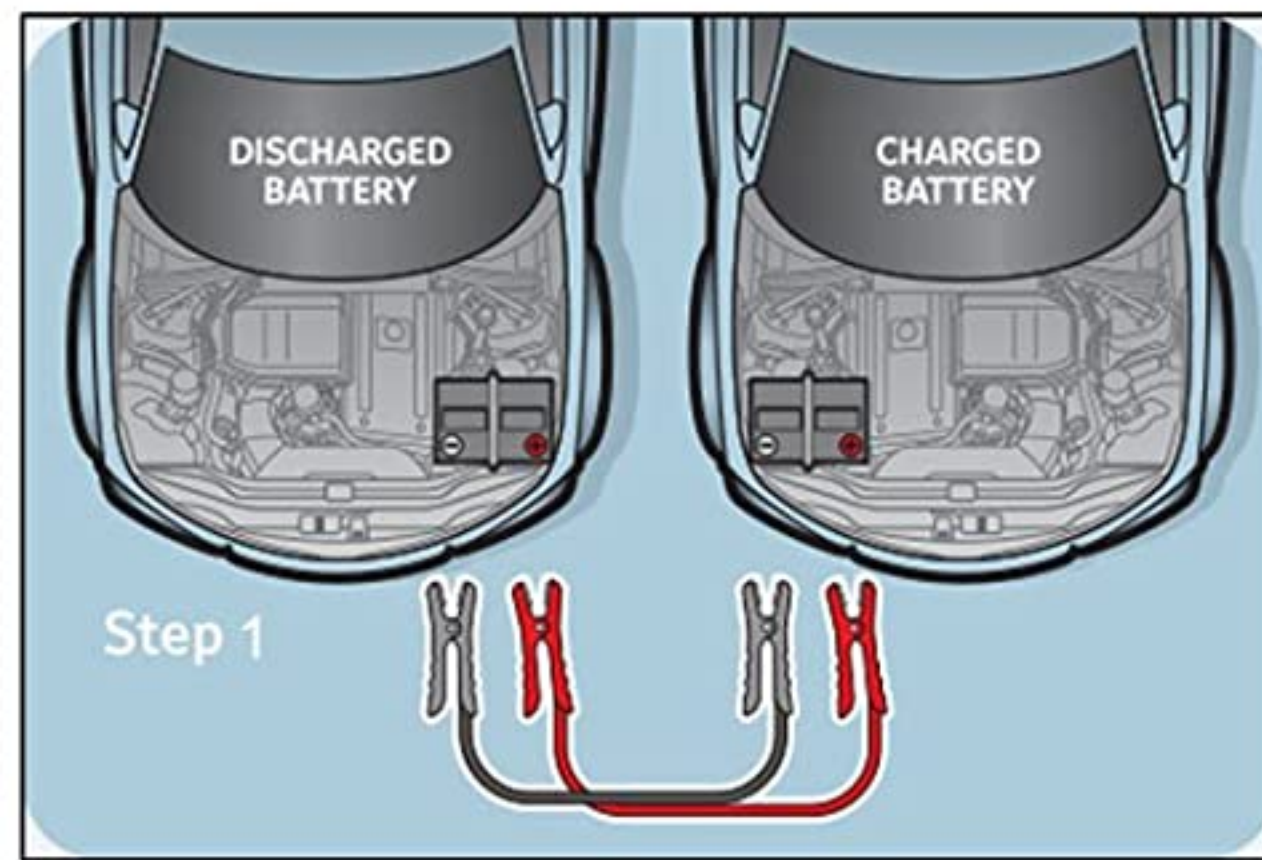


1. Park both vehicles next to each other but do not touching. Make sure they are turned off.

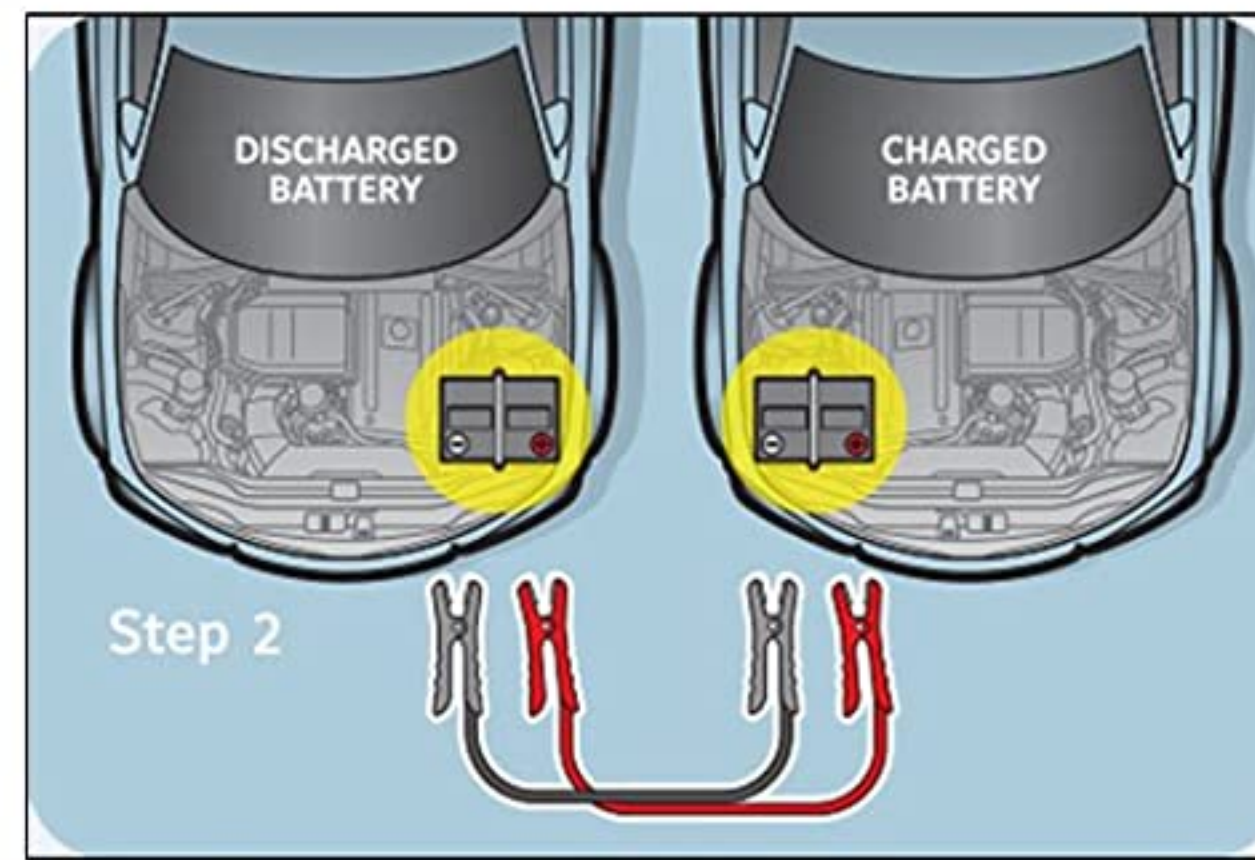


2. Find the batteries and their terminals

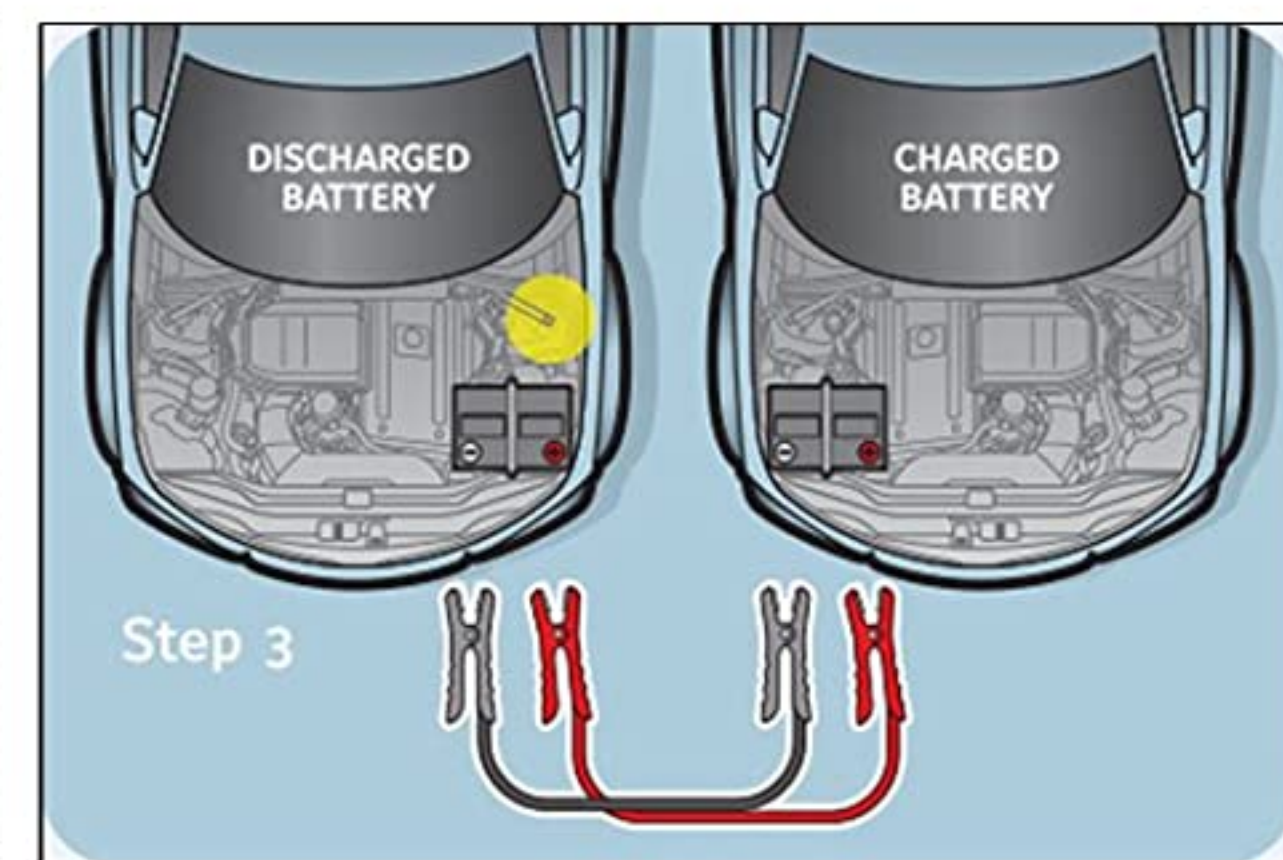


3. Identify the frame bumper or engine block of the dead battery

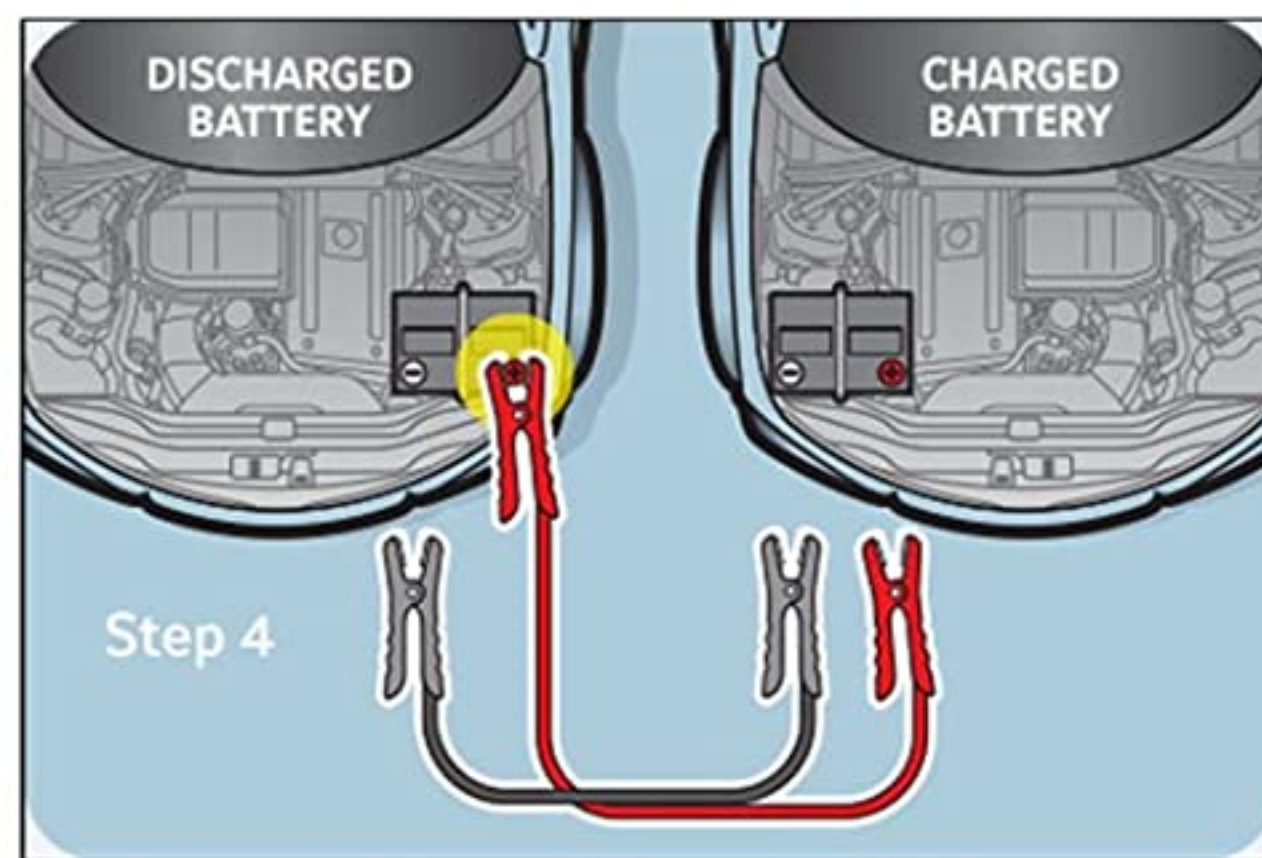


4. Connect one red clamp to the positive(+) terminal of the dead battery

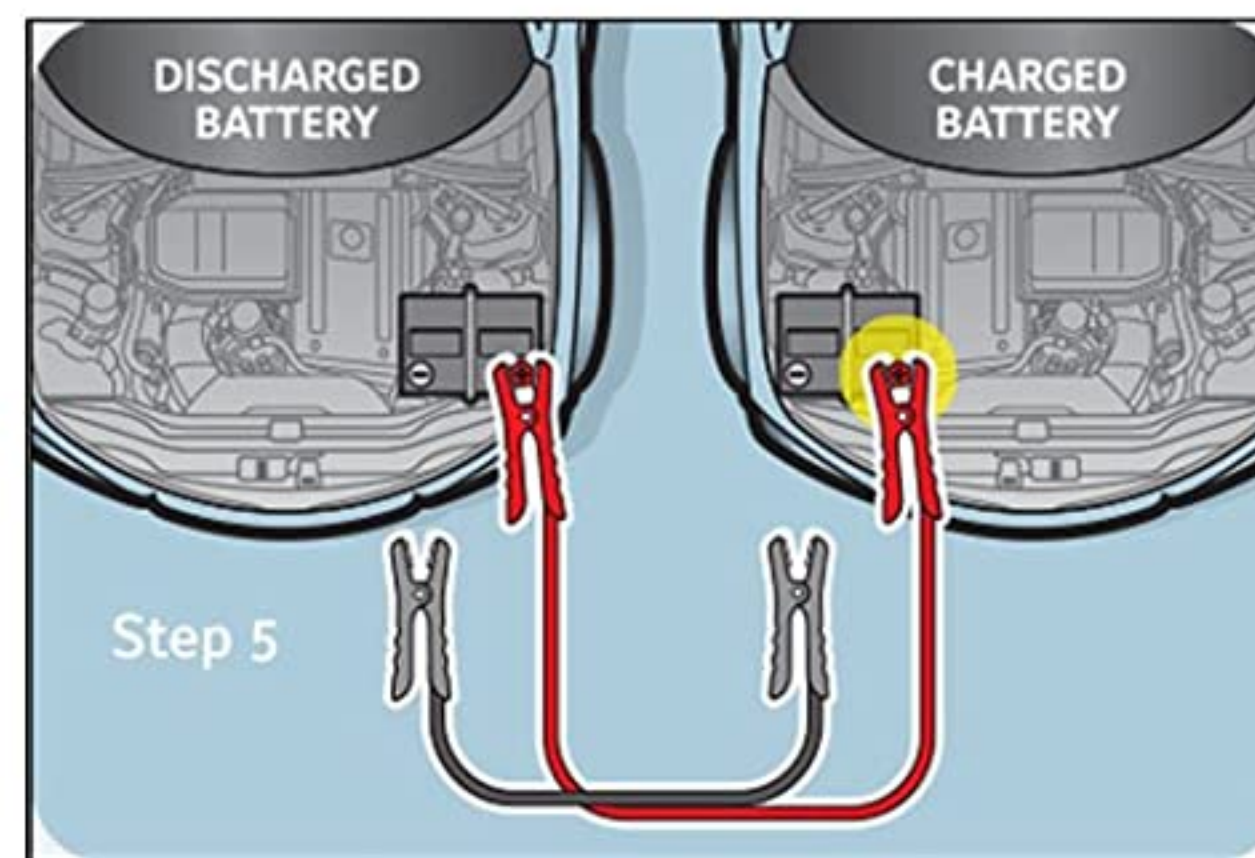

5. Connect another red clamp to the positive terminal of the charged battery

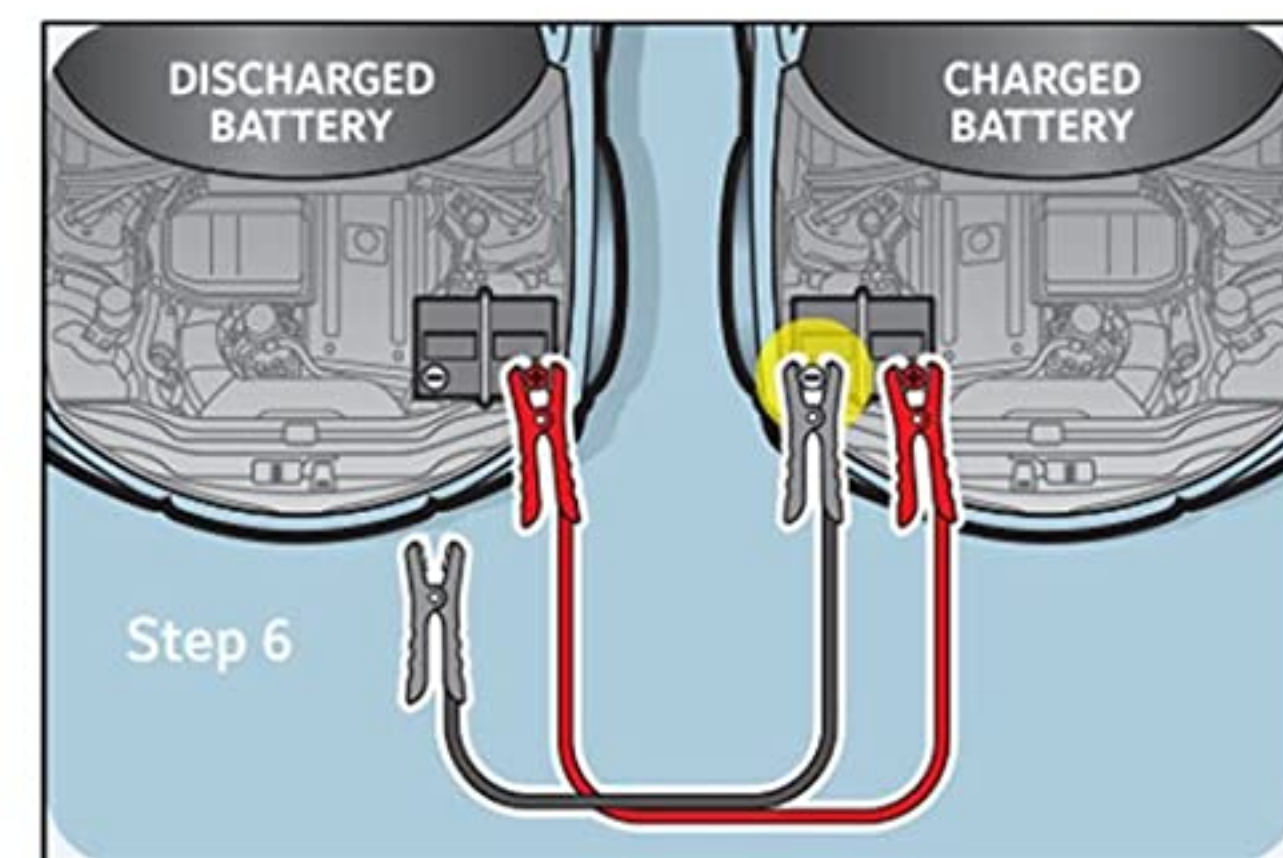

6. Connect one black clamp to the negative(-) terminal of the charged battery

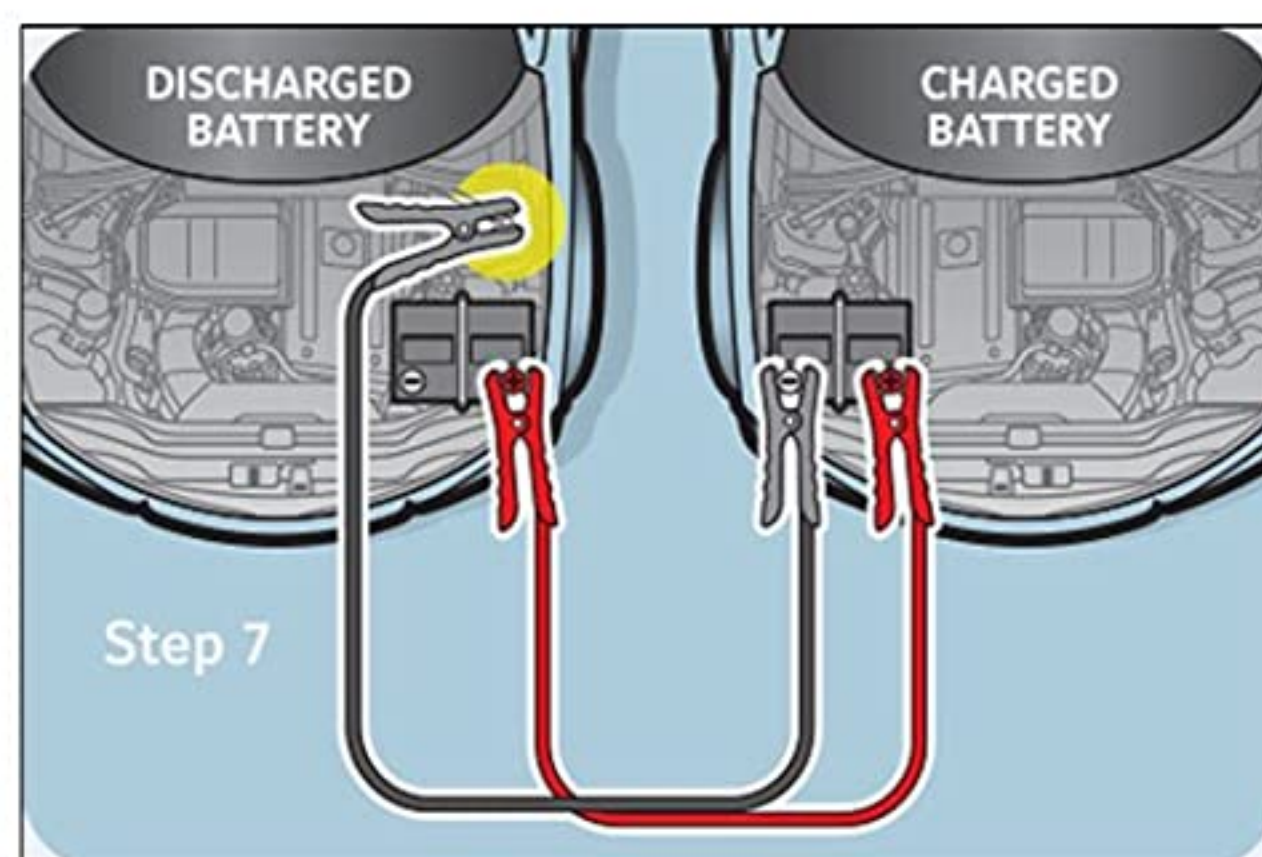

7. Connect another black clamp to the frame bumper or engine block of the dead battery



8. Start the working vehicle. Wait 1-2 minutes and start the dead vehicle, then keep the vehicle running for few minutes for recharging the battery.

9. If the vehicle starts, disconnect the cable clamps in the reverse order. If the vehicle doesn't start, wait a few moments and repeat Step 8.