

SPECIFICATIONS

Frequency	2.4GHz FHSS
Type of Modulation	GFSK
Data Rate	4 Mbps
Channel bandwidth	3.3758 MHz
Transmission Range	Up to 960 feet / 300 meters(Open space - No obstructions)
Input Voltage	5V, 1A
Power adapter	Input:100-240VAC 50/60Hz
LCD screen	5" HD TFT LCD (1280*720 Pixels)
Rechargeable battery	Model:YB905560 3.7V, 4000mAh
Transmition Power	18dB
Image sensor type	1/4" Color CMOS
IR LED Type	940 nm
Operating Environment	Indoor use only; Temperature:32-104 °F / 0-40 °C; Humidity:5%-90%rh (relative humidity)




QUICK START GUIDE

1. Fully charge the parent unit with the power adapter provided;
2. Use the provided AC adapter to connect the baby unit to a wall outlet.
3. Turn on the parent unit by pressing and holding the power key;
4. Pair the parent unit and the baby unit by long press the "Pair" button at the back of the baby unit.

WHAT INCLUDED

1x Baby Unit	2x Power Adapter
1x Baby Unit Adapter	1x User Manual
1x Wall mount shim	

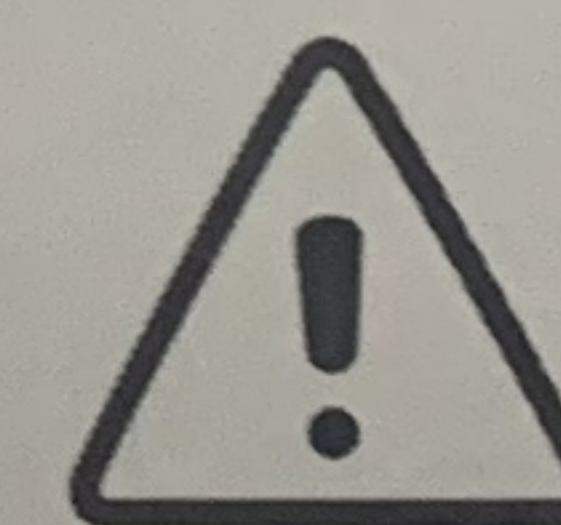

WARNING



STRANGULATION HAZARD — Children have STRANGLED in cords. Keep this cord out of reach of children (more than 3 feet/1 meter away from this crib). Never use extension cords with AC adapters. Only use the AC Adapters provided



Made in China