
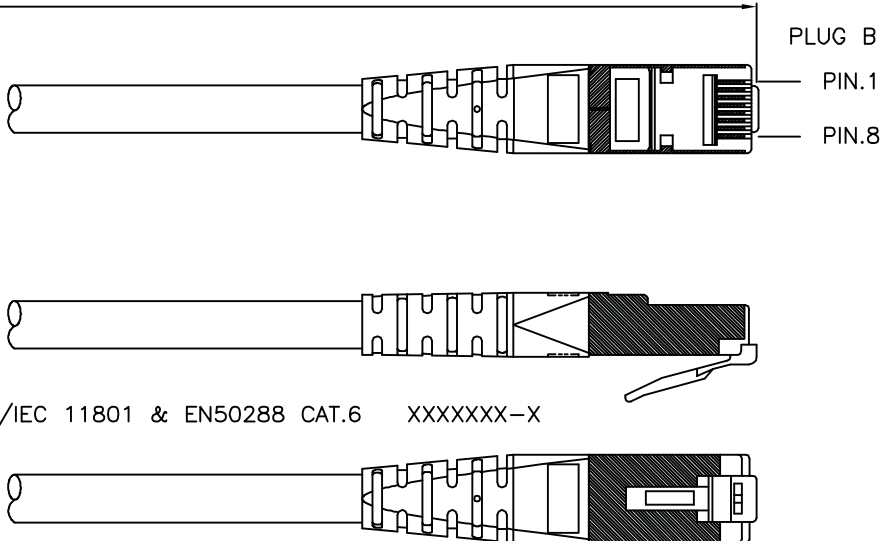


1 2 3 4 5 6

Total length (optional)

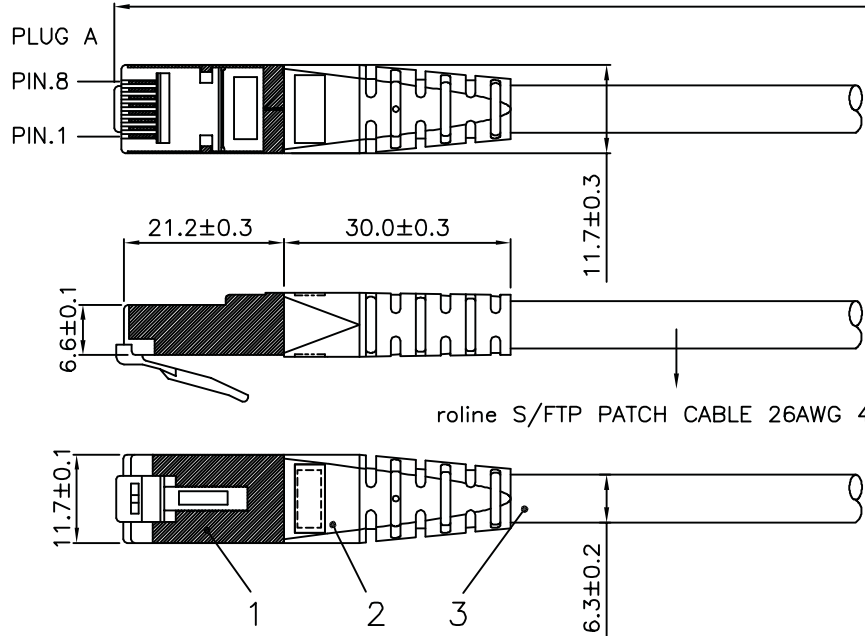

roline S/FTP PATCH CABLE 26AWG 4PR ISO/IEC 11801 & EN50288 CAT.6 XXXXXXXX-X

- (1) Jacket Color : Gray(RAL7035)
- (2) Wiring:T568B

item no.	length	tolerance
21.15.1310	0.3M	+20 -0
21.15.0830	0.5M	+20 -0
21.15.0831	1M	+20 -0
21.15.0823	1.5M	+20 -0
21.15.0832	2M	+20 -10
21.15.0833	3M	+20 -10
21.15.0835	5M	+30 -20
21.15.0837	7M	+30 -20
21.15.0840	10M	+30 -20
21.15.0845	15M	+30 -20
21.15.0850	20M	+70 -30

Specification :

Material :

- RJ45 Plug :
 - Housing : Polycarbonate,Transparent color.
 - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
 - Shield : Bronze with Nickel plated.
- Molding : PVC.
- Cable :
 - Jacket : PVC.
 - Conductor : 26 AWG stranded copper.
 - Isolation : PE.
 - Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
- Cable structure : S/FTP, 4 twisted pair.
- Minimum Bending Radius: 50mm

item no	21.15.1310	21.15.0830	21.15.0831	21.15.0823	21.15.0832
21.15.0833	21.15.0835	21.15.0837	21.15.0840	21.15.0845	21.15.0850

Desc		ROLINE Cat 6 S/FTP Patch Cord,Gray			
"#": Matching DIM.	DRAWING	23.JuL.2016	byz	SECOMP	
"*": Important DIM.	CHECK	23.JuL.2016	Jane		
Others General DIM.	APPROVAL	23.JuL.2016	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS		DATE	NAME		
X.XXX ±0.005	SCALE	1/1 (A4)	UNIT	mm	
X.XX ±0.05	DRAWING NO.				
X.X ±0.1	DRAWING CLASSIFICATION		S	SHEET	1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER