
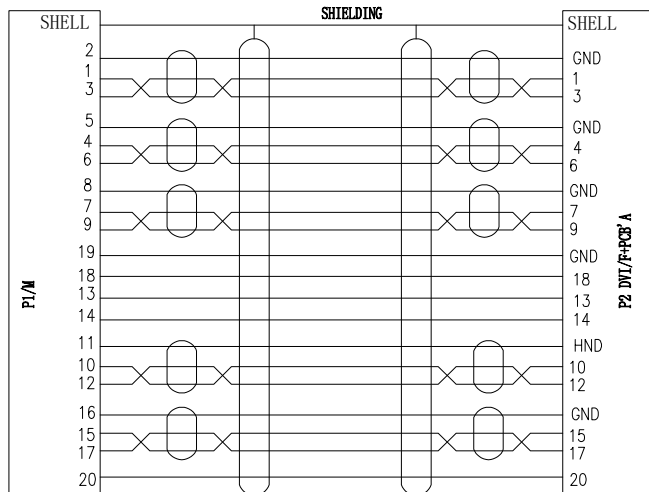


**ELECTRICAL TEST:**

- 1.100% OPEN SHORT MIS WIRE TEST
- 2.CONTACT RESISTANCE:3 OHM MAX
- 3.INSULATION RESISTANCE:5M OHM MIN
- 4.HI-POT TEST:DC 300V/10ms
- 5.PASS 1080P TEST

CONSUMER ITEM	LENGTH(mm)
AC7510	150±20

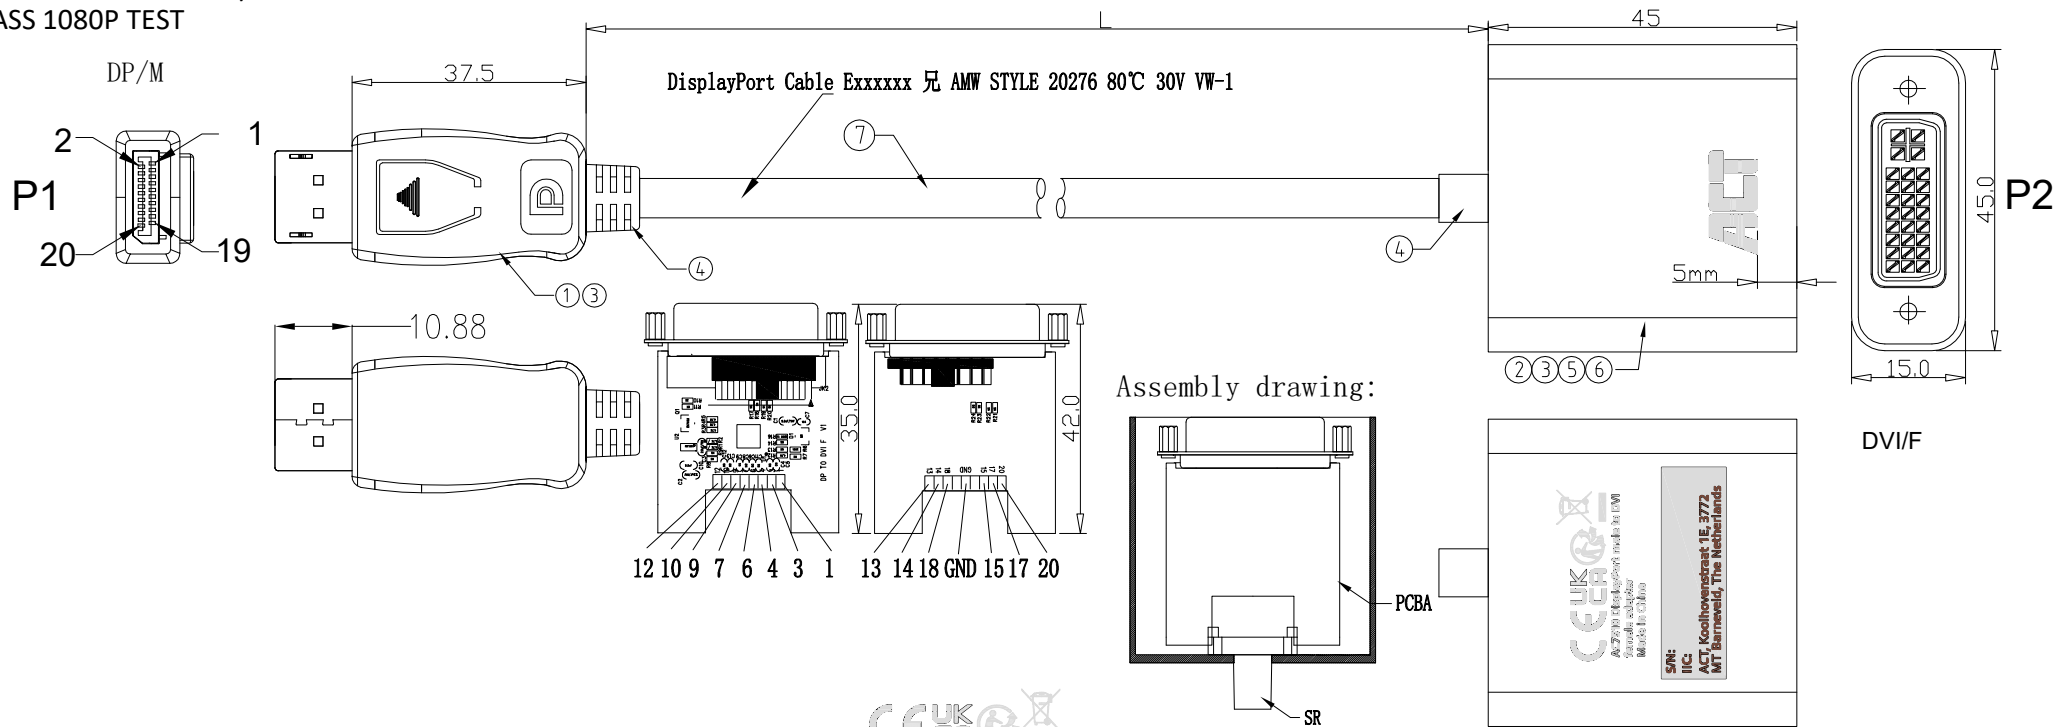

**ACT**

Silk:Pantone Cool Gray 6C  
13mm\*6mm

**CEUK**  
AC7510 DisplayPort male to DVI female adapter  
Made in China

Silk: Pantone Cool Gray 11C  
24,1mm x 12,8mm

S/N:  
IIC:  
ACT, Koolhovenstraat 1E, 3772 MT Barneveld, The Netherlands

Bottomlabel: Pantone 429  
30mm x 9,1mm

⑦	Cable	UL20276 #32*5P+#32*5C+AEB, 黑色 PVC JACKET, OD:5.0mm	M
⑥	SHELL	DVI/F BLACK PVC SHELL	1PCS
⑤	SHELL	DVI/F BLACK PVC FRONT COVER SHELL	1PCS
④	outer molding	BLACK PVC 45P	20g
③	inner molding	PE,Nature color	10g
②	PLUG	DVI (24+5)/F:PIN G/F, White PVC CORE, Nickel plating +PCB'A (PS8121E)	1PCS
①	PLUG	DP 20P/M:PIN G/F, BLACK PVC CORE, Nickel plating WITH LOCK	1PCS
NO.	PART NAME	DESCRIPTION	UNIT

				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
				MODEL NO.	AP-023A	△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.	153-209	△	2021/11/30		A2
		YAN	YAN	FINISHING		△	2020/11/06		A1
				MATERIAL		SYM	DATE		REVISION