

Multi-Function Jump Starter

Jump Starting/Digital Products Charging/LED Lighting/sos

User Manual

OWNER'S MANUAL

Thank you for purchasing our product. This manual will explain the features, proper operating procedures, safety warnings, and other useful information.

Indicator light

Press the power switch, the power indicator light will show as follows:

| Indicator Light | One Light On | Two Lights On | Three Lights On | Four Lights On |
|-----------------|--------------|---------------|-----------------|----------------|
| capacity | 25% | 50% | 75% | 100% |

During the charging of the product, the power indicator lights will flash and turn on one by one, and the number of the bright indicator lights stands for the real power capacity. When four lights are all on, it means the charging process is completed.

Besides, during the discharging of the product, if the first indicator is flashing, it means the shortage of power.

Different Modes Of LED Lights

Press the power switch 3 seconds to light up the LED light:

LED lighting Press LED Flashing press Turn off

Operation

Charge For The Device

1. Plug the AC adapter to the AC electrical socket;
2. Insert the adapter plug into the DC input port of the device.

Or

1. Insert the car charger into the car cigar port;
2. Insert the other end of the car charger to the DC input port of the device

Start 12V Car

1. Make sure two or more power indicator lights are on;
2. Connect the red battery clip to the battery positive pole(+) and black clip to the battery negative pole(-);
3. Insert the battery clips plug into the "car jump port" of the device;
4. Start the car;
5. Pull out the battery clip plug from the "car jump port" of the device;
6. Disconnect the red and black battery clip from the battery positive and negative poles.

Recommended Vehicle Engine Displacements for Jump Starting;

1. Red and black clamps are connected to the car battery positive and negative.




2. Plug into the corresponding holes of the jump starter.



3. Take out the jump starter clamps immediately after jump starting the car

4. Remove the clamps from the car battery.

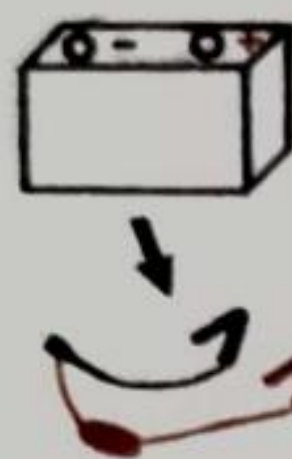

Warning Do

not touch the red and black or connect both to the same piece of metal to prevent physical injury and damage to the vehicle.

Do not use the jump start cable for any other purpose.

KEEP AWAY FROM CHILDREN AT ALL TIMES!

Charge For Mobile Phone Products

1. Choose the appropriate mobile charging adapter with the Charging cable;

2. Plug the USB port of the charging cable into the USB 5V Output port of the device;

3. Connect the mobile charging adapter to your mobile phones;

4. Press the power switch and charging begins

Note: The USB indicator light will keep bright when charging, if it doesn't charge for mobile phone products more than 3 seconds, the USB indicator light will automatically turn off.

Warning

1. When starting the car, please firmly and correctly insert the Blue plug of battery clip to the device, otherwise, it will affect the starting function, what's worse, the plastic of the battery clips maybe melt.

2. If it failed to start the car, please make sure the battery clips are well connected and the battery connectors are not rusty. After three-times failing of starting, please stop starting, because it may damage the car, please double-check the car.

3. Don't directly connect the two battery clips, it may cause safety accident.

4. Don't disassemble the device by your own, it may cause safety accident.