


Professional
 . Windscreen and Wind Muff
 . For Smartphone, Camera

Transducer Principle	Back Electronic Condenser
Polar Pattern	Super Cardioid
Max. SPL	100 dB
Frequency Range	80Hz~16000Hz
THD	≤ 1%
Output Impedance	2.2± 30% kΩ
Dynamic Range	100dB
Sensitivity	-34dB ± 3dB
Signal to Noise Ratio	≥ 58dB
Weight	34.2g
Dimension	21mm(D)*85mm(L)



www.comica-audio.com


BOX INCLUDES:

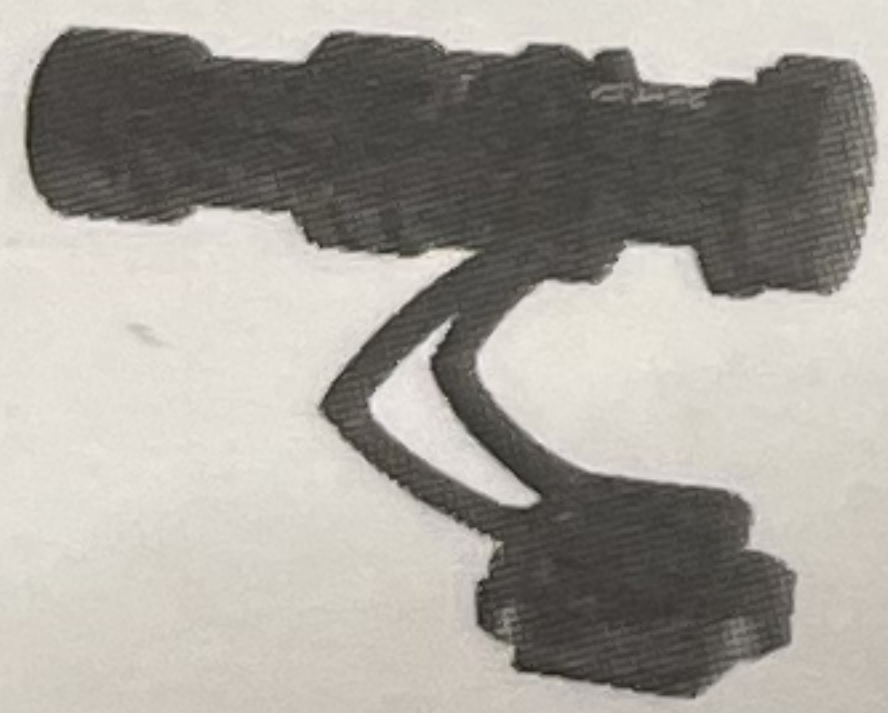


Mic Body




Mic Windscreen

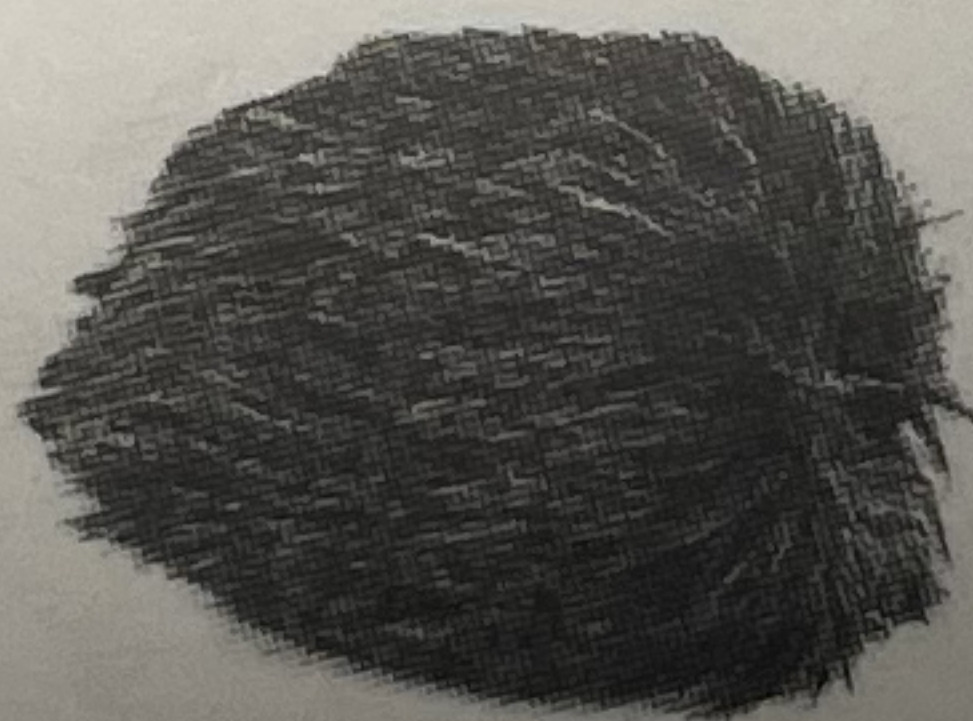

Mic Wind Muff

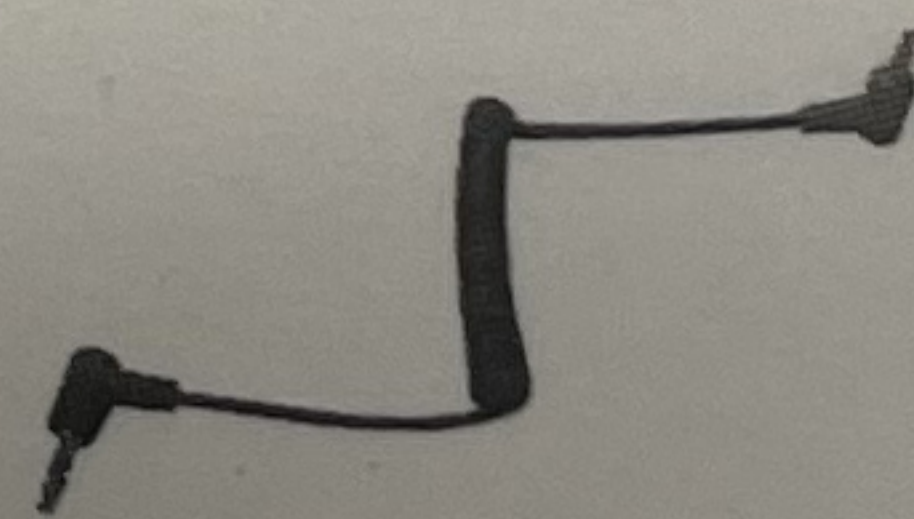

Smartphone
Audio Cable

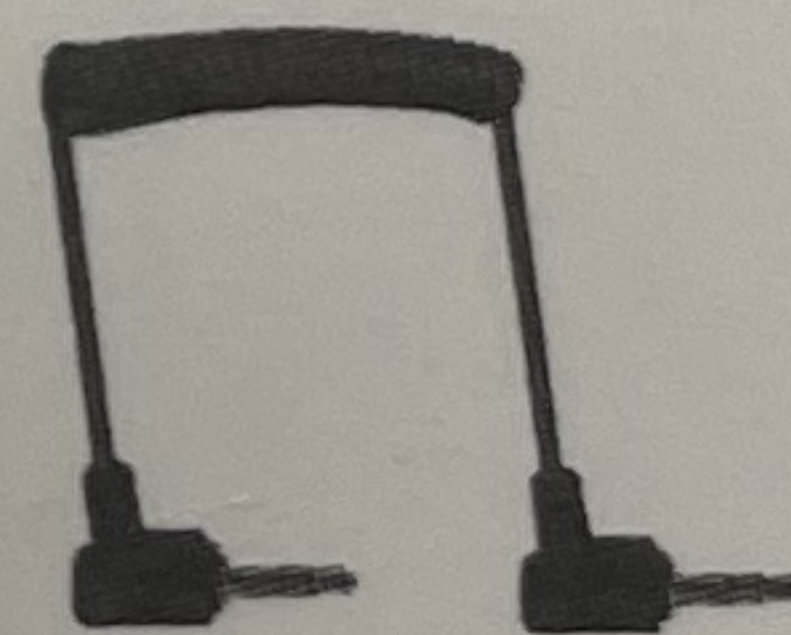


Camera Audio Cable



Carry Package

Product SN

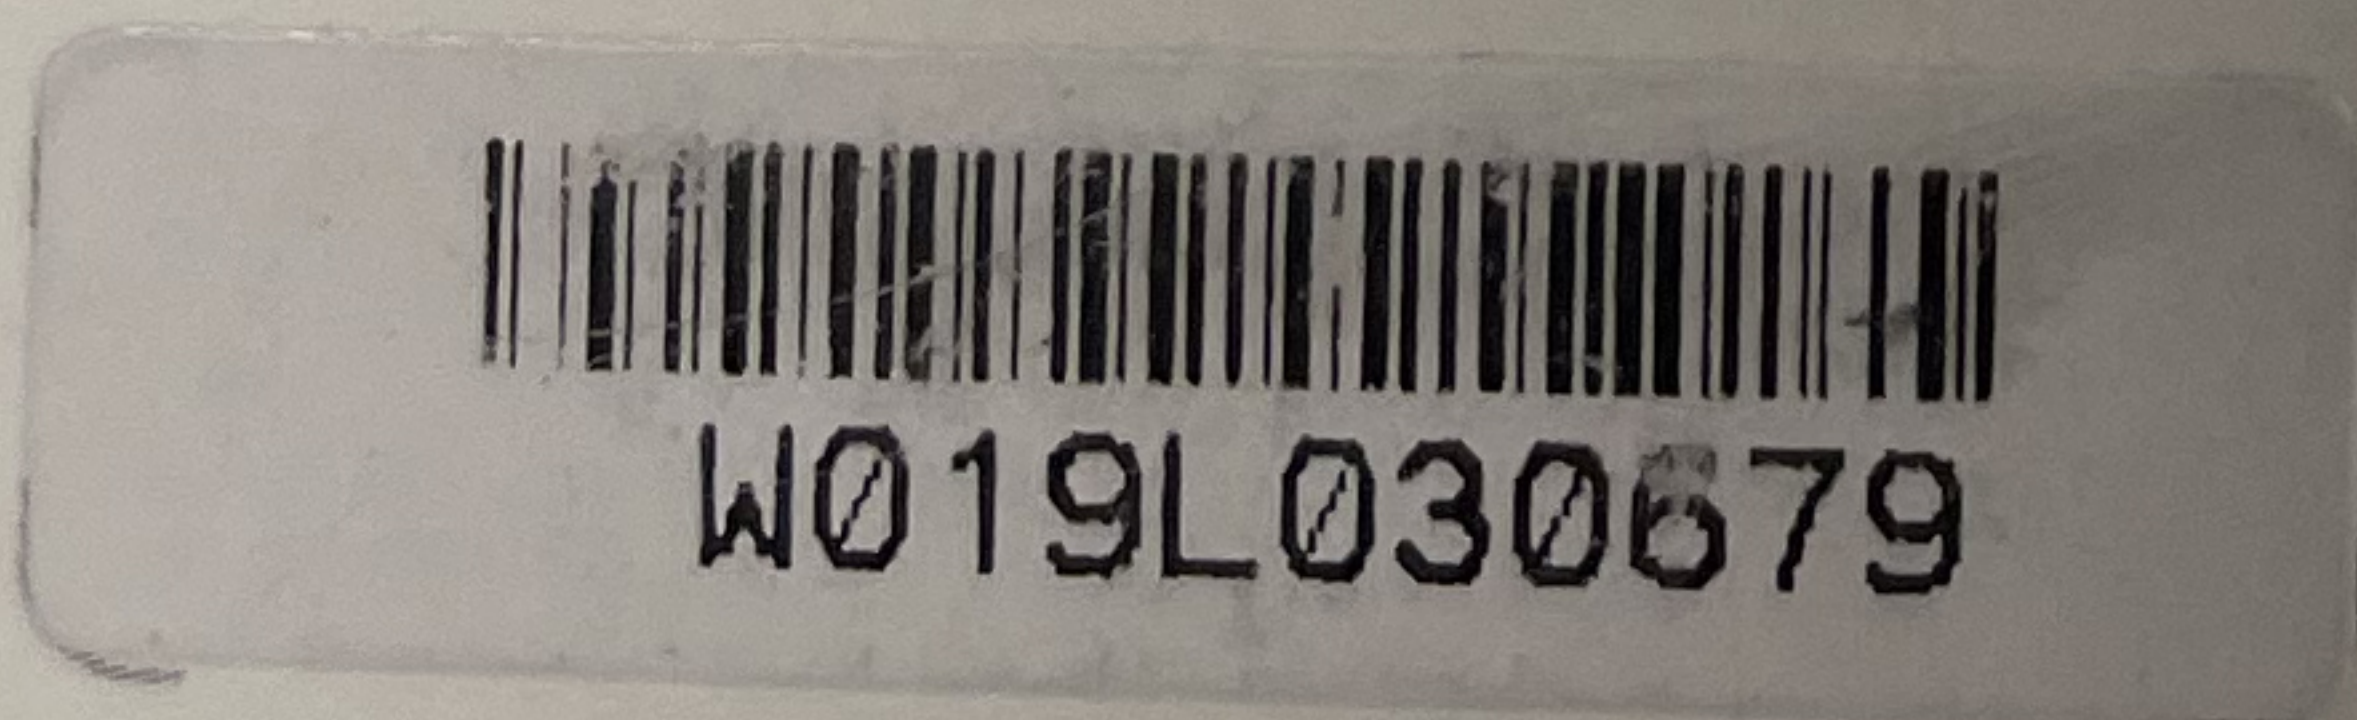

CE RoHS  
 Assembled in China