

TEST REPORT

Product: Little Penguin Sucking Vibrator

Model No.: ZDB302

Trade mark: N/A

Report No.: TCT210225E010

Issued Date: Mar. 04, 2021

Issued for:

Guangzhou Life Health Technology Co., Ltd.

**Room 701, Building A, Mitci Creative Park, Tongda, Guangzhou, Guangdong,
CN**

Issued By:

Shenzhen TCT Testing Technology Co., Ltd.

**1B/F, Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China**

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen TCT Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen TCT Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary	4
3. EUT Description	5
4. Test Methodology	6
4.1. Decision of Final Test Mode.....	6
4.2. EUT System Operation	6
5. Setup of Equipment under Test	7
5.1. Description of Support Units	7
5.2. Configuration Of System Under Test	7
6. Facilities and Accreditations	8
6.1. Facilities	8
6.2. Measurement Uncertainty	8
7. Emission Test.....	9
7.1. Conducted Emission.....	9
7.2. Discontinuous Disturbance	14
7.3. Disturbance Power Measurement	16
7.4. Radiated Emission	18
7.5. Harmonic Current Emissions.....	22
7.6. Flicker and Voltage Fluctuation	23
8. Immunity Test.....	25
8.1. General Performance Criteria Description	25
8.2. Electrostatic Discharge (ESD)	26
8.3. Radio-frequency Electromagnetic Field Amplitude Modulated (RS)	30
8.4. Electrical Fast Transient (EFT)	33
8.5. Surges	36
8.6. Radio-frequency Continuous Conducted (CS).....	38
8.7. Voltage Dip & Voltage Interruptions.....	40
9. Photographs of Test Configuration	42
10. Photographs of EUT	46

1. Test Certification

Product:	Little Penguin Sucking Vibrator
Model No.:	ZDB302
Applicant:	Guangzhou Lile Health Technology Co., Ltd.
Address:	Room 701, Building A, Mitci Creative Park, Tongda, Guangzhou, Guangdong, CN
Manufacturer:	Guangzhou Lile Health Technology Co., Ltd.
Address:	Room 701, Building A, Mitci Creative Park, Tongda, Guangzhou, Guangdong, CN
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz), DC 3.7 V
Date of Test:	Feb. 25, 2021 ~ Mar. 04, 2021
Applicable Standards:	EN 55014-1:2017 EN 55014-2:2015 EN 61000-3-2:2014 EN 61000-3-3:2013

The above equipment has been tested by Shenzhen TCT Testing Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Ronaldo **Date:** Mar. 04, 2021
Ronaldo

Check By: Howie **Date:** Mar. 04, 2021
Howie

Approved By: Tomsin **Date:** Mar. 04, 2021
Tomsin



2. Test Result Summary

Emission		
Test Method	Item	Result
EN 55014-1:2017	Conducted Emission	Pass
	Discontinuous Disturbance	N/A
	Disturbance Power Measurement	N/A
	Radiated Emission	Pass
EN61000-3-2:2014	Harmonic Current Emissions	N/A
EN 61000-3-3:2013	Voltage Fluctuations & Flicker	Pass

Immunity (EN 55014-2:2015)		
Test Method	Item	Result
EN 61000-4-2:2009	Electrostatic Discharge (ESD)	Pass
EN 61000-4-3:2006 + A1:2008 + A2:2010	Radio-frequency Electromagnetic Field Amplitude Modulated (RS)	Pass
EN 61000-4-4:2012	Electrical Fast Transients (EFT)	Pass
EN 61000-4-5:2014+A1:2017	Surges	Pass
EN 61000-4-6:2014+AC:2015	Radio-frequency Continuous Conducted (CS)	Pass
EN 61000-4-11:2004+A1:2017	Voltage Dips & Voltage Interruptions	Pass

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. The information of measurement uncertainty is available upon the customer's request.

3. EUT Description

Product Name:	Little Penguin Sucking Vibrator
Model No.:	ZDB302
Product Parameter:	Input: DC 5 V, 1 A Battery Capacity: DC 3.7 V, 500mAh, 1.85 Wh
DC Line:	<input type="checkbox"/> Shielded <input checked="" type="checkbox"/> Unshielded, <input checked="" type="checkbox"/> Detachable <input type="checkbox"/> Un-detachable <input type="checkbox"/> Not applicable <input checked="" type="checkbox"/> Length: 0.7 m

4. Test Methodology

4.1. Decision of Final Test Mode

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed:

Test Mode
Mode 1: Charging
Mode 2: Working

The following test mode was found to produce the highest emission level.

The Worst Test Mode		
Emission	Radiated Emission	Mode 2: Working

4.2. EUT System Operation

1. Set up EUT with the support equipments.
2. Make sure the EUT work normally during the test.

5. Setup of Equipment under Test

5.1. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	EP-TA200	R37M4PR3Q D1SE3	/	SAMSUNG

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. Configuration Of System Under Test

Mode 1

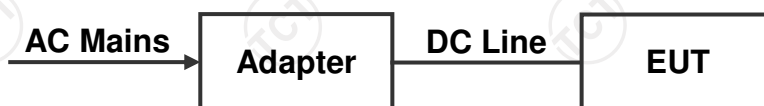

Mode 2



(EUT: Little Penguin Sucking Vibrator)

6. Facilities and Accreditations

6.1. Facilities

All measurement facilities used to collect the measurement data are located at TCT Lab.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	MU
1.	Temperature	$\pm 0.1^{\circ}\text{C}$
2.	Humidity	$\pm 1.0\%$
3.	Spurious Emissions, Conducted	$\pm 2.56\text{ dB}$
4.	All Emissions, Radiated	$\pm 4.28\text{ dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k=2$.

7. Emission Test

7.1. Conducted Emission

7.1.1. Test Specification

Test Requirement:	EN 55014-1
Test Method:	EN 55014-1
Frequency Range:	150 kHz to 30 MHz

7.1.2. Limits

Household appliances and equipment causing similar disturbances and regulation controls incorporation semiconductor devices

Frequency (MHz)	At mains terminals		At load terminals and additional terminals	
	Quasi-peak dB(uV)	Average ^a dB(uV)	Quasi-peak dB(uV)	Average ^a dB(uV)
0.15 - 0.5	66-56	59-46	80	70
0.5 - 5.0	56	46	74	64
5.0 - 30.0	60	50	74	64

a. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

Mains terminals of tools

Frequency (MHz)	Rated motor power not exceeding 700 W		Rated motor power above 700 W and not exceeding 1000 W		Rated motor power above 1000 W	
	Quasi-peak dB(uV)	Average ^a dB(uV)	Quasi-peak dB(uV)	Average ^a dB(uV)	Quasi-peak dB(uV)	Average ^a dB(uV)
0.15 - 0.35	66-59	59-49	70-63	63-53	79-69	69-59
0.35 - 5.0	59	49	63	53	69	59
5.0 - 30.0	64	54	68	58	74	64

a. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

Note: The limits for the measurement with the average detector are tentative and may be modified after a period of experience.

7.1.3. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jul. 27, 2021
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2021
Attenuator	N/A	10dB	164080	Sep. 02, 2021
Coaxial Cable	TCT	CE-05	N/A	Sep. 02, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.1.4. Test Method

Measurements were made on a ground plane that extends 1-meter minimum beyond all sides of the system under test. All power was connected to the system through Line Impedance Stabilization Networks (LISN). Conducted voltage measurements on mains lines were made at the output of the LISN. Conducted voltage on load terminals and additional terminals were made by using a 1500 Ω probe.

7.1.5. Block Diagram of Test Setup

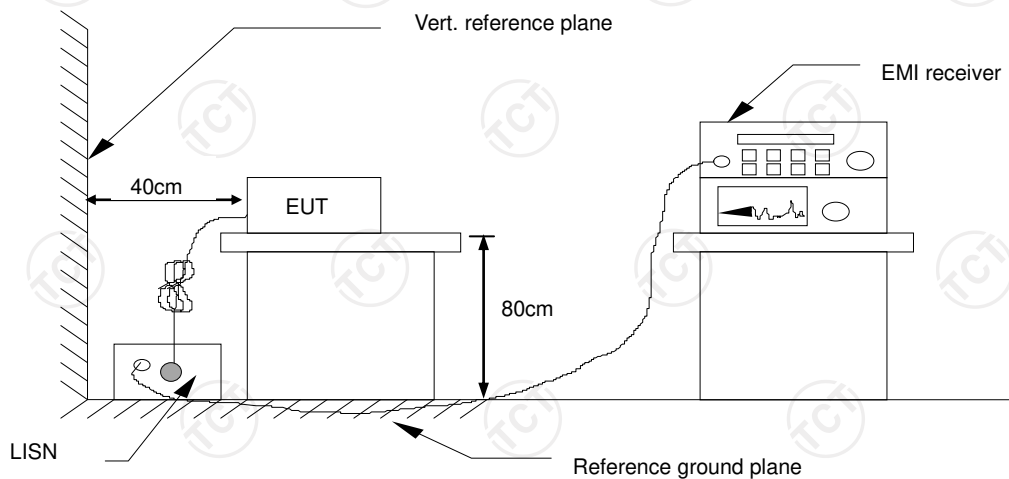

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.6. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz)		
Test Result:	Pass		

Note:

L1 = Live Line / N = Neutral Line

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Correct Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)


Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average


* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Please refer to following diagram for individual

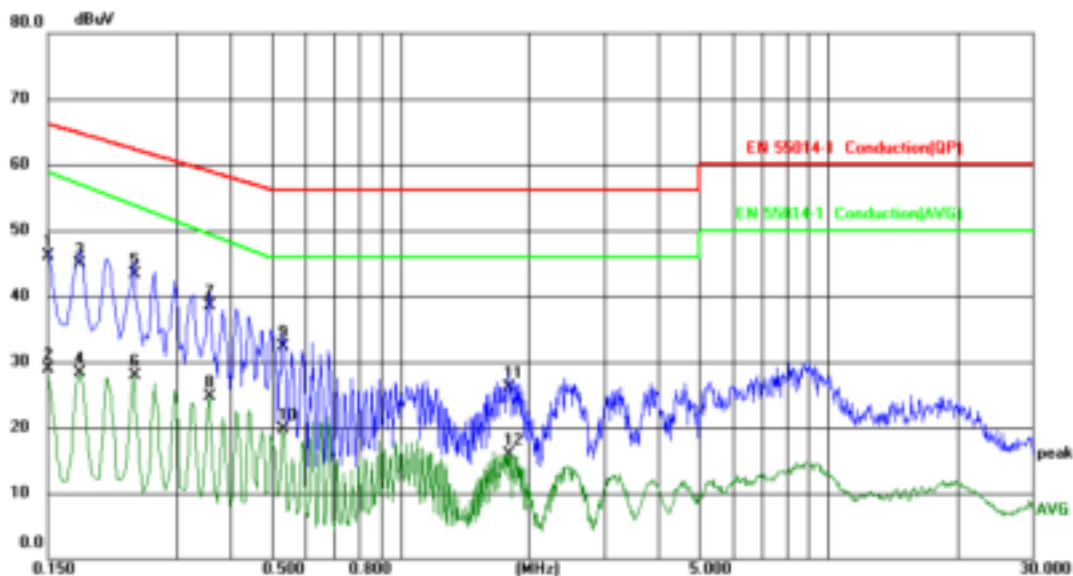

Site: Phase: **L1** Temperature: 25 (C)
 Limit: EN 55014-1 Conduction(QP) Power: Humidity: 55 %RH
 Note: DC 5V(Adapter Input AC 230V/50Hz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1500	36.09	10.10	46.19	66.00	-19.81	QP	
2		0.1500	18.73	10.10	28.83	59.00	-30.17	AVG	
3		0.1780	34.74	10.10	44.84	64.58	-19.74	QP	
4		0.1780	18.25	10.10	28.35	57.15	-28.80	AVG	
5	*	0.2380	33.09	10.12	43.21	62.17	-18.96	QP	
6		0.2380	17.86	10.12	27.98	54.02	-26.04	AVG	
7		0.3580	28.29	10.13	38.42	58.77	-20.35	QP	
8		0.3580	14.63	10.13	24.76	49.61	-24.85	AVG	
9		0.5299	22.21	10.14	32.35	56.00	-23.65	QP	
10		0.5299	9.56	10.14	19.70	46.00	-26.30	AVG	
11		1.7820	15.82	10.23	26.05	56.00	-29.95	QP	
12		1.7820	5.70	10.23	15.93	46.00	-30.07	AVG	

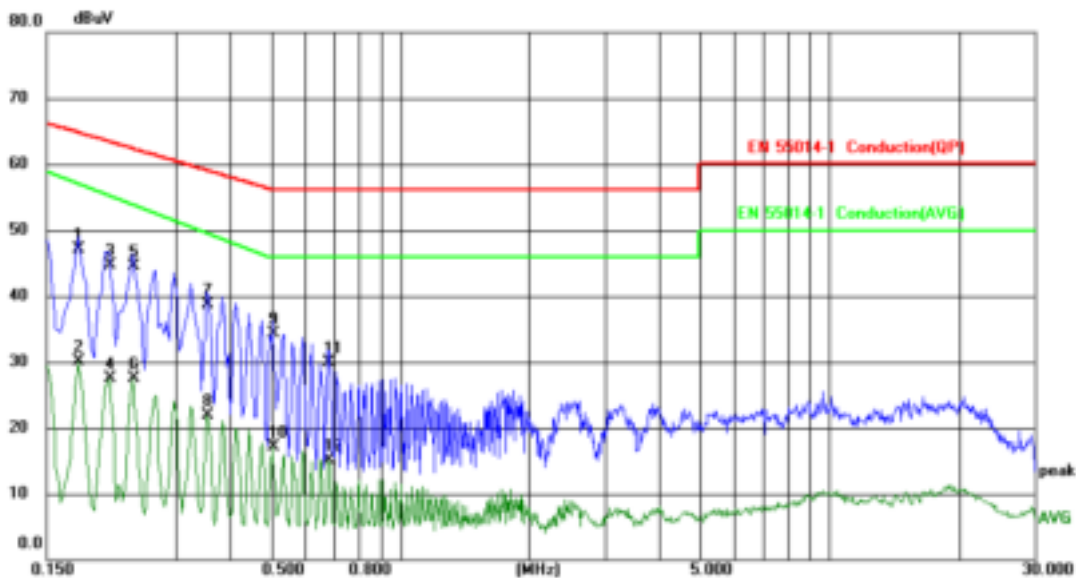

Site: Phase: **N** Temperature: 25 (C)
 Limit: EN 55014-1 Conduction(QP) Power: Humidity: 55 %RH
 Note: DC 5V(Adapter Input AC 230V/50Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1780	37.07	10.10	47.17	64.58	-17.41	QP	
2		0.1780	20.09	10.10	30.19	57.15	-26.96	AVG	
3		0.2100	34.59	10.11	44.70	63.21	-18.51	QP	
4		0.2100	17.38	10.11	27.49	55.37	-27.88	AVG	
5		0.2380	34.31	10.12	44.43	62.17	-17.74	QP	
6		0.2380	17.43	10.12	27.55	54.02	-26.47	AVG	
7		0.3540	28.55	10.13	38.68	58.87	-20.19	QP	
8		0.3540	11.82	10.13	21.95	49.73	-27.78	AVG	
9		0.5060	24.17	10.14	34.31	56.00	-21.69	QP	
10		0.5060	6.94	10.14	17.08	46.00	-28.92	AVG	
11		0.6820	19.71	10.15	29.86	56.00	-26.14	QP	
12		0.6820	5.03	10.15	15.18	46.00	-30.82	AVG	

7.2. Discontinuous Disturbance

7.2.1. Test Specification

Test Requirement:	EN 55014-1
Test Method:	EN 55014-1
Frequency Range:	150 kHz to 30 MHz

7.2.2. Limits

The click limit L_q is determined from the formula:

$$L_q = L + \Delta L$$

which the limits L for continuous disturbance shall be increased (see table 1):

which corresponding to the click rate N shall be calculated the amount ΔL by

$$\Delta L = 44 \text{ dB for } N < 0,2$$

$$\Delta L = [20 \log(30/N)] \text{ dB for } 0,2 \leq N < 30$$

Table 1

Frequency (MHz)	At mians terminals		At load terminals and additional terminals	
	Quasi-peak dB(uV)	Average dB(uV)	Quasi-peak dB(uV)	Average dB(uV)
0.15 - 0.35	66-56	59-46	80	70
0.35 - 5.0	56	46	74	64
5.0 - 30.0	60	50	74	64

7.2.3. Test Instruments


Discontinuous Disturbance Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Clicker	Schwarzbeck	DIA1512D	21554	Sep. 02, 2021
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibration can be traced to international system unit (SI).

7.2.4. Test Method

Measurement of a disturbance, the amplitude of which exceeds the quasi-peak limit of continuous disturbance, the duration of which is not longer than 200 ms which is separated from a subsequent disturbance by at least 200 ms.

7.2.5. Block Diagram of Test Setup

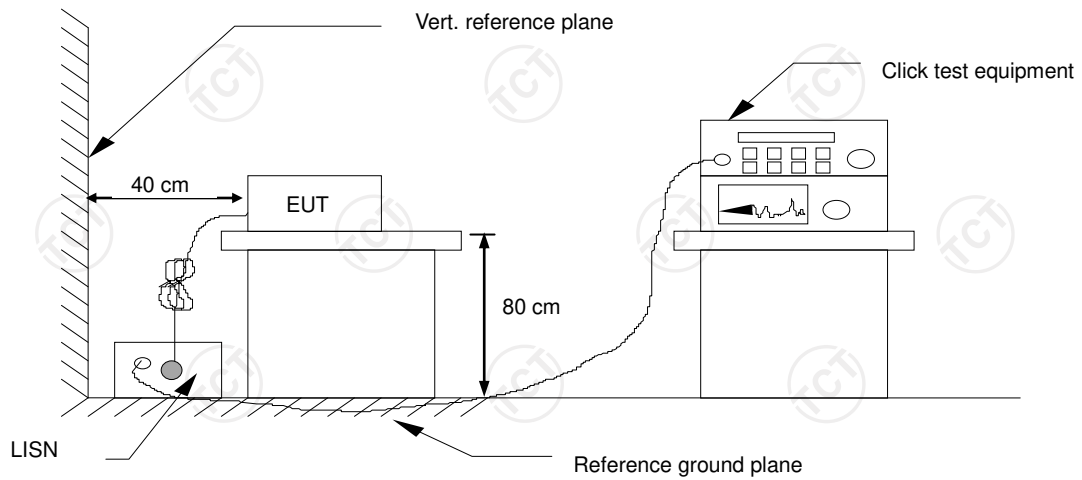

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.2.6. Test Results

Note: This test isn't applicable because the EUT doesn't have relative function.

7.3. Disturbance Power Measurement

7.3.1. Test Specification

Test Requirement:	EN 55014-1
Test Method:	EN 55014-1
Frequency Range:	30 MHz to 300 MHz

7.3.2. Limits

Frequency (MHz)	Household appliances and similar appliances		Rated motor power not exceeding 700 W	
	Quasi-peak dB(pW)	Average ^a dB(pW)	Quasi-peak dB(pW)	Average ^a dB(pW)
30 ~ 300	45-55	35-45	45-55	35-45
Frequency (MHz)	Rated motor power above 700 W and not exceeding 1000 W		Rated motor power above 1000 W	
	Quasi-peak dB(pW)	Average ^a dB(pW))	Quasi-peak dB(pW)	Average ^a dB(pW)
30 ~ 300	49-59	55-65	55-65	35-45

a. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

7.3.3. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jul. 27, 2021
Absorption Power Clamp	Da Ze technology CO.,LTD	ZN23201	0811	Sep. 17, 2021
Coaxial Cable	TCT	DP-06	N/A	Sep. 02, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.3.4. Test Method

Measurements were made on a ground plane that extends 1-meter minimum beyond all sides of the system under test. All power was connected to the system through Line Impedance Stabilization Networks (LISN). The lead to be measured on is stretched in a straight line for a distance sufficient to accommodate the absorbing clamp, and to permit the necessary measuring adjustment of position for tuning. The clamp is placed around the lead so as to measure a quantity proportional to the disturbance on the lead.

7.3.5. Block Diagram of Test Setup

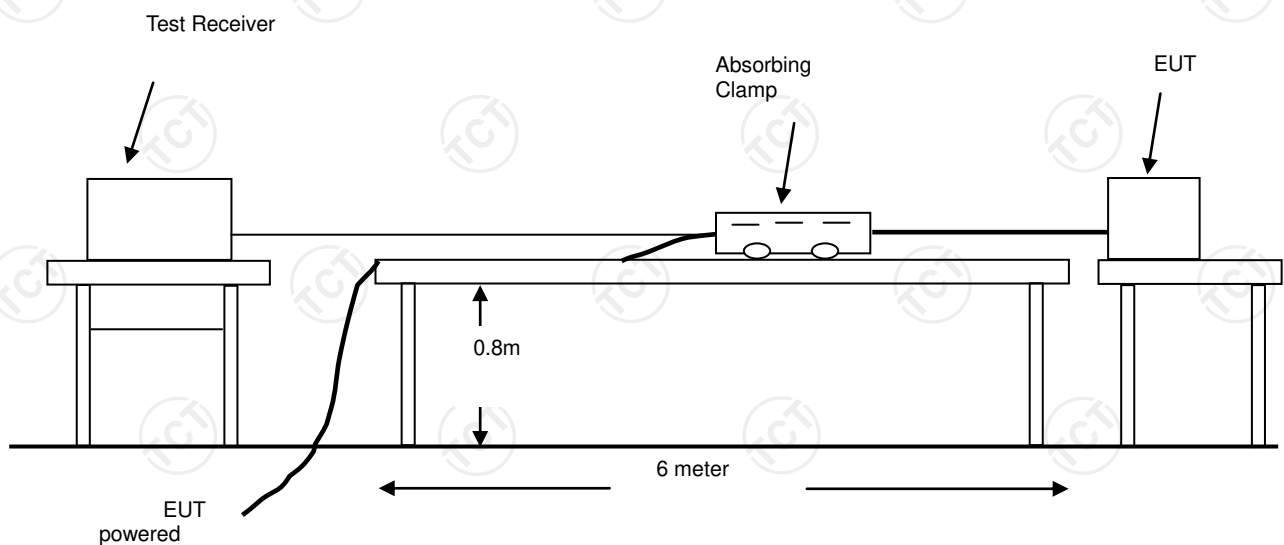

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.3.6. Test Results

Note: This test isn't applicable because the EUT doesn't have relative function.

7.4. Radiated Emission

7.4.1. Test Specification

Test Requirement:	EN 55014-1
Test Method:	EN 55014-1
Frequency Range:	30 MHz to 1000 MHz
Measurement Distance:	3 m
Antenna Polarization:	Horizontal & Vertical

7.4.2. Limits

Frequency (MHz)	Limit (dBuV/m) (At 3m)
30 - 230	40
230 - 1000	47

Note: The lower limit shall apply at the transition frequency.

7.4.3. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jul. 27, 2021
Amplifier	HP	8447D	2727A05017	Sep. 02, 2021
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Coaxial Cable	TCT	RE-01	N/A	Jul. 27, 2021
Coaxial Cable	TCT	RE-high-04	N/A	Sep. 02, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.4.4. Test Method

Measurements were made in a 3-meter semi-anechoic chamber that complies to CISPR 16. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. Block Diagram of Test Setup.

7.4.5. Block Diagram of Test Setup

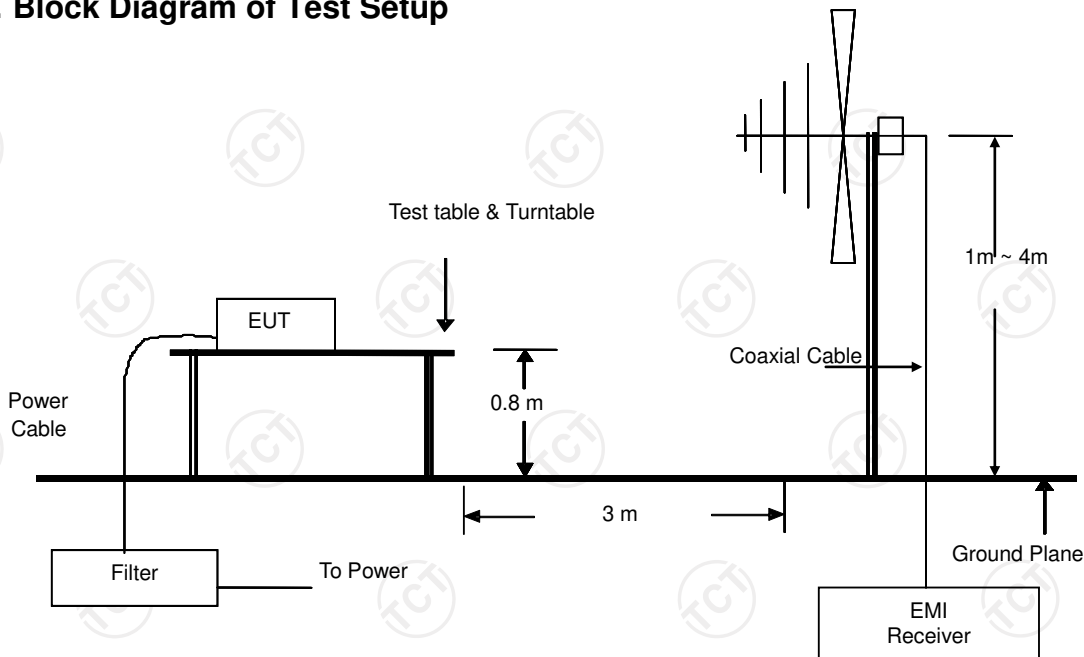

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.4.6. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1, Mode 2		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz), DC 3.7 V		
Test Result:	Pass		

Note:

Freq. = Emission frequency in MHz

Reading level (dBµV/m) = Receiver reading

Corr. Factor (dB) = Antenna Factor + Cable Loss - AMP Factor

Measurement (dBµV/m) = Reading level (dBµV/m) + Corr. Factor (dB)

Limit (dBµV/m) = Limit stated in standard

Margin (dB) = Measurement (dBµV/m) – Limit (dBµV/m)


* is meaning the worst frequency has been tested in the test frequency range

Please refer to following diagram for individual



Site: Polarization: **Horizontal** Temperature: 25
 Limit: EN 55014-1 3M Radiation Power: DC 3.7V Humidity: 55 %
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBm	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		39.4587	28.75	-13.40	15.35	40.00	-24.65	QP			
2		109.3110	26.14	-13.07	13.07	40.00	-26.93	QP			
3		274.4463	36.88	-11.27	25.61	47.00	-21.39	QP			
4		569.9687	32.61	-5.67	26.94	47.00	-20.06	QP			
5		850.7603	41.85	-2.90	38.95	47.00	-8.05	QP			
6	*	919.1314	41.35	-1.72	39.63	47.00	-7.37	QP			

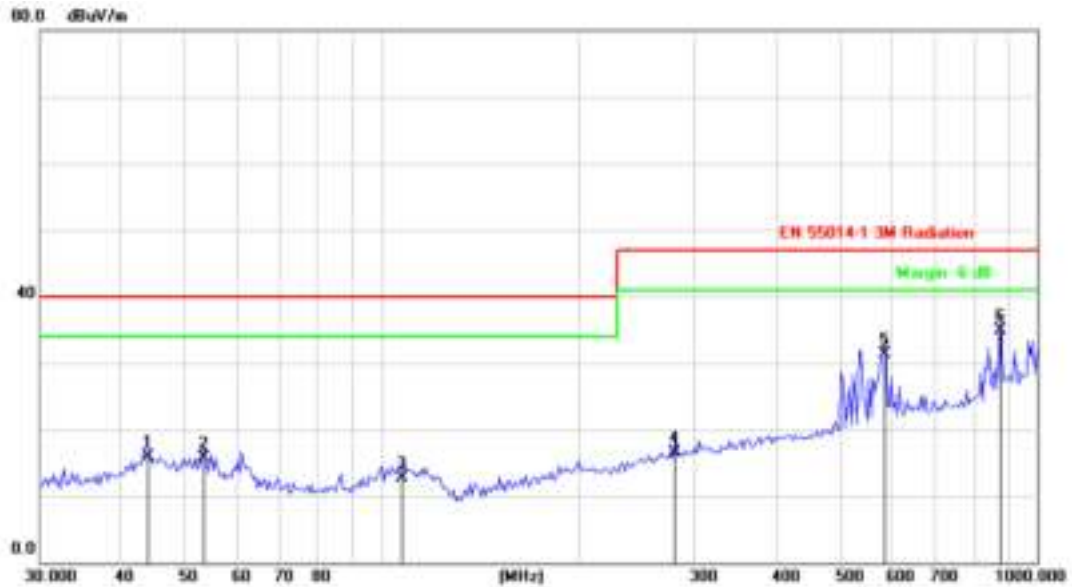

Site: Polarization: **Vertical** Temperature: 25
 Limit: EN 55014-1 3M Radiation Power: DC 3.7V Humidity: 55 %
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBm	dB	cm	degree	Comment
1		43.8452	28.40	-12.40	16.00	40.00	-24.00	QP		
2		53.3794	28.46	-12.67	15.79	40.00	-24.21	QP		
3		107.0306	25.82	-13.16	12.66	40.00	-27.34	QP		
4		280.2936	27.55	-11.03	16.52	47.00	-30.48	QP		
5		586.2172	36.69	-5.39	31.30	47.00	-15.70	QP		
6	*	881.1838	37.46	-2.58	34.88	47.00	-12.12	QP		

7.5. Harmonic Current Emissions

7.5.1. Test Specification


Test Requirement:	EN 61000-3-2
Test Method:	EN 61000-3-2
Limits:	Class A

7.5.2. Test Instruments

Harmonic Test Equipment				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
AC Power Supply	KIKUSUI	PCR4000M	UC002552	Sep. 11, 2021
Harmonic/Flicker Analyzer	KIKUSUI	KHA1000	UD002324	Sep. 11, 2021
Multi Outlet Unit	KIKUSUI	OT01-KHA	UF003026	Sep. 11, 2021
Line Impedance Network	KIKUSUI	LIN1020JF	UC001738	Jul. 27, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.5.3. Block Diagram of Test Setup

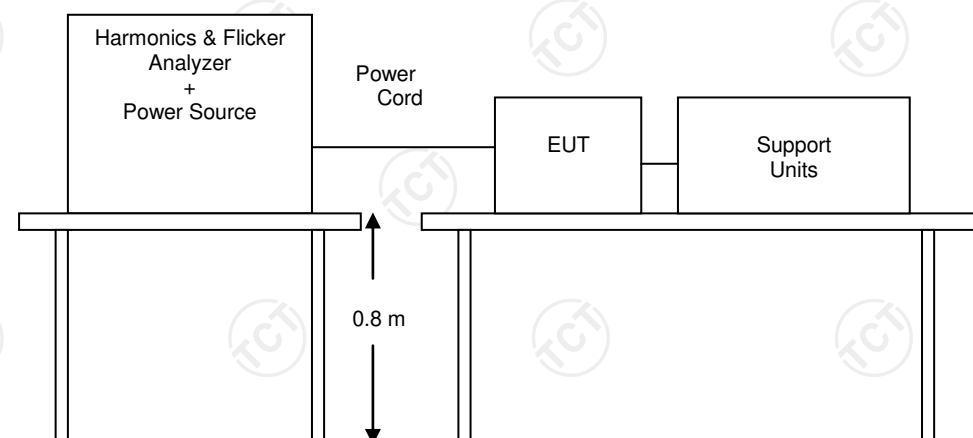

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5.4. Test Results

Note: This test isn't applicable because the EUT doesn't have relative function.

7.6. Flicker and Voltage Fluctuation

7.6.1. Test Specification

Test Requirement:	EN 61000-3-3
Test Method:	EN 61000-3-3

7.6.2. Limits


Test Item	Limit	Note
Pst	1.0	Pst means short-term flicker indicator
Plt	0.65	Plt means long-term flicker indicator
Tdt (ms)	500	Tdt means maximum time that dt exceeds 3 %.
dmax (%)	4/6/7	Dmax means maximum relative voltage change.
dc (%)	3.3	Dc means relative steady-state voltage change.

7.6.3. Test Instruments

Flicker Test Equipment				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
AC Power Supply	KIKUSUI	PCR4000M	UC002552	Sep. 11, 2021
Harmonic/Flicker Analyzer	KIKUSUI	KHA1000	UD002324	Sep. 11, 2021
Multi Outlet Unit	KIKUSUI	OT01-KHA	UF003026	Sep. 11, 2021
Line Impedance Network	KIKUSUI	LIN1020JF	UC001738	Jul. 27, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.6.4. Block Diagram of Test Setup

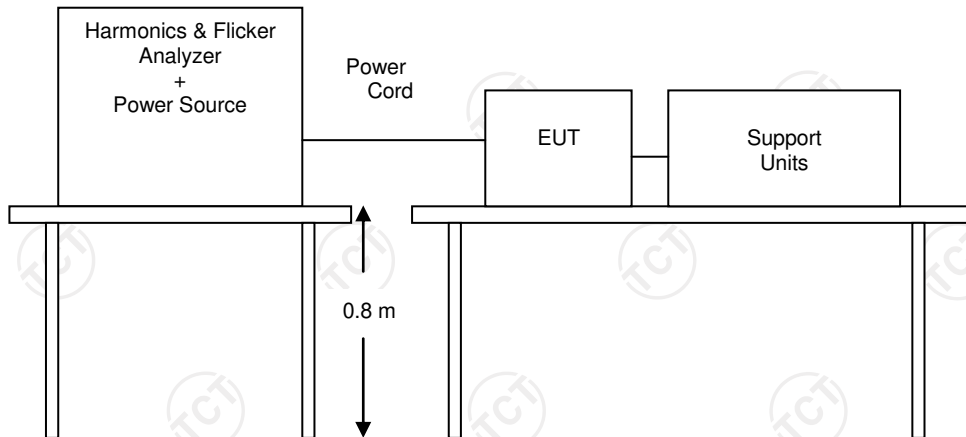

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.6.5. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz)		
Test Result:	Pass		

Test Data of Voltage Fluctuation and Flicker

Final Test Result	Pass
Nominal Voltage	230 V
Nominal Frequency	50 Hz
Plt Test Duration	600 s
Flicker Margin	100 %
d Measurement Margin	100 %

Segment	Pst	dmax(%)	dc(%)	Tmax(ms)	Judge
Limit	1.000	4.000	3.300	500	
Seg. 1	0.007	0.022	0.004	0	Pass

Plt	Value	Judge
Limit	0.650	
Measurement	0.003	Pass

8. Immunity Test

8.1. General Performance Criteria Description

Criterion A:	The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
Criterion B:	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
Criterion C:	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

8.2. Electrostatic Discharge (ESD)

8.2.1. Test Specification

Test Requirement:	EN 55014-2
Test Method:	EN 61000-4-2
Storage capacitor:	150 pF
Discharge resistor:	330 ohm
Discharge Voltage:	Contact Discharge: ± 4 kV Air Discharge: ± 8 kV HCP/VCP: ± 4 kV
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: Minimum 20 times at each test point Contact Discharge: Minimum 50 times at each test point
Discharge Mode:	1 time/s
Performance Criterion:	B

8.2.2. Test Instruments

Immunity Shielded Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Electrostatic Discharge Generator	HAEFELY	PESD300	H012056	Sep. 17, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.2.3. Test Method

1. Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed.

2. Contact Discharge:

The test was applied on accessible metallic parts of the EUT. The generator was re-triggered for a new single discharge and repeated 50 times for each pre-selected test point. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.


3. Indirect discharge for horizontal coupling plane:

At least 10 single discharges (in the most sensitive polarity) were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1 m from the EUT and with the discharge electrode touching the coupling plane.

4. Indirect discharge for vertical coupling plane:

At least 10 single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5 m X 0.5 m, was placed parallel to, and positioned at a distance of 0.1 m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

8.2.4. Block Diagram of Test Setup

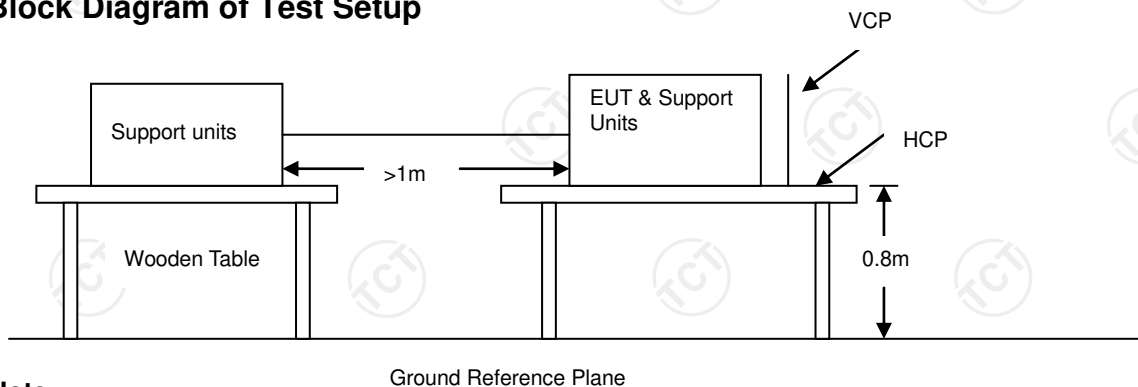

Note:

1. Table-top Equipment

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6 m x 0.8 m) was placed on the table and attached to the **GRP** by means of a cable with 940 k total impedance.

The equipment under test was installed in a representative system as described in section 7 of EN 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5 mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

2. Floor-standing Equipment

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

8.2.5. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1, Mode 2		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz), DC 3.7 V		
Test Result:	Pass		

Test points:	I: Please refer to red arrows as below plots
	II: Please refer to yellow arrows as below plots



Direct Discharge					
Discharge Voltage (KV)	Type of discharge	Test points	Performance Criterion	Observation	Results
± 8	Air	I	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	Pass
± 4	Contact	II	B	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	N/A

Indirect Discharge					
Discharge Voltage (KV)	Illuminated area of the EUT surface	Test points	Performance Criterion	Observation	Results
± 4	Top/ Bottom /Front/Back /Left/Right	HCP	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	Pass
± 4	Front/ Back/Left /Right	VCP	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	Pass

Note:

1. There was no change compared with initial operation during the test.
2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

Test point as follows:

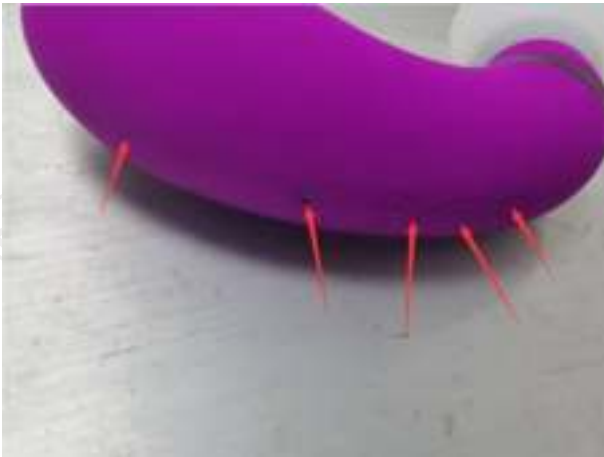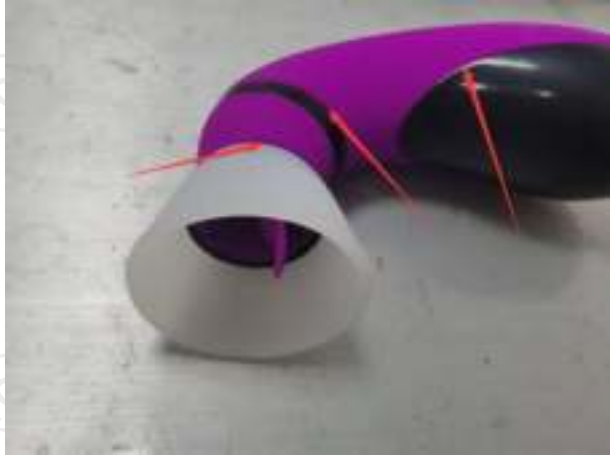

8.3. Radio-frequency Electromagnetic Field Amplitude Modulated (RS)

8.3.1. Test Specification

Test Requirement:	EN 55014-2
Test Method	EN 61000-4-3
Frequency Range:	80 MHz -1000 MHz
Test level:	3 V/m (unmodulated, r.m.s)
Modulation:	1 kHz, 80 % AM, sine wave
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal & Vertical
Antenna Height:	1.5 m
Performance Criterion:	A

8.3.2. Test Instruments


966 RS Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Signal Generator	Maconi	2022D	119246/003	Sep. 02, 2021
Power Amplifier	M2S	A00181-1000	9801-112	Sep. 02, 2021
Power Amplifier	M2S	AC8113/ 800-250A	9801-179	Sep. 02, 2021
Power Antenna	SCHAFFNER	CBL6140A	1204	Sep. 02, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.3.3. Test Method

1. The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
2. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1 kHz sine-wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s, where the frequency range is swept incrementally; the step size was 1% of preceding frequency value.
3. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond and was not less than 0,5 s.
4. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.
5. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.

8.3.4. Block Diagram of Test Setup

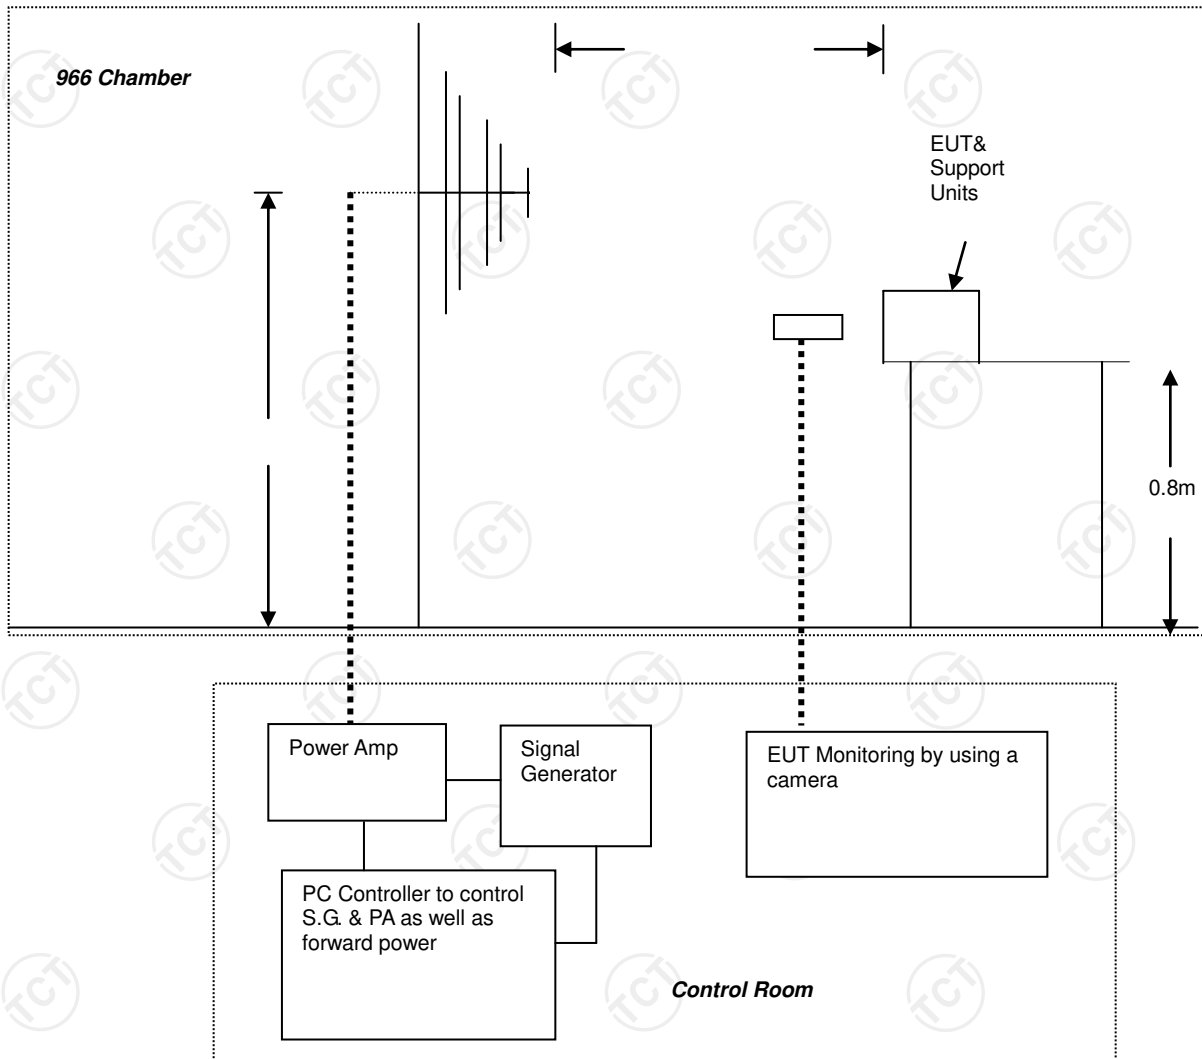

Note:

1. Table-top Equipment

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

2. Floor-standing Equipment

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

8.3.5. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1, Mode 2		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz), DC 3.7 V		
Test Result:	Pass		

Frequency (MHz)	Polarity	Position	Field Strength (V/m)	Performance Criterion	Observation
80 ~ 1000	V&H	Front	3	A	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
80 ~ 1000	V&H	Rear	3	A	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
80 ~ 1000	V&H	Left	3	A	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
80 ~ 1000	V&H	Right	3	A	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3

Note:

1. There was no change compared with initial operation during the test.
2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

8.4. Electrical Fast Transient (EFT)

8.4.1. Test Specification

Test Requirement:	EN 55014-2
Test Method:	EN 61000-4-4
Test Level:	signal lines and control lines: $\pm 0,5$ kV (peak) Input and output d.c. power ports: $\pm 0,5$ kV (peak) Input and output a.c. power ports: ± 1 kV (peak)
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave-shape:	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	2 minutes per level & polarity
Performance Criterion:	B

8.4.2. Test Instruments

Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Fast Transient Burst Simulator	Prima	EFT61004BG	PR12074375	Sep. 11, 2021
Capacitive coupling folder	Prima	EFT-CLAMP	N/A	Sep. 11, 2021
Single-phase transformer	Prima	JMB-3KVA	L12121902-2	Sep. 11, 2021


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.4.3. Test Method

1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1 m + 0.01 m thick. The ground reference plane was 1 m*1 m metallic sheet with 0.65 mm minimum thickness.
2. This reference ground plane was project beyond the EUT by at least 0.1 m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5 m.
3. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.
4. The length of the signal and power lines between the coupling device and the EUT is 0.5 m.

5. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.
6. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes.

8.4.4. Block Diagram of Test Setup

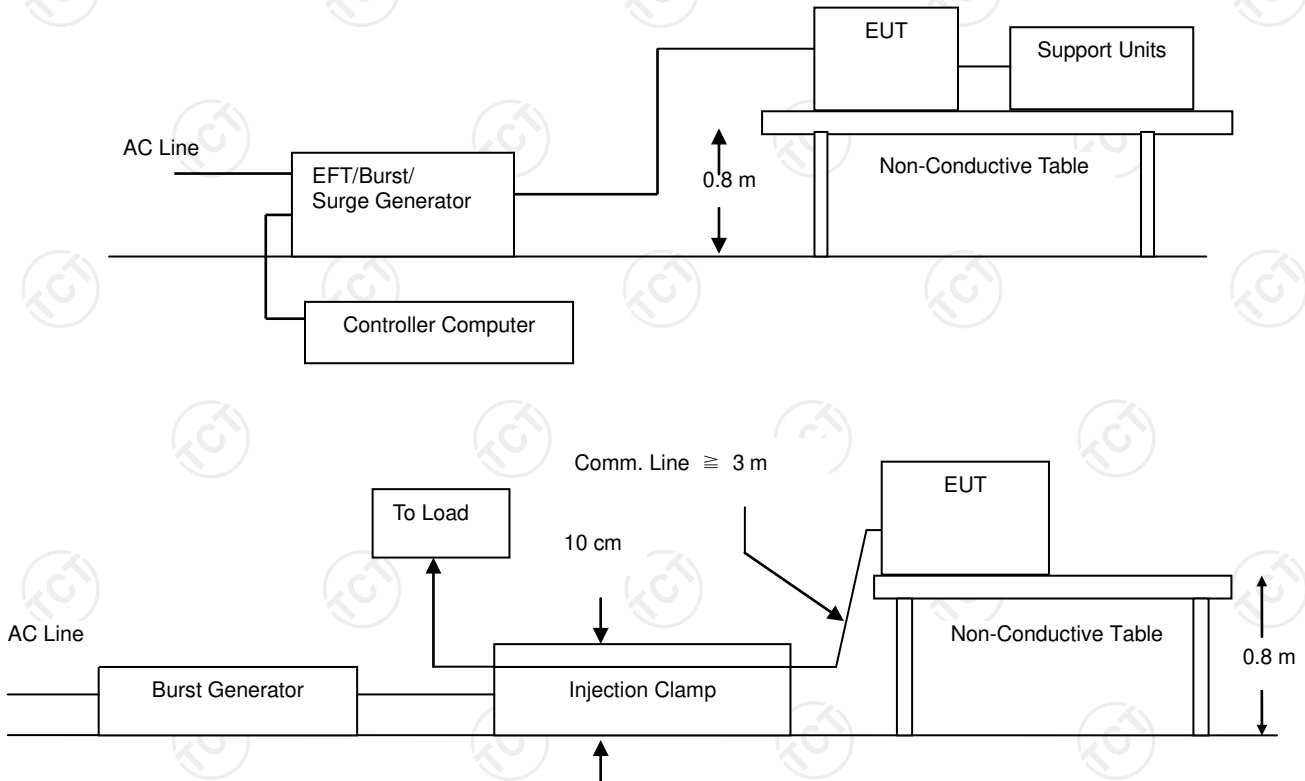

Note:

1. Table-top Equipment

The configuration consisted of a wooden table (0.8 m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25 mm thick and 2.5 m square) connected to the protective grounding system. A minimum distance of 0.5 m was provided between the EUT and the walls of the laboratory or any other metallic structure.

2. Floor-standing Equipment

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25 mm thick and 2.5 m square) connected to the protective grounding system.

8.4.5. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz)		
Test Result:	Pass		

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation
L	+/-	1	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3
N	+/-	1	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3
L -N	+/-	1	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3
PE	--	--	--	N/A
L – PE	--	--	--	N/A
N – PE	--	--	--	N/A
L – N – PE	--	--	--	N/A
DC Port	--	--	--	N/A
Control port	--	--	--	N/A
Signal port	--	--	--	N/A

Note:

1. There was no change compared with initial operation during the test.
2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

8.5. Surges

8.5.1. Test Specification

Test Requirement:	EN 55014-2
Test Method:	EN 61000-4-5
Test Level:	Input a.c. power ports: Line to line: ± 1 kV(peak) Line to ground: ± 2 kV(peak)
Polarity:	Positive & Negative
Wave-Shape:	1.2/50 us(8 /20 us)
Generator Source Impedance:	2 ohm between networks 12 ohm between network and ground
Test Interval:	60 s between each surge
Number of Tests:	5 positive at 90° phase angle, and 5 negative at 270° phase angle
Performance Criterion:	B

8.5.2. Test Instruments


Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Lightning Surge Generator	Prima	SUG61005BG	PR12125534	Sep. 11, 2021
Single-phase transformer	Prima	JMB-3KVA	L12121902-2	Sep. 11, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.5.3. Test Method

1. For line-to-line coupling mode, provide a 1 kV 1.2/50 us voltage surge (at open-circuit condition) and 8/20 us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2 kV.
2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.
3. Different phase angles are done individually.
4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

8.5.4. Block Diagram of Test Setup

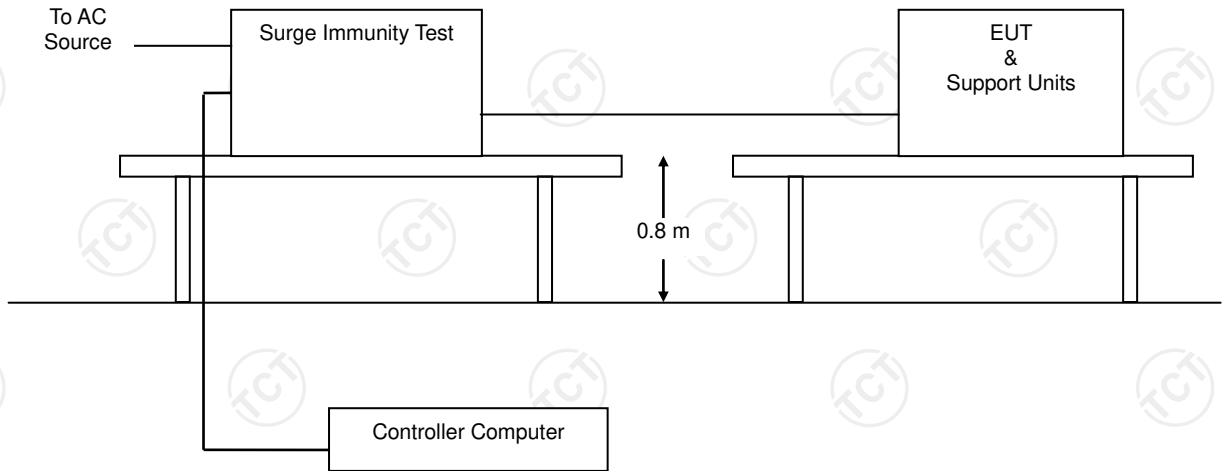

8.5.5. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz)		
Test Result:	Pass		

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation
L - N	+/-	1	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3
L - PE	--	--	--	N/A
N - PE	--	--	--	N/A
DC Port	--	--	--	N/A
Control port	--	--	--	N/A
Signal port	--	--	--	N/A

Note:

1. There was no change compared with initial operation during the test.
2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

8.6. Radio-frequency Continuous Conducted (CS)

8.6.1. Test Specification

Test Requirement:	EN 55014-2
Test Method	EN 61000-4-6
Frequency Range:	0.15 MHz - 230 MHz
Test Level:	signal lines and control lines: 1 V r.m.s. (unmodulated) Input and output d.c. power ports: 1 V r.m.s. (unmodulated) Input and output a.c. power ports: 3 V r.m.s. (unmodulated)
Modulation:	1 kHz, 80 % AM, sine wave
Performance Criterion:	A

8.6.2. Test Instrument

CS Test				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Conducted Disturbances Test System	Schloder	CDG 6000-75	126B1290	Sep. 11, 2021
CDN	Schloder	CDN M2+M3-16	A2210281	Sep. 11, 2021
Attenuator	PE	PE7017-6	N/A	Jul. 27, 2021
EM-Clamp	Schloder	EMCL-20	132A1194	Sep. 11, 2021


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.6.3. Test Method

1. The EUT are placed on an insulating support 0.1 m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3 m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
2. The disturbance signal described below is injected to EUT through CDN.
3. The EUT operates within its operational mode(s) under intended climatic conditions after power on.

4. The frequency range is swept from 0.150 MHz to 80 MHz using 3 V signal level, and with the disturbance signal 80 % amplitude modulated with a 1 kHz sine wave.
5. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

8.6.4. Block Diagram of Test Setup

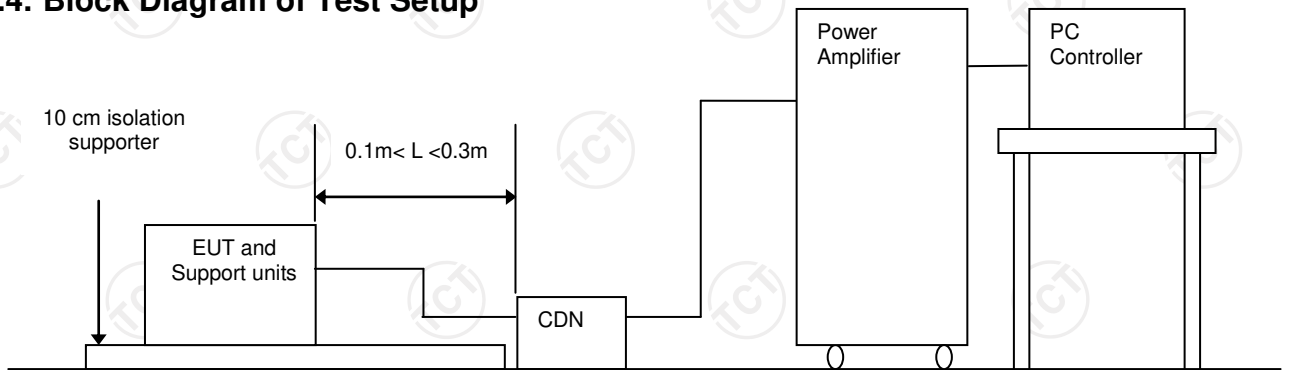

Note:

1. Table-Top and Floor-Standing Equipment

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

8.6.5. Test Results

Test Environment:	Temp.:	25 °C	Humid.:	55 %	Press.:	96 kPa
Test Mode:	Mode 1					
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz)					
Test Result:	Pass					

Frequency Band (MHz)	Field Strength (Vrms)	Injected Position	Injection Method	Performance Criterion	Observation
0.15 ~ 230	3	AC Mains	CDN-M2	A	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
0.15 ~ 230	--	--	--	--	N/A

Note:

1. There was no change compared with initial operation during the test.
2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

8.7. Voltage Dip & Voltage Interruptions

8.7.1. Test Specification

Test Requirement:	EN 55014-2
Test Level:	Test specification(50Hz) 0 % of U_T (Supply Voltage) for 0.5 period 40% of U_T (Supply Voltage) for 10 periods 70 % of U_T (Supply Voltage) for 25 periods Test specification(60Hz) 0 % of U_T (Supply Voltage) for 0.5 period 40% of U_T (Supply Voltage) for 10 periods 70 % of U_T (Supply Voltage) for 30 periods
Performance Criterion:	C

8.7.2. Test Instrument


Immunity shielded room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Cycle Sag Simulator	Prima	DRP61011AG	PR12106201	Sep. 11, 2021
Single-phase transformer	Prima	JMB-3KVA	L12121902-2	Sep. 11, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

8.7.3. Test Method

1. The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
2. Setting the parameter of tests and then perform the test software of test simulator.
3. Conditions changes to occur at 0 degree crossover point of the voltage waveform.
4. Recording the test result in test record form.

8.7.4. Block Diagram of Test Setup

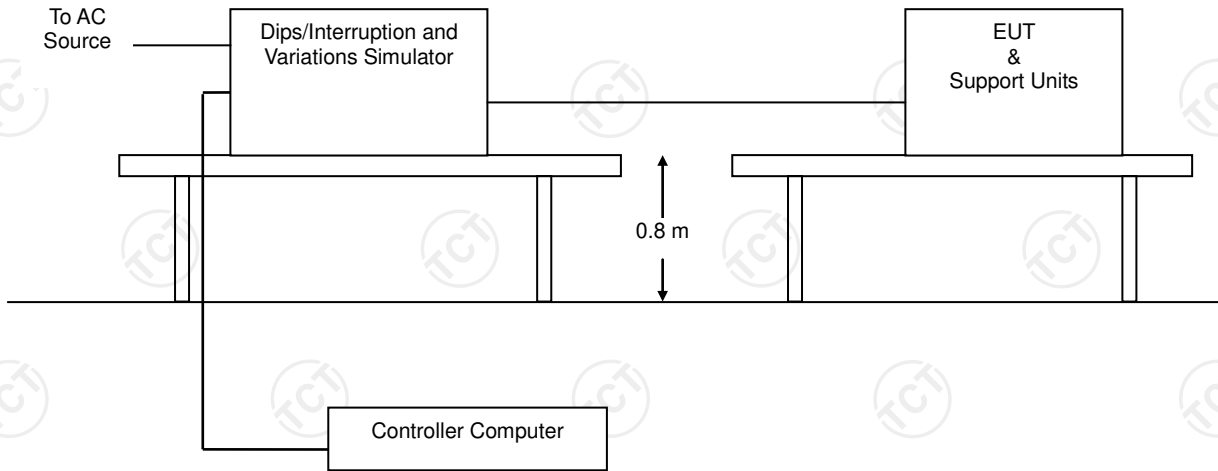

8.7.5. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1		
Test Voltage:	DC 5 V (Adapter Input AC 230 V/ 50 Hz)		
Test Result:	Pass		

Test Power: 230 Vac, 50 Hz			
Test Level In % U_T	Duration (cycles)	Performance Criterion	Observation
0	0.5	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3
40	10	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3
70	25	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3

Note:

1. There was no change compared with initial operation during the test.
2. The function of EUT is loss during the test and it can be recovered by itself operation after the test.
3. The function of EUT is loss during the test and it can be recoverable by manually operation after the test.

9. Photographs of Test Configuration

Conducted Emission Test View




Radiated Emission Test View




Flicker Test View




ESD Test View

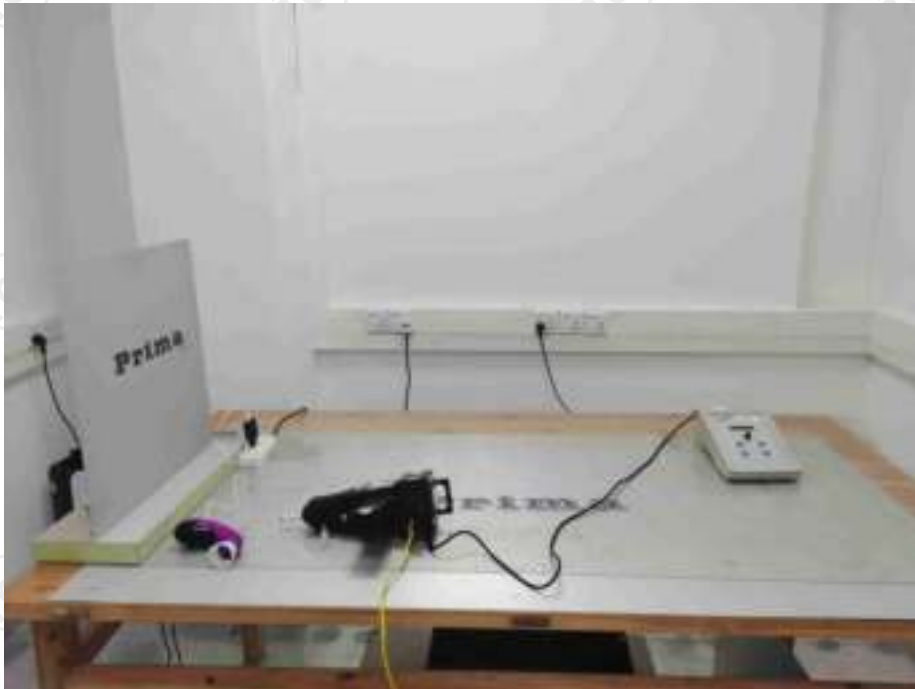

EFT Test View

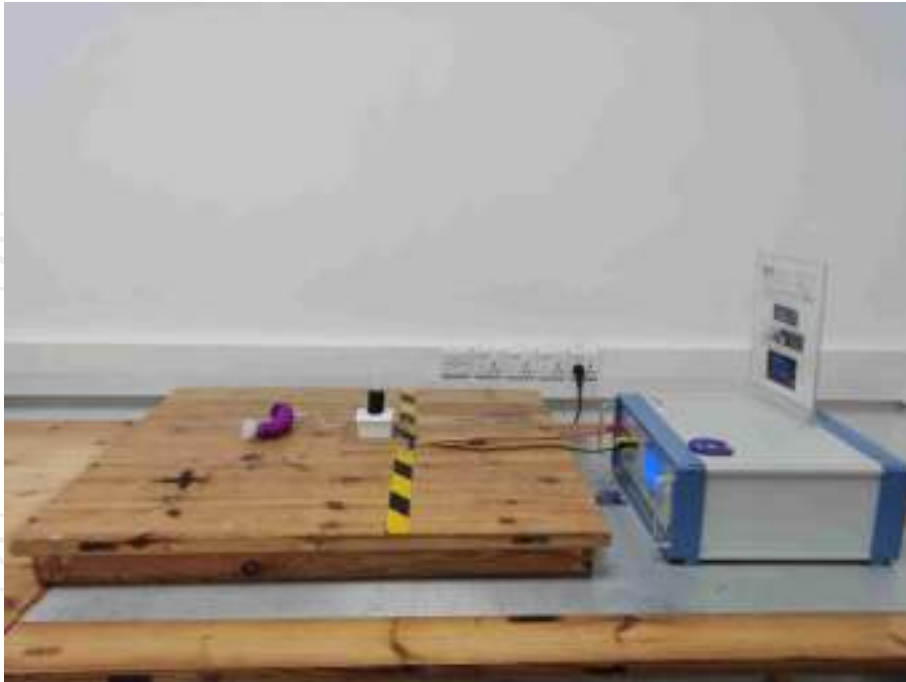

Surges Test View

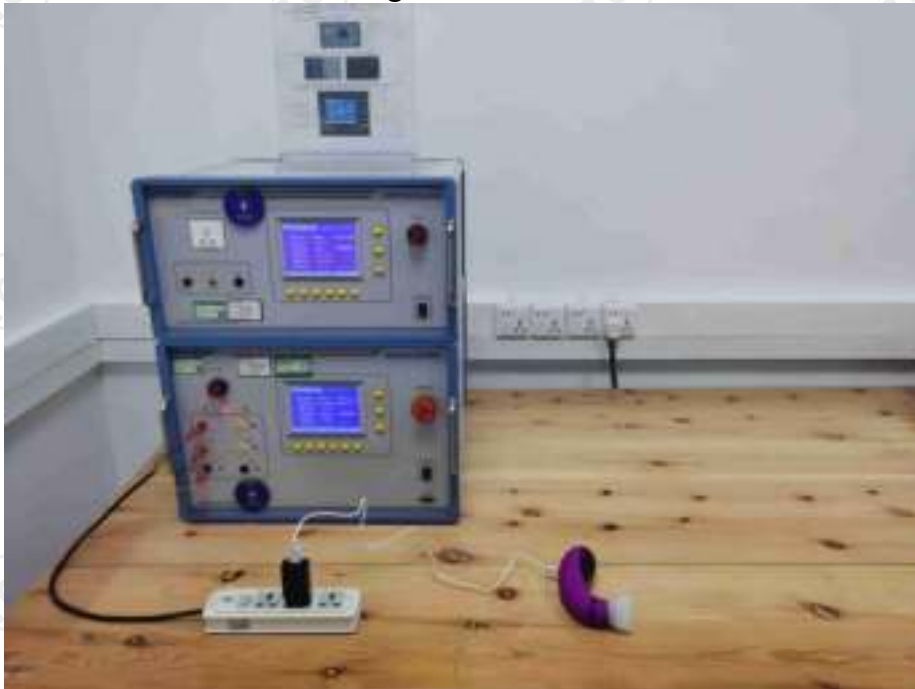

CS Test View






Voltage Dips/Interruptions Test View





10. Photographs of EUT





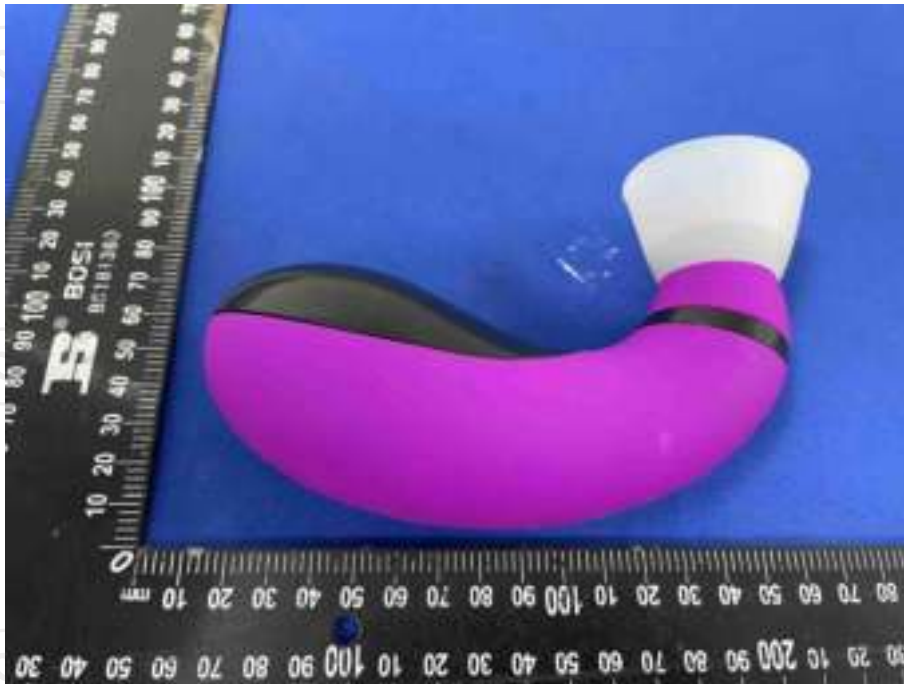

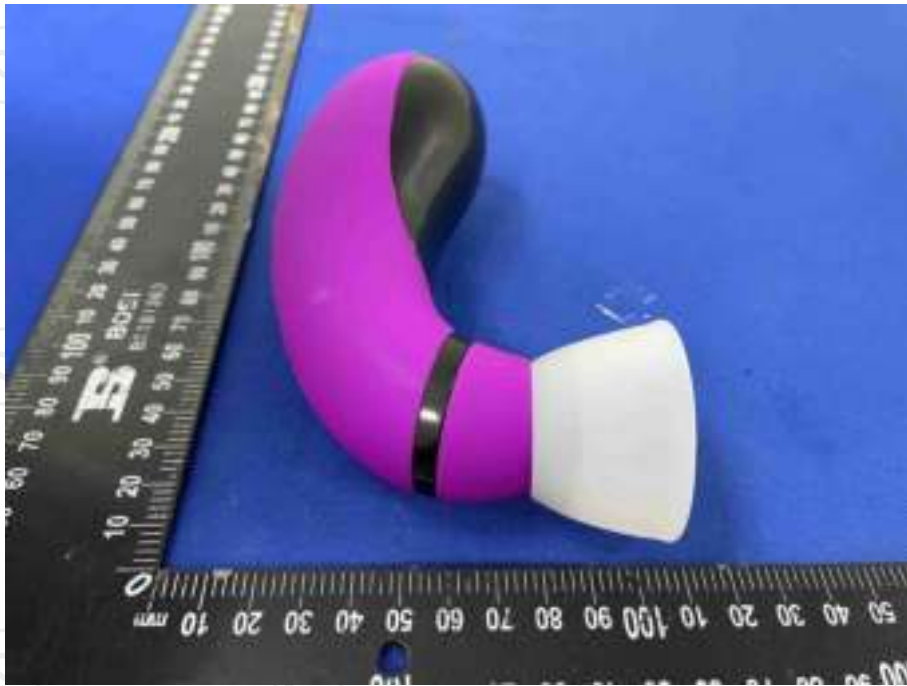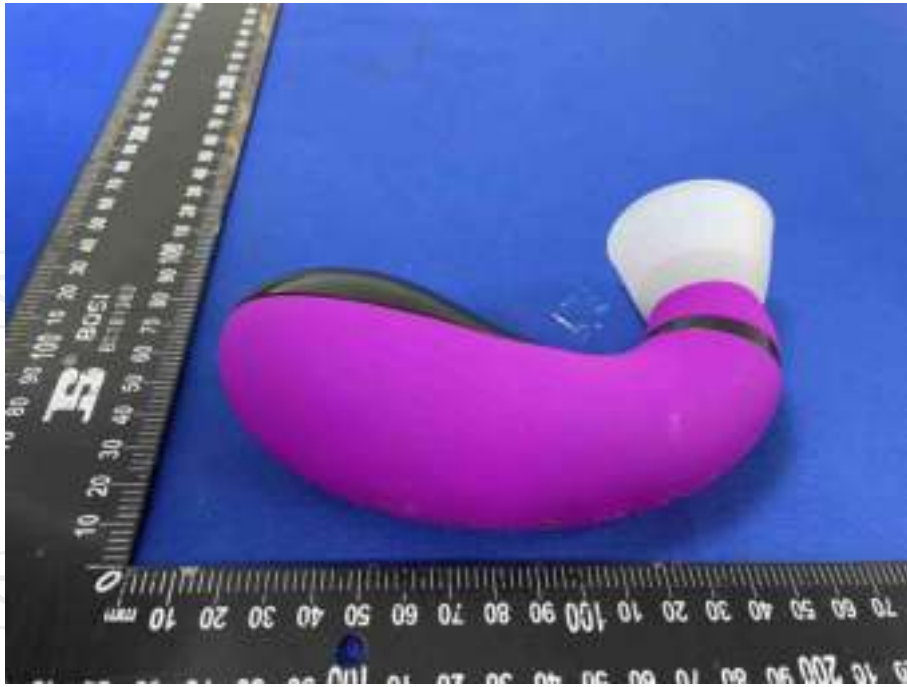



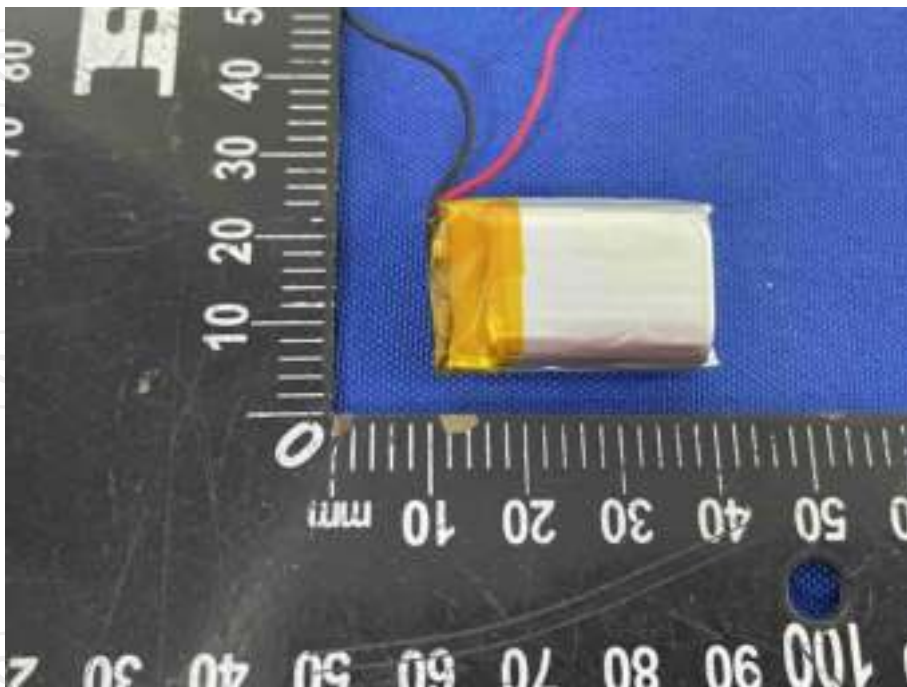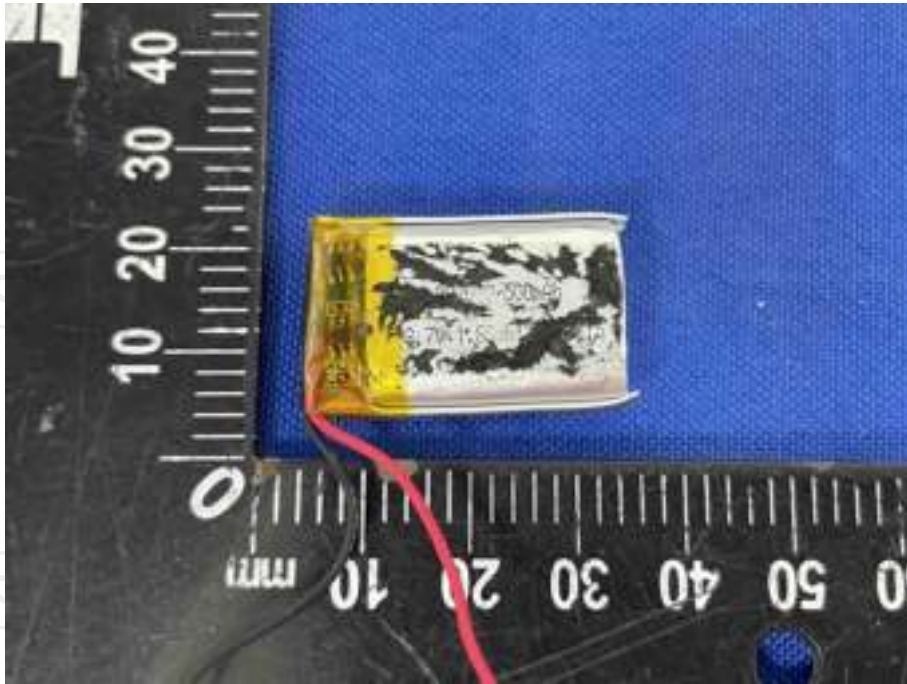

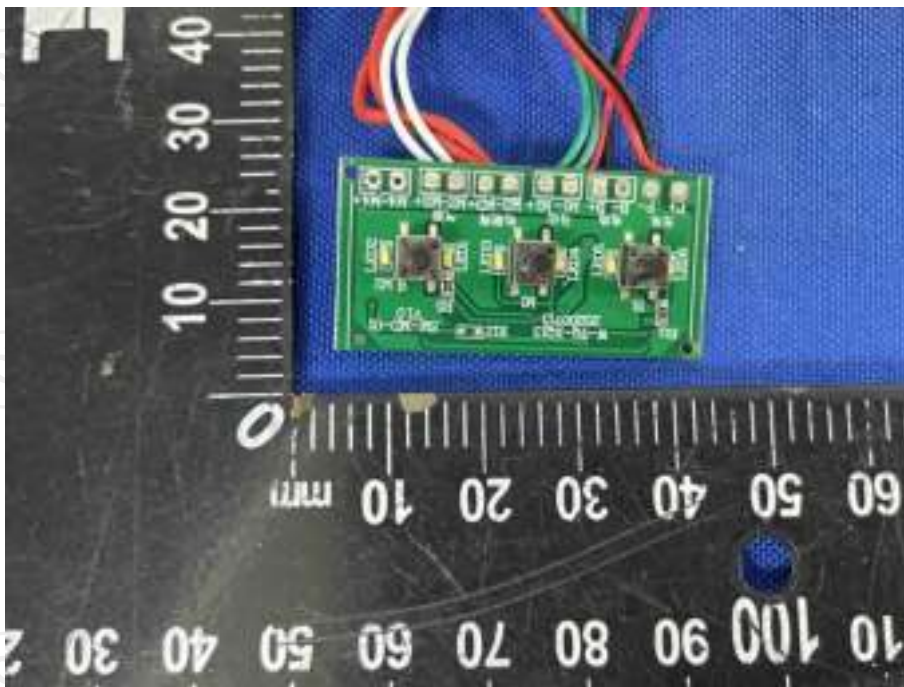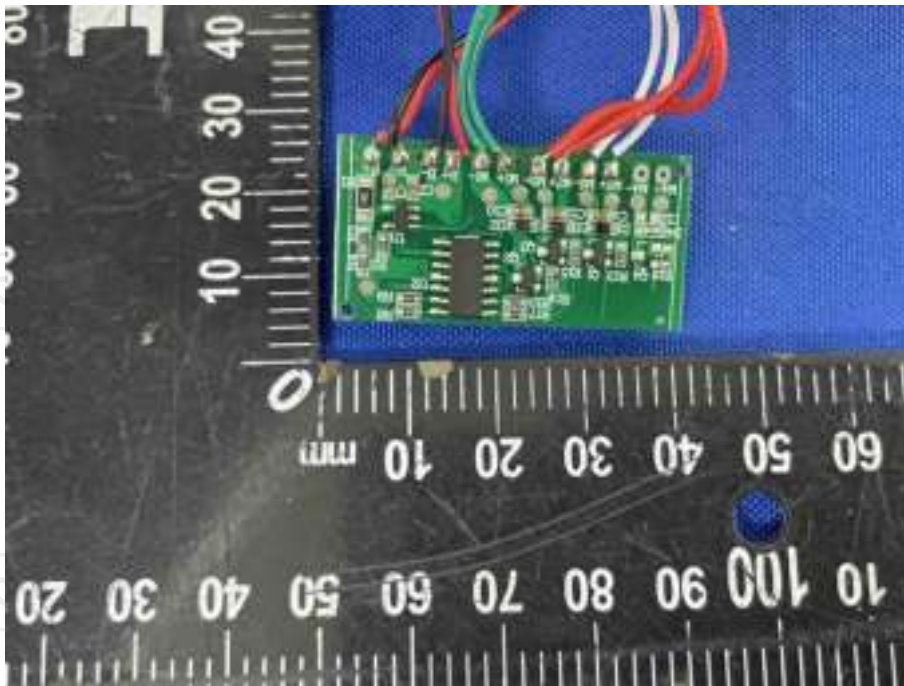

*****END OF REPORT*****