


## GHD30HL-BS

### Specifications

Model NO.	GHD30HL-BS	
Upgrade From	_____	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	30 Ah	
Dimensions	Length	166 mm (6.54 inches)
	Width	130 mm (5.12 inches)
	Height	175 mm (6.89 inches)
	Total Height	175 mm (6.89 inches)
Approx. Weight	9.83 kg (21.67 Lbs)	
Charge Current (A)	3.0A (14.4V constant voltage charge)	



### Dimensions

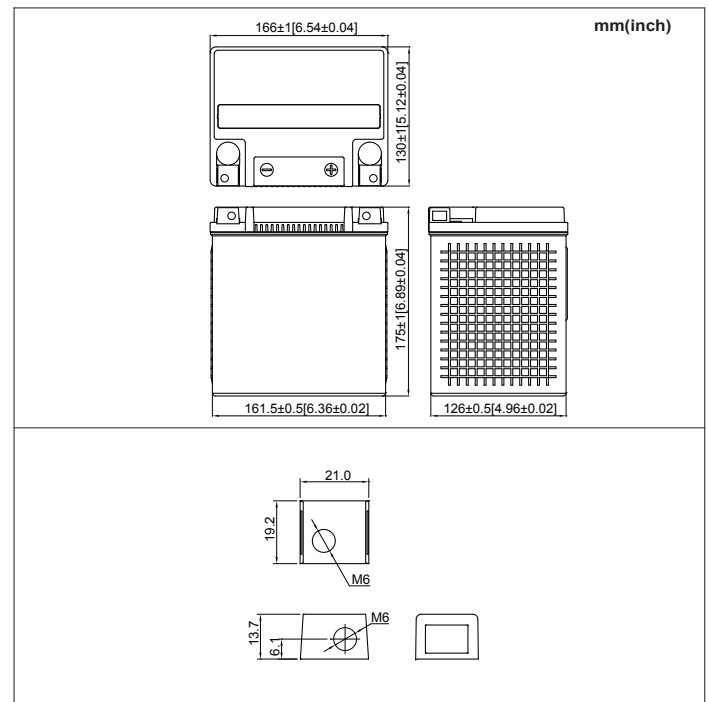

### Characteristics

Capacity 25°C(77°F)	10 hours rate (3.0 A to 10.5V)	30.0Ah
	5 hours rate (6.0 A to 10.2V)	25.5Ah
	1C (30.0A to 9.6V)	13.5Ah
	3C (90.0A to 9.6V)	10.8Ah
Cranking Amperes(by Midtronic Tester)	530 A	
Cold Cranking Amperes(-18°C SAE Standard)	430 A	
Cold Cranking Amperes(-18°C EN Standard)	430 A	
Internal Resistance (at 1KHz)	Approx.8 mΩ	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-30°C (-22°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	60% depth of discharge 250 cycles	
	30% depth of discharge 400 cycles	
Charge Retention (self-discharge life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Warranty	2 years	
Case Material	ABS	

