


80 PLUS BRONZE ... 115V/60Hz

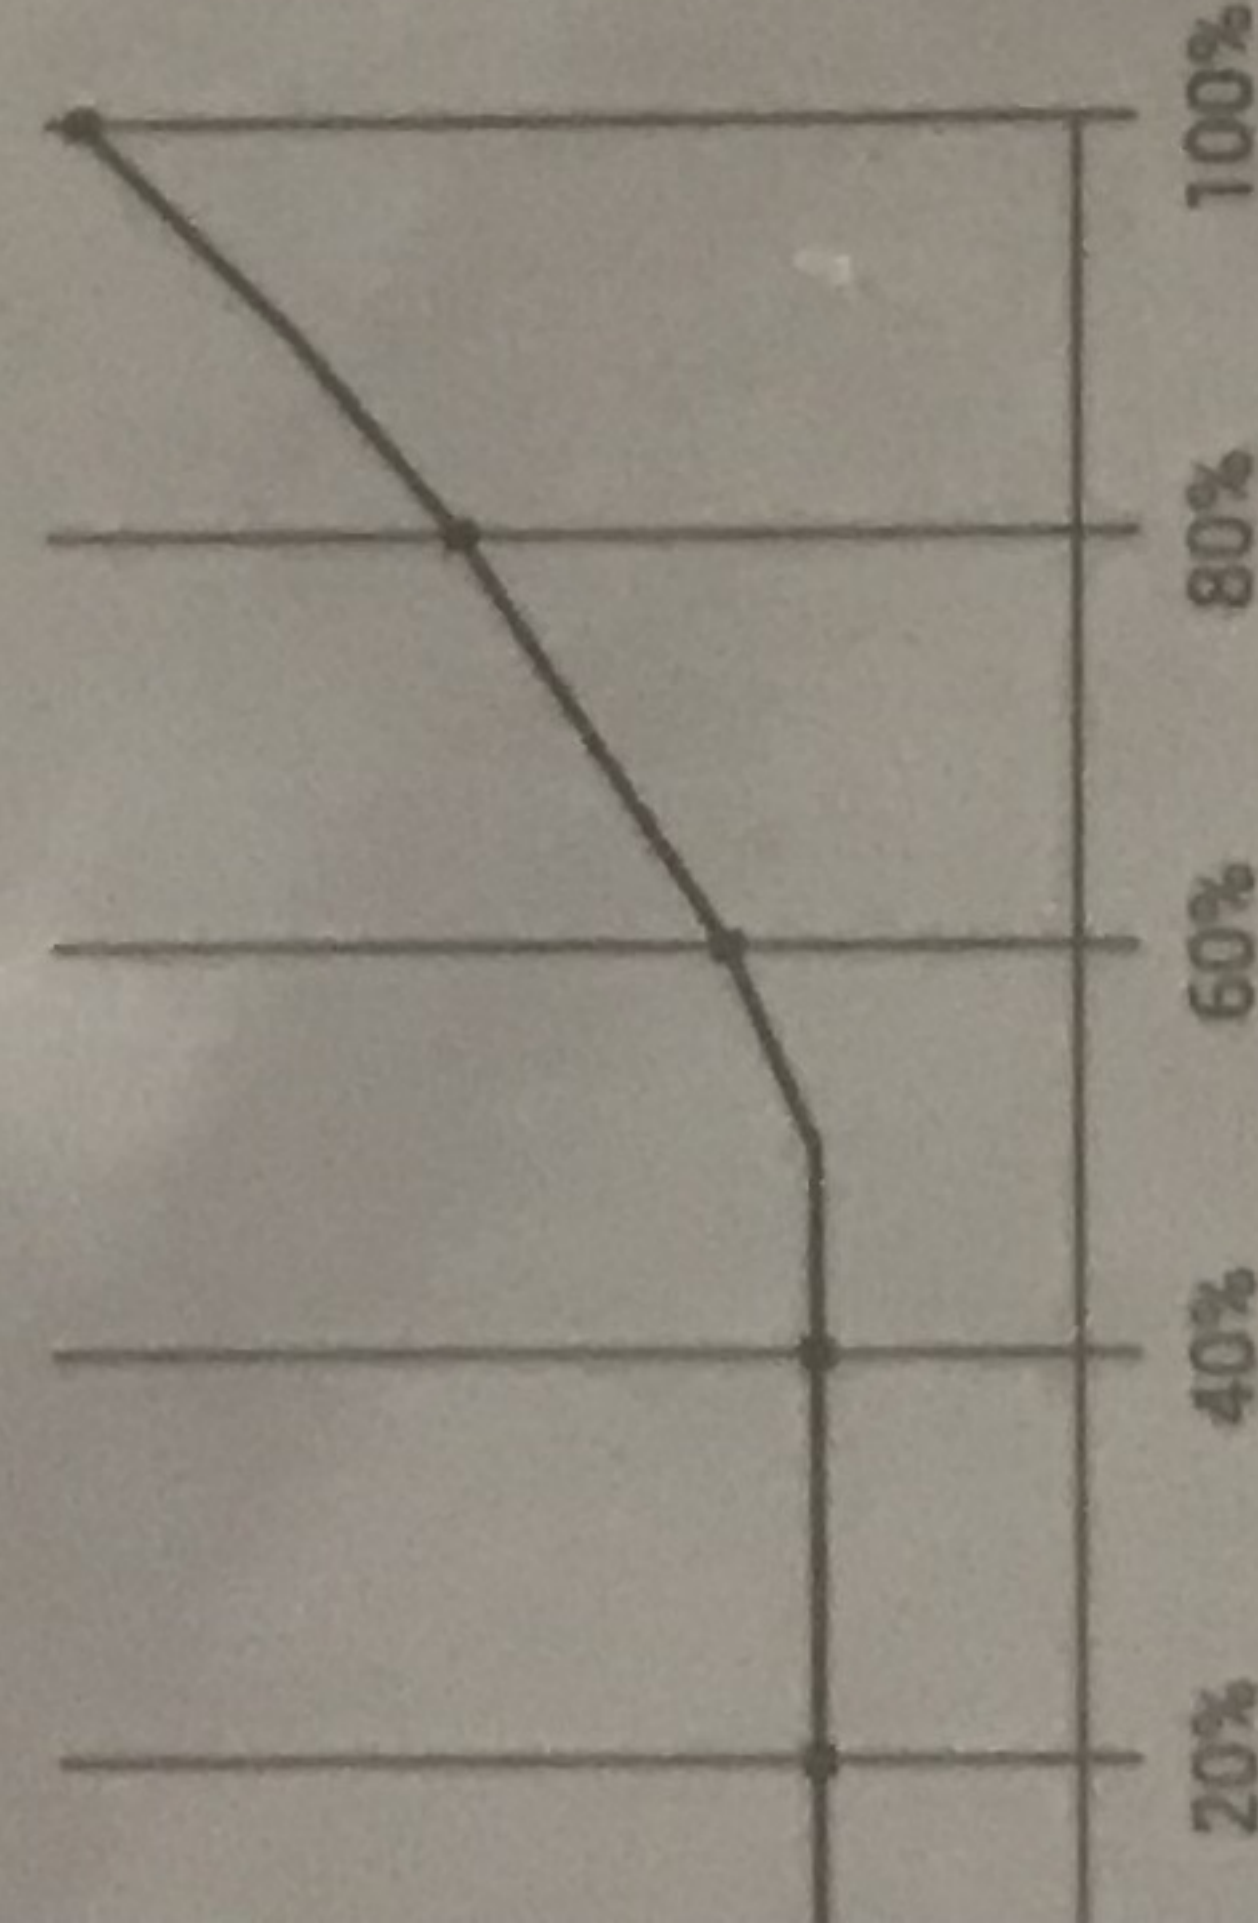

FAN SPEED(RPM)

Website at: www.deepcool.com

User Website: www.deepcool.com

Internet: www.deepcool.com

Web page: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com

Website: www.deepcool.com



Website: www.deepcool.com

Website: www.deepcool.com

Model No.	PK750D-F20
Type	ATX12V V2.4
Product Dimensions	150×140×86mm (W x L x H)
80PLUS Certifications	Bronze
Fan Size	120mm
Fan Bearing	Hypro Bearing
Topology	Active PFC+DC to DC
Capacitors	Taiwan capacitor
Power Good Signal	100-150ms
Hold Up Time	≥16ms(80% Load)
Efficiency	≥85% Under Typical Load(50% Loading)
Protection	SCP,OPP,OT,POVP,OC
Operation Temperature	0-40°C
Erp Regulation	ErP 2013
MTBF	100,000 Hours
Warranty	5 Years

AC Input	100-240Vac	10A-5.0A	50-60Hz		
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output Current	20A	20A	62.5A	0.3A	2.5A
Max Combined Wattage	120W		750W	3.6W	12.5W
Total Output	750W				

Cable type	Non-Modular, Black Flat Cable	
Connector	Number of Cable	Cable Length
Main Power Connector (20+4)Pinx1	1	500mm
CPU(4+4)Pin x 2	1	620mm+120mm
PCI-E(6+2)Pin x 2	2	500mm+120mm
SATA x 4	2	400mm+100mm+100mm+100mm
4Pin Peripheral x 4	1	400mm+100mm+100mm+100mm

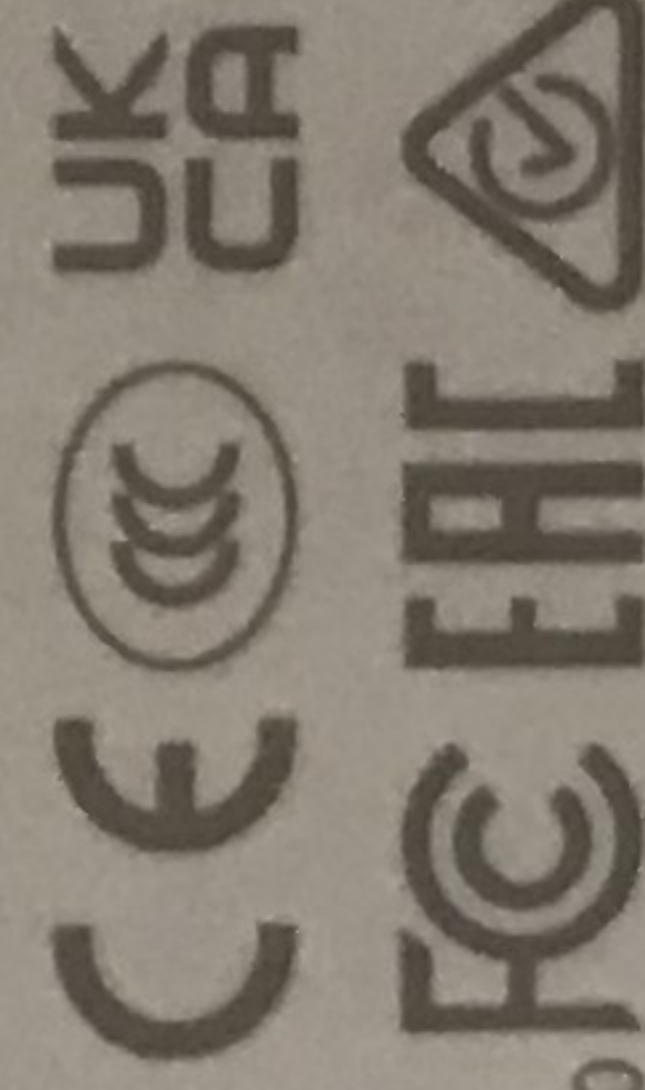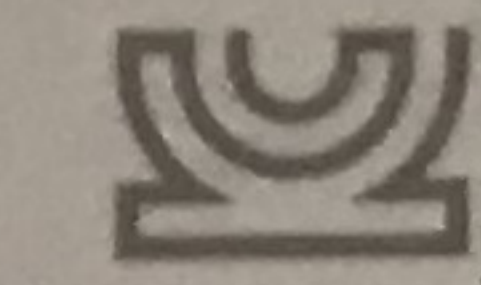


IS-13252(PART1) / CAN ICES-003(B) / IEC 60950-1 NMB-003(B)

R-41178519
www.bis.gov.in


XU100111-22102A
R-R-XQS-PK800D-F20

10000124290CA224000912

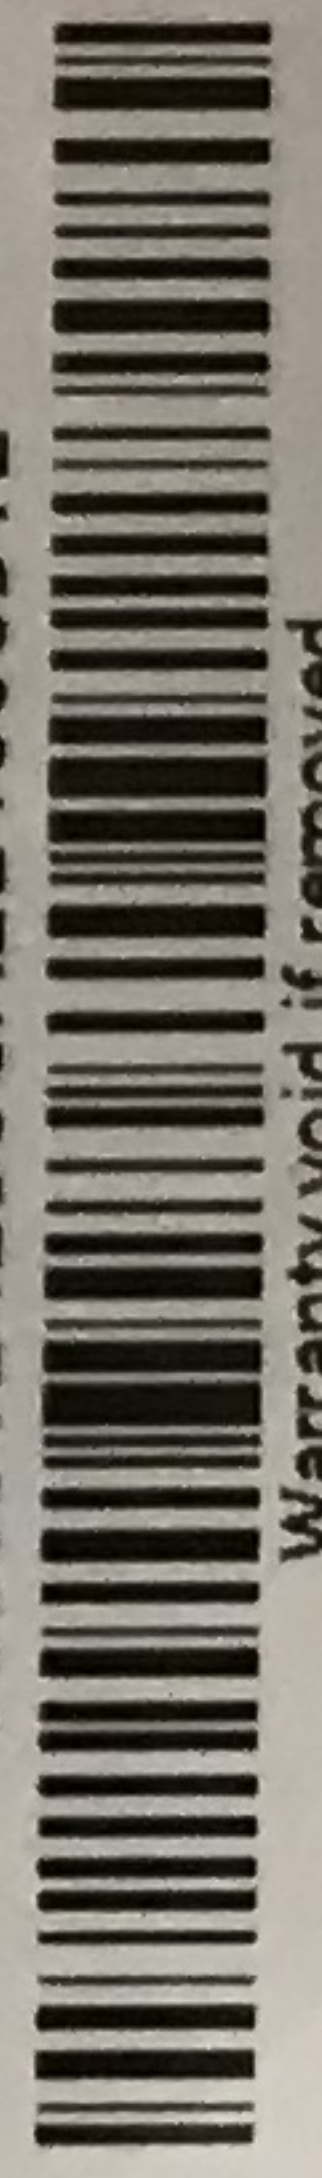

Warranty void if removed

R-PK750D-FA0B-EU

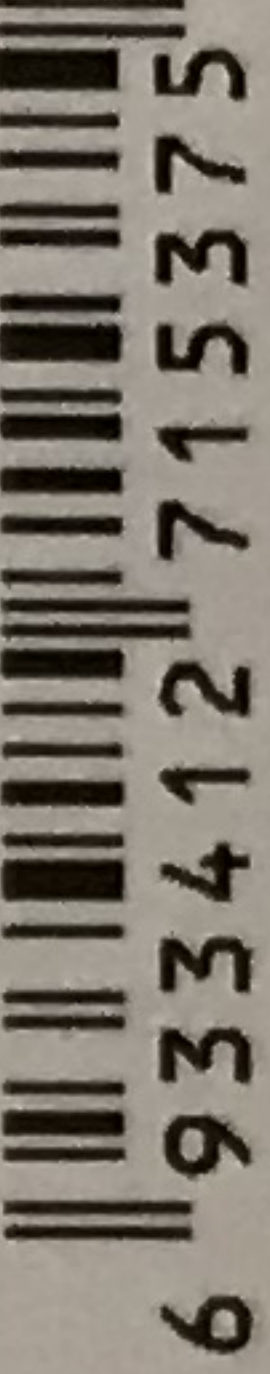

6 933412 715375

MADE IN CHINA