


Product Description

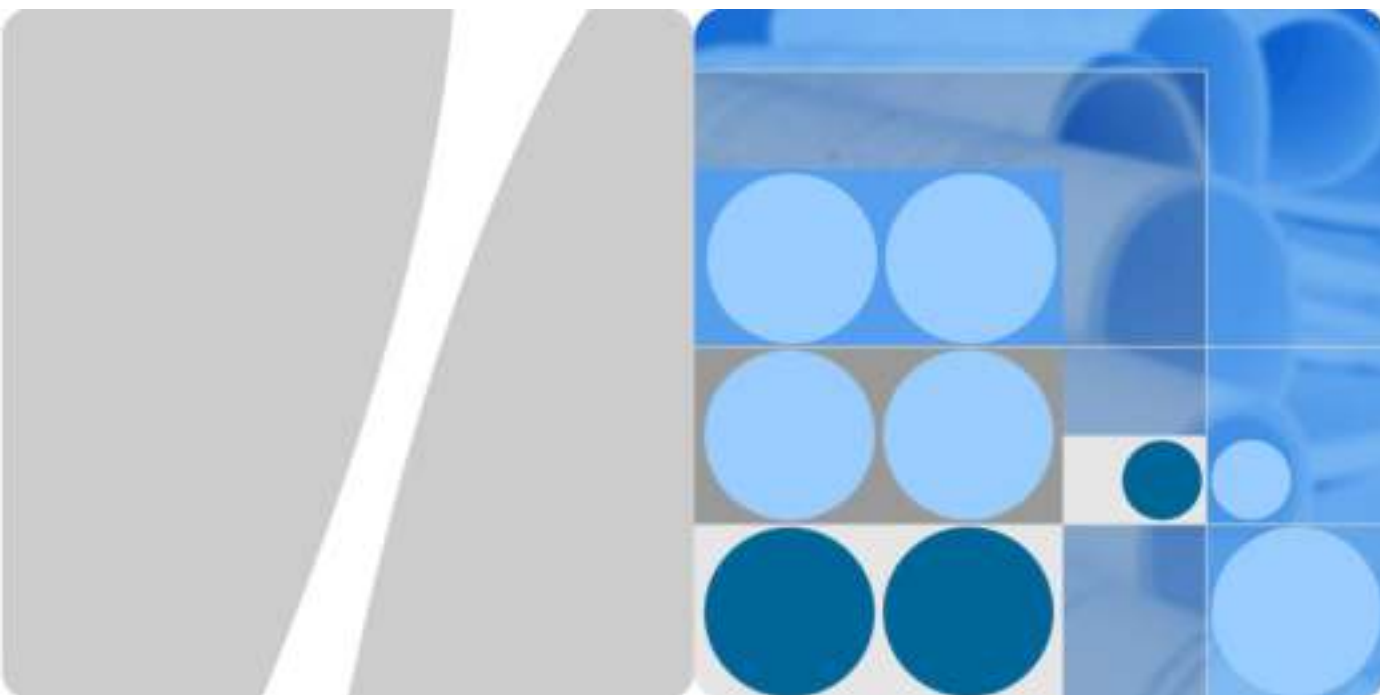

HUAWEI E5785-92c Mobile WiFi
V100R001

Version 03
Date 2019-09-02

HUAWEI TECHNOLOGIES CO., LTD.





Huawei Technologies Co., Ltd. provides customers with comprehensive technical support and service. Please feel free to contact our local office or company headquarters.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: <http://consumer.huawei.com/en/>

Copyright © Huawei Technologies Co., Ltd. 2019. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

About This Document

Summary

This document introduces the major functions, supported services, and system architecture of the HUAWEI E5785-92c Mobile WiFi.

The following table lists the contents of this document.

Chapter	Details
1 Overview	Supported network modes, basic services and functions, and the appearance of the product
2 Features	Major features and technical specifications
3 Services and Applications	Supported services
4 System Architecture	System architecture
5 Packaging Box Items	Items contained in the packaging box
6 Appendix	Supported LTE bandwidths

History

Version	Details	Date
01	First release	2019-05-22
02	Changed the “LTE Category 7” to “LTE Category 6”.	2019-07-03
03	Updated the weight with package.	2019-09-02

Contents

1 Overview	6
1.1 Introduction.....	6
1.2 Optional Features.....	7
2 Features	8
2.1 Main Features	8
2.2 Technical Specifications	9
2.2.1 Hardware	9
2.2.2 Software.....	12
3 Services and Applications	14
3.1 Data Service.....	14
3.1.1 Wireless Modem.....	14
3.1.2 USB Modem	14
3.1.3 LTE/3G/Wi-Fi Auto Offload	15
3.2 SMS.....	15
3.3 Menu Display.....	15
4 System Architecture	17
4.1 System Architecture	17
4.2 Functional Modules	18
5 Packaging Box Items	19
6 Appendix	20
A Acronyms and Abbreviations	21

1 Overview

1.1 Introduction

HUAWEI E5785-92c Mobile WiFi (hereinafter referred to as the E5785-92c) is a high-speed packet access mobile hotspot. It is a multi-mode wireless terminal for SOHO (Small Office and Home Office) and business professionals.

It provides users with packet data services and SMS through multiple network modes. You can connect the micro USB port on the E5785-92c to a computer using a micro USB data cable, or connect multiple devices to the E5785-92c over Wi-Fi. In the service area of the network, the E5785-92c allows you to surf the Internet and send/receive messages/emails, providing you with a fast, reliable, and convenient user experience. It also helps carriers improve their average revenue per user (ARPU).

Figure 1-1 shows the appearance of the E5785-92c.

Figure 1-1 E5785-92c appearance





1.2 Optional Features

Optional features refer to features that are not supported on the standard version. These features can be customized according to carrier or customer requirements. The E5785-92c's optional features include the following:

- SIM lock

2 Features

2.1 Main Features

The E5785-92c features:

- LTE Category 6
- LTE FDD CA (DL) packet data service of up to 300 Mbps
- LTE FDD (DL) packet data service of up to 150 Mbps
- LTE FDD (UL) packet data service of up to 50 Mbps
- LTE TDD CA (DL) packet data service of up to 224 Mbps
- LTE TDD (DL) packet data service of up to 112 Mbps
- LTE TDD CA(UL) packet data service of up to 20 Mbps
- LTE TDD (UL) packet data service of up to 10 Mbps
- DC-HSPA+ (DL) packet data service of up to 42 Mbps
- DC-HSPA+ (UL) packet data service of up to 5.76 Mbps
- HSPA+ (DL) packet data service of up to 21 Mbps
- HSPA+ (UL) packet data service of up to 5.76 Mbps
- HSDPA (DL) packet data service of up to 14.4 Mbps
- UMTS (UL/DL) packet data service of up to 384 Kbps
- SMS based on LTE/UMTS
- Built-in LTE/UMTS and Wi-Fi antenna
- 2.4 GHz and 5 GHz Wi-Fi
- LTE/3G/Wi-Fi auto offload
- Menu display
- Compatible with HUAWEI SmartHome app
- Plug and Play
- IPv4v6 dual stack
- Built-in DHCP Server, DNS RELAY, and NAT
- Online software upgrade
- Traffic statistics
- WPS
- 1.45 inch LCD display

- Standard Micro USB port
- Compatible with Windows 7, Windows 8, Windows 8.1, Windows 10 (excluding Windows RT), MAC OS X 10.9, 10.10, 10.11 and 10.12 with latest upgrades

2.2 Technical Specifications

2.2.1 Hardware

Table 2-1 lists the hardware specifications.

Table 2-1 Hardware specifications

Item	Specifications	
Technical standard	WAN: LTE/DC-HSPA+/HSPA+/HSPA/UMTS	
	Wi-Fi/WLAN: IEEE 802.11a/b/g/n/ac	
Operating frequency	LTE FDD: B1/B3/B7/B8/B20 LTE TDD: B38/B40/B41 (2555~2655MHz) /B42(3500~3600MHz) /B43 LTE CA: B1+B3, B1+B8, B1+B20, B3+B7, B3+B8, B3+B20, B3+B42, B3+B43, B7+B20 UL CA: Intra-Band continuous: B42+B42,B43+B43 DL CA: Intra-Band continuous: B3+B3, B7+B7, B38+B38, B40+B40, B41+B41, B42+B42, B43+B43 Intra-Band non-continuous: B3+B3, B41+B41 See Appendix for supported LTE channel bandwidths	
	DC-HSPA+/HSPA+/HSPA/UMTS: Band1 (2100 MHz)/Band 8 (900 MHz)	
	Wi-Fi/WLAN: 2.4 GHz	
	Wi-Fi/WLAN: 5 GHz	
Memory	RAM: 256 MB DDR	
	ROM: 256 MB NAND Flash	
Transmit power	LTE: Conforms to Power Class 3 Definition	
	WCDMA/HSPA/HSPA+: Conforms to Power Class 3 Definition	
	Wi-Fi/WLAN 2.4 GHz	802.11b: 14 dBm
		802.11g: 13 dBm
		802.11n: 13 (20 MHz)/12.5 (40 MHz) dBm
Wi-Fi/WLAN	802.11a: 14 dBm	



Item	Specifications	
	5 GHz	802.11ac: 13 (20 MHz)/12(40 MHz)/12(80 MHz) dBm
		802.11n: 14 dBm
	Note: The value above represents a typical transmit power in Wi-Fi/WLAN mode, and may vary slightly by device.	
Receiver sensitivity	LTE: Conforms to 3GPP	
	WCDMA/HSPA/HSPA+: Conforms to 3GPP	
	Wi-Fi/WLAN 2.4 GHz	802.11b: -76 dBm@11 Mbps
		802.11g: -65 dBm@54 Mbps
		802.11n: -64 dBm@65 Mbps
	Wi-Fi/WLAN 5 GHz	802.11a: -65 dBm@54 Mbps
		802.11ac: -64 dBm@65 Mbps
802.11n: -64 dBm@65 Mbps		
Wi-Fi/WLAN speed	802.11a: Up to 54 Mbps	
	802.11b: Up to 11 Mbps	
	802.11g: Up to 54 Mbps	
	802.11n:	HT20: Supports MCS0–MCS7; Up to 72.2 Mbps. Supports MCS8–MCS15; Up to 144.4 Mbps. HT40: Supports MCS0–MCS7; Up to 150 Mbps. Supports MCS8–MCS15; Up to 300 Mbps.
	802.11ac: Up to 867 Mbps	
Power consumption	<4 W	
Charger (Optional)	AC: 100–240 V	
	DC: 5 V, 2 A	
Battery	Type: Rechargeable lithium battery (removable)	
	Capacity: 3.8 V, 3000 mAh	
	Maximum working hours: 12 (depending on the network)	
	Maximum standby hours: 700 (depending on the network)	
External ports	Micro USB port	



Item	Specifications	
	Mini-SIM card slot (3FF)	
Display	1.45 inch LCD display	
Buttons	Power button, RESET button, MENU button	
Antenna	Built-in LTE/UMTS main antenna	
	Built-in LTE/UMTS diversity antenna	
	Built-in WLAN antenna	
Dimensions (W × D × H)	Mobile WiFi	108 mm x 62 mm x 17.3 mm
	With package	125 mm x 85 mm x 60 mm
Weight	Mobile WiFi	Approximately 125 g (including the battery)
	With package	Approximately 185 g
Temperature	Operating temperature: 0°C to 35°C	
	Storage temperature: - 20°C to +60°C	
Humidity	5% to 95% (non-condensing)	

2.2.2 Software

Table 2-2 lists the software specifications.

Table 2-2 software specifications

Item	Description
SMS	<ul style="list-style-type: none">• Write/send/receive short messages• Send/receive extra-long messages• Storage: Up to 500 messages can be saved in the internal memory of the E5785-92c
Network connection setup	<ul style="list-style-type: none">• Create, delete, or edit APN• Set up network connection
WLAN/Wi-Fi setup	<ul style="list-style-type: none">• SSID broadcasting and hiding• None (Open), WEP, WPA2-PSK, and WPA/WPA2-PSK encryption• Automatic adjustment of Wi-Fi speed• Display STA status• Turn off Wi-Fi automatically• MAC address filtering• Guest SSID
Firewall setup	<ul style="list-style-type: none">• Enable and disable firewall• LAN IP Filtering• Virtual Server• DMZ• UPnP
NAT setup	<ul style="list-style-type: none">• CONE NAT• Symmetric NAT• ALG
DHCP setup	<ul style="list-style-type: none">• Enable and disable DHCP server• Configure DHCP server address pool• Set DHCP lease time
LTE/3G/Wi-Fi auto offload (Wi-Fi Extender)	<ul style="list-style-type: none">• Access WAN via LTE/3G/Wi-Fi
IPv4v6 dual stack	<ul style="list-style-type: none">• DHCPv4v6 server and client• DNSv4v6 server and client• Display IPv4v6 WAN address
Others	Network connection settings: Automatic/manual network selection and registration



Item	Description
	Display network status including signal strength, carrier name, system mode, and so on Select network mode PIN management: activate/deactivate PIN, verify PIN/PUK, and modify PIN
System requirements	<ul style="list-style-type: none">• Windows 7, Windows 8, Windows 8.1, Windows 10 (excluding Windows RT). Mac OS X 10.9, 10.10, 10.11 and 10.12 with latest updates• Your computer should also meet the recommended hardware requirements for the operating system installed

3 Services and Applications


3.1 Data Service

3.1.1 Wireless Modem

The E5785-92c can be used as a wireless modem when the Wi-Fi is enabled. You can directly use the default settings (or configure APN on the E5785-92c's web-based management page) to set up a wireless network, after which you will be able to access the Internet.


When only the 2.4 GHz or 5 GHz Wi-Fi network is enabled, the E5785-92c supports the connection of up to 16 wireless devices at the same time. When both the 2.4 GHz and 5 GHz networks are enabled, up to 8 devices can connect to the 2.4 GHz Wi-Fi network and another 8 devices can connect to the 5 GHz Wi-Fi network.

Figure 3-1 Multi-device access via Wi-Fi and micro USB port at the same time

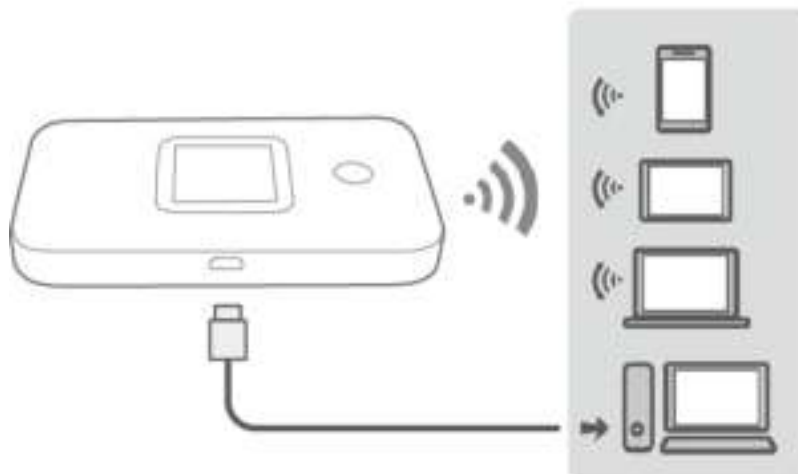


3.1.2 USB Modem

After you connect the E5785-92c and a PC with a USB data cable, the E5785-92c's web-based management page will display on the PC desktop automatically. You can directly use the default APN settings (or configure the APN on the page) to set up a network connection, after which you can access the Internet.

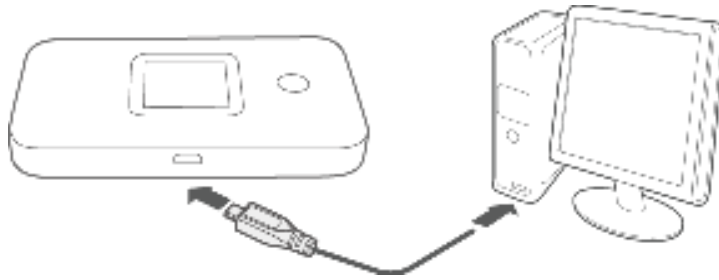Figure 3-2 One-device access via micro USB port

3.1.3 LTE/3G/Wi-Fi Auto Offload

The E5785-92c allows you to access the Internet via LTE, 3G or Wi-Fi. When you are using the E5785-92c in areas with a Wi-Fi hotspot, for example, an airport, a cafe, a hotel, or your home, the E5785-92c switches to the Wi-Fi network automatically to save your LTE/3G network data usage.

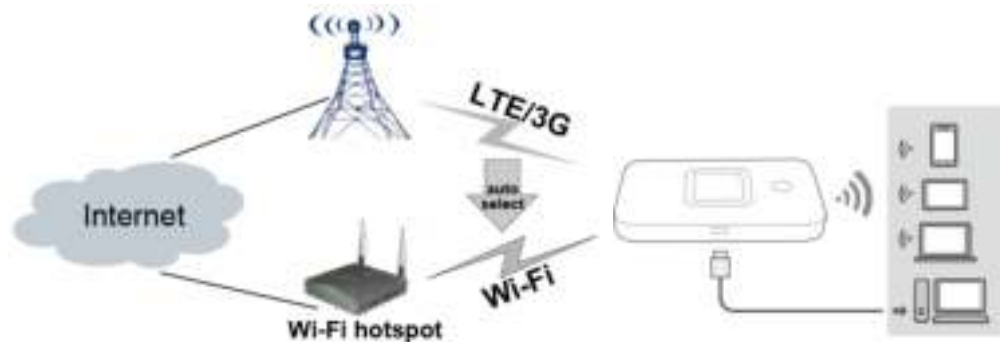Figure 3-3 LTE/3G/Wi-Fi auto offload

3.2 SMS

The E5785-92c supports message writing/sending/receiving. You can manage messages in the Inbox, Outbox, and Drafts on the E5785-92c's web-based management page.


3.3 Menu Display

The E5785-92c supports menu display in multiple languages. Press the MENU button to enter the menu. Continue to press the MENU button to select a menu and press the Power button to confirm your selection. You can view menu information or configure settings such as:

- LTE/3G/Wi-Fi auto offload
- WPS

Figure 3-4 shows the menu screen (your actual screen may vary).

Figure 3-4 Menu




4 System Architecture

4.1 System Architecture

Figure 4-1 shows the system architecture of the E5785-92c.

Figure 4-1 System architecture of the E5785-92c

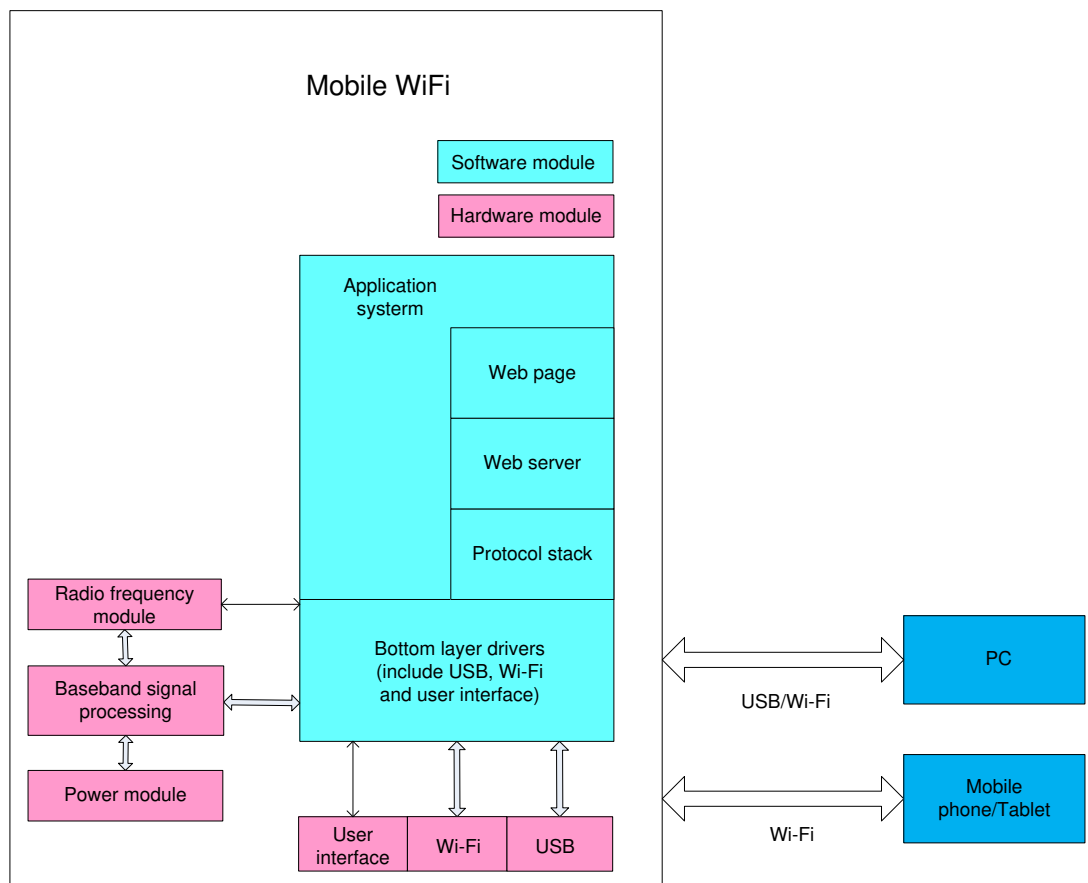

4.2 Functional Modules

1. **Radio frequency module:** Sends/receives radio signals and modulates/demodulates radio signals and baseband signals.
2. **Baseband signal processing module:** Processes LTE FDD/LTE TDD/DC-HSPA+/HSPA+/UMTS baseband signals, including:
 - Modulating/demodulating LTE FDD/LTE TDD/DC-HSPA+/HSPA+/UMTS baseband signals
 - Encoding/decoding LTE FDD/LTE TDD/DC-HSPA+/HSPA+/UMTS channels
3. **Bottom layer driver:** Drives peripherals, including USB devices, Wi-Fi devices, display screen, buttons and SIM cards.
4. **Protocol stack system:** Processes protocols of LTE FDD/LTE TDD/DC-HSPA+/HSPA+/UMTS and TCP/IP.
5. **Application system:** Provides SMS, PS domain service, Wi-Fi configuration, network service, web service and web-based management page. Users can configure system settings on the web-based management page.
6. **User interface:** Provides man-machine interaction, including a display screen and buttons.

5 Packaging Box Items

This chapter describes the items contained in the packaging box of the E5785-92c.

Table 5-1 lists the items contained in the packaging box of the E5785-92c.

Table 5-1 Packaging box items of the E5785-92c

Item	Quantity	Remarks
Mobile WiFi	1	Standard
Rechargeable battery (removable)	1	Standard
USB Cable	1	Standard
Quick Start Guide (Including safety information)	1	Standard
Charger	1	Optional
Warranty Card	1	Optional

6 Appendix

Table 6-1 Shows the LTE bandwidths supported by the E5785-92c.

Band	Bandwidth					
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
1			√	√	√	√
3	√	√	√	√	√	√
7			√	√	√	√
8	√	√	√	√		
20			√	√	√	√
38			√	√	√	√
40			√	√	√	√
41			√	√	√	√
42			√	√	√	√
43			√	√	√	√

A Acronyms and Abbreviations

Numerics

3G The Third Generation

A

AES Advanced Encryption Standard

ALG Application Level Gateway

APN Access Point Name

ARPU Average Revenue Per User

ASCII American Standard Code for Information Interchange

D

DHCP Dynamic Host Configuration Protocol

DMZ Demilitarized Zone

DNS Domain Name Server

E

EDGE Enhanced Data Rates for GSM Evolution

F

FDD Frequency Division Duplex

G

GPRS General Packet Radio Service

GSM Global System for Mobile Communications

H

HSPA+ High Speed Packet Access Plus

HSUPA High Speed Uplink Packet Access

HSDPA High Speed Downlink Packet Access

I

IEEE Institute of Electrical and Electronics Engineers

IP	Internet Protocol
L	
LCD	Liquid Crystal Display
LTE	Long Term Evolution
M	
MAC	Medium Access Control
Modem	Modulator Demodulator
N	
NAT	Network Address Translation
O	
OS	Operating System
P	
PC	Personal Computer
PIN	Personal Identification Number
PnP	Plug and Play
PS	Packet Switched
PUK	PIN unblocking key
S	
SIM	Subscriber Identity Module
SMS	Short Messaging Service
SOHO	Small Office Home Office
SSID	Service Set Identifier
T	
TDD	Time Division Duplex
TFT	Thin Film Transistor
U	
UMTS	Universal Mobile Telecommunications System
UPnP	Universal Plug and Play
USB	Universal Serial Bus
V	
VPN	Virtual Private Network
W	
WAN	Wireless Area Network



WEP	Wired Equivalent Privacy
Wi-Fi	Wireless Fidelity
WLAN	Wireless Local Area Network
WPA	Wi-Fi Protected Access