

EN

2020 V.05

SUPER73



OWNER'S HANDBOOK
ASSEMBLY & MAINTENANCE


SUPER73-ZI/ZG

WELCOME!


Please read this owner's handbook carefully before using your Super73 in order to become thoroughly familiar with the correct operation of your bike's controls, its features, capabilities, and limitations. This handbook includes safe riding tips, but does not contain any of the techniques and skills necessary to ride an electric bicycle safely.

Join the Supersquad community of riders wherever you are!

This is just the beginning of your adventure with us! We look forward to hearing about your experience and seeing you online on our social networks:

 [Instagram.com/Super73](https://www.instagram.com/Super73) and [Instagram.com/Super73eu](https://www.instagram.com/Super73eu)

 [Youtube.com/c/Super73](https://www.youtube.com/c/Super73)

 [Facebook.com/groups/Super73owners/](https://www.facebook.com/groups/Super73owners/)

Tag us! @Super73 @super73eu #Super73 #super73eu

tv

CONTACT SUPER73

North America:

SUPER73, Inc.
16591 Noyes Ave, Irvine,
California 92606
United States
+1 (814) 747-9072

customercare@super73.com
www.super73.com

Europe:

SUPER73 B.V.
Industrieweg 61
1115 AD Duivendrecht
The Netherlands
0031 (0)20 30 800 73

customercare-eu@super73.com
eu.super73.com

This handbook was drafted in the English language (Original instructions) and may have been translated into other languages as applicable (translation of Original instructions).

This handbook contains information on the Super73 electric bikes. Always store this Owner's Manual with the Super73 and refer to it for information whenever necessary. The information contained in this publication is based on the latest information available at the time of printing.

Please note all instructions and notices are subject to change and updates without notice. Please visit www.Super73.com for periodic tech updates.
Feedback: customercare@Super73.com

This is not to be reproduced wholly or in part without the written permission of Super73. ©Copyright 2020 Super73, Inc. , V05. Updated 09/2020.





TABLE OF CONTENTS

Contact Information.....	2
General Information.....	5
Diagram of ZI/ZG.....	6...
Legal Information.....	8
Intended Use.....	8
Unpacking Instructions.....	9
Assembly Instructions.....	10
Registration.....	13
Pre-Ride Safety Check.....	14
Operating the Bike.....	15
General Warnings.....	16
Safety.....	18
Maintenance Schedule.....	19
Maintenance and Components.....	20
Warranty.....	24



+ **MISSION STATEMENT** +

SUPER73 exists to create adventure and **community**. We strive to bolster adventurous exploration through **innovation**, create positive and forward-thinking experiences with **integrity**, and cultivate enthusiastic support and vision for the community.



GENERAL INFORMATION

Please note the following symbols:



WARNING!

Warnings, precautions, and potential risks associated with the use of your Super73.



Danger!

Possible dangers for your life and health if respective calls to action are ignored.



Tip!

Recommendation! Meaningful additional information.

Please perform a safety check before each use, as described on in the “Pre-ride Safety Check” section on pg. 15 of this handbook.

If you feel uncertain about proper configuration after assembling your Super73 according to the provided assembly instructions, please contact your specialized retailer or Super73 directly.



If any of the instructions are beyond your skill set, we recommend taking your Super73 to a certified E-Bike specialist or professional cycle mechanic for assembly.




This owner’s handbook includes assembly and maintenance work which may need to be done at frequent intervals to maintain an operational and safe Super73. Never perform work on your Super73 beyond instructions in this handbook. This handbook is not intended as a comprehensive use, service, repair or maintenance handbook. Do NOT ride your Super73 if it has been assembled incorrectly. Maintenance beyond what the owner’s handbook instructs is to be handled by an E-Bike specialist or professional cycle mechanic. Riding an incorrectly assembled bike can put your own safety at risk as well as others.


EUROPE - PREAMBULE

Super73 electric bikes purchased in Europe and sold for use in Europe have been tested, certified and are conform to security requirements of EPAC (Electric Power Assisted Cycle) according to EN 15194, have a maximum speed of 25 km/h and a 250 Watt motor power output. Principles of operation of a pedelec:

Your power-assisted bike is “assisted”. This means that, according to the legislation, you have to pedal continuously for assistance. The assist is active only during the pedaling movement. The assistance of your bike is cut beyond 25km/h as required by French and European regulations.

DIAGRAM OF THE SUPER73 ZI / ZG

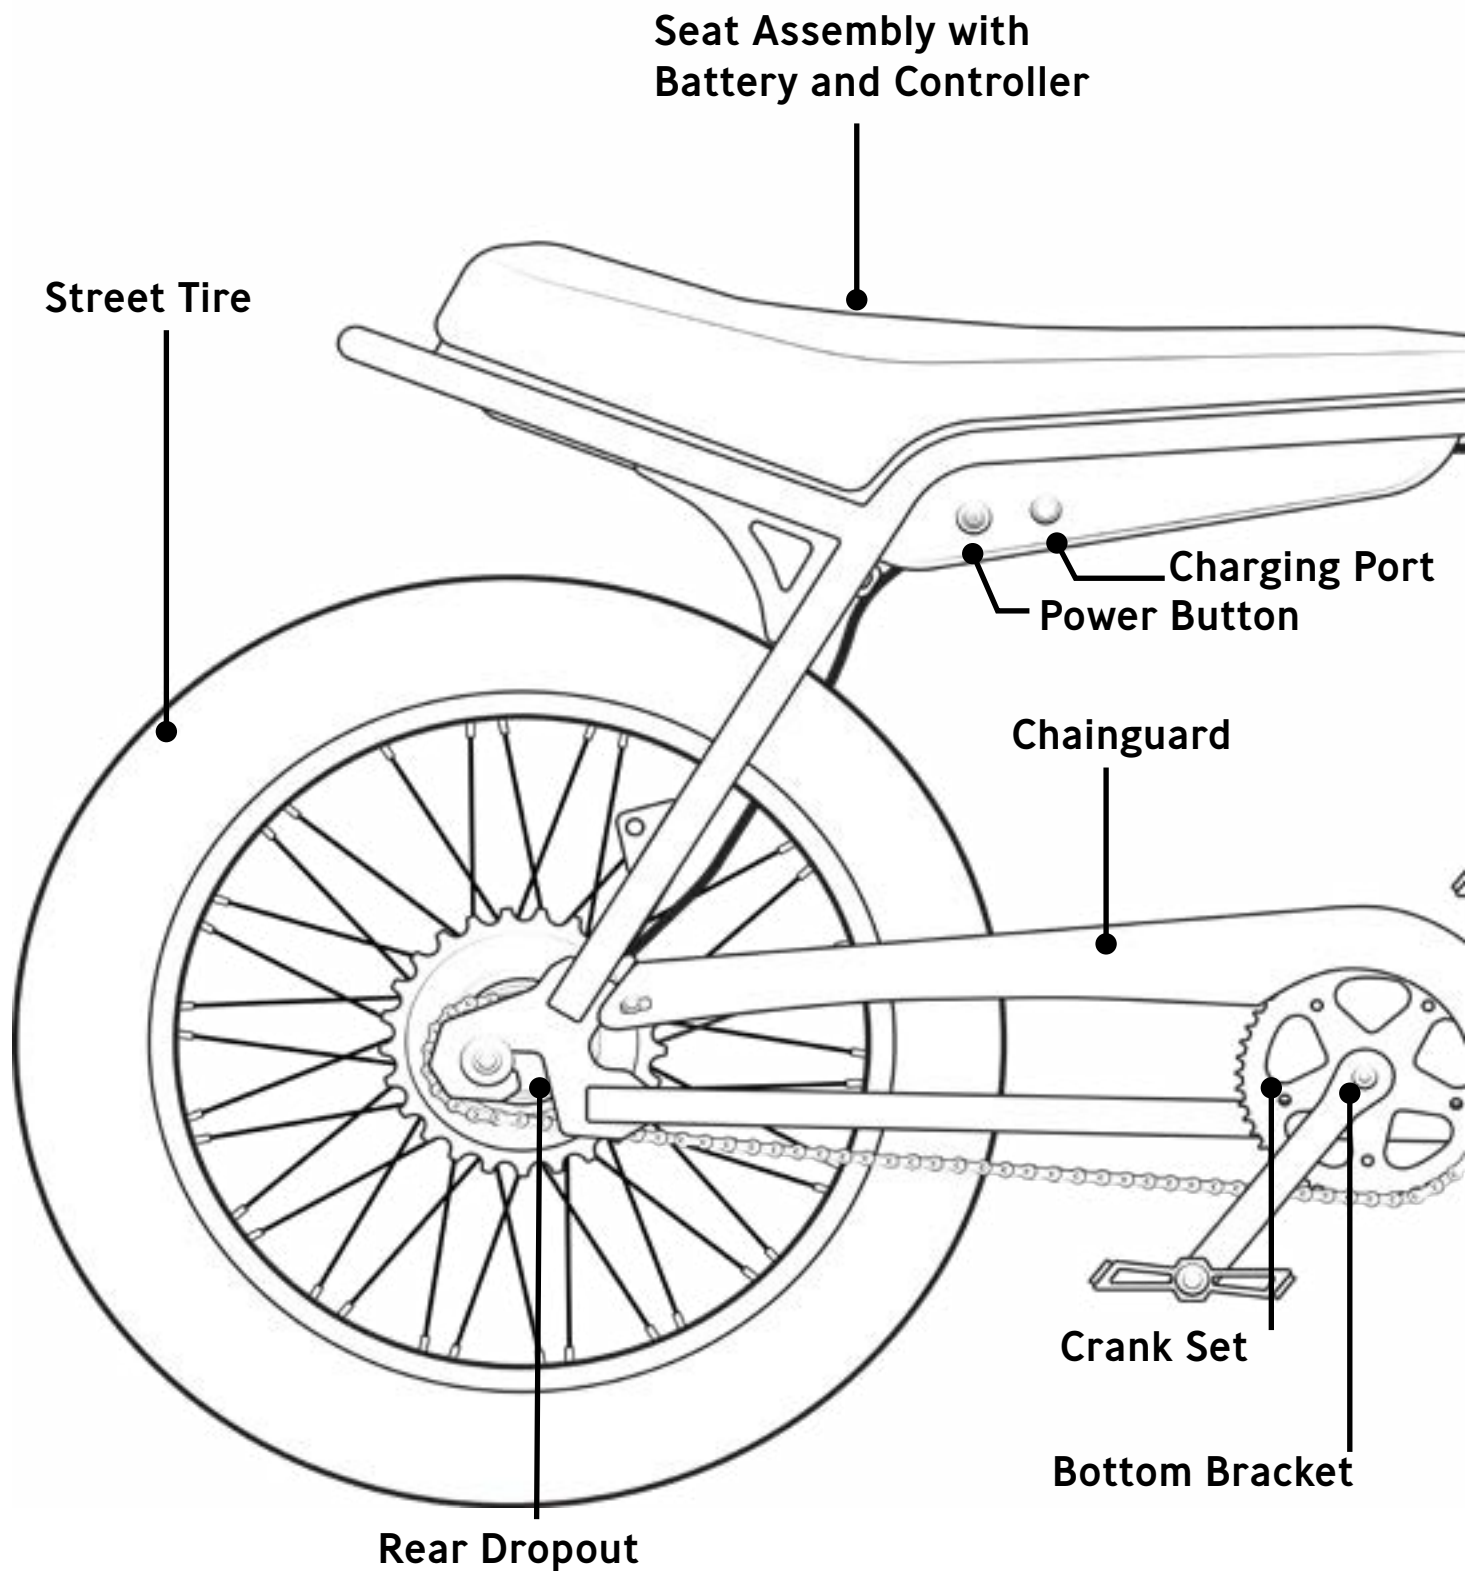

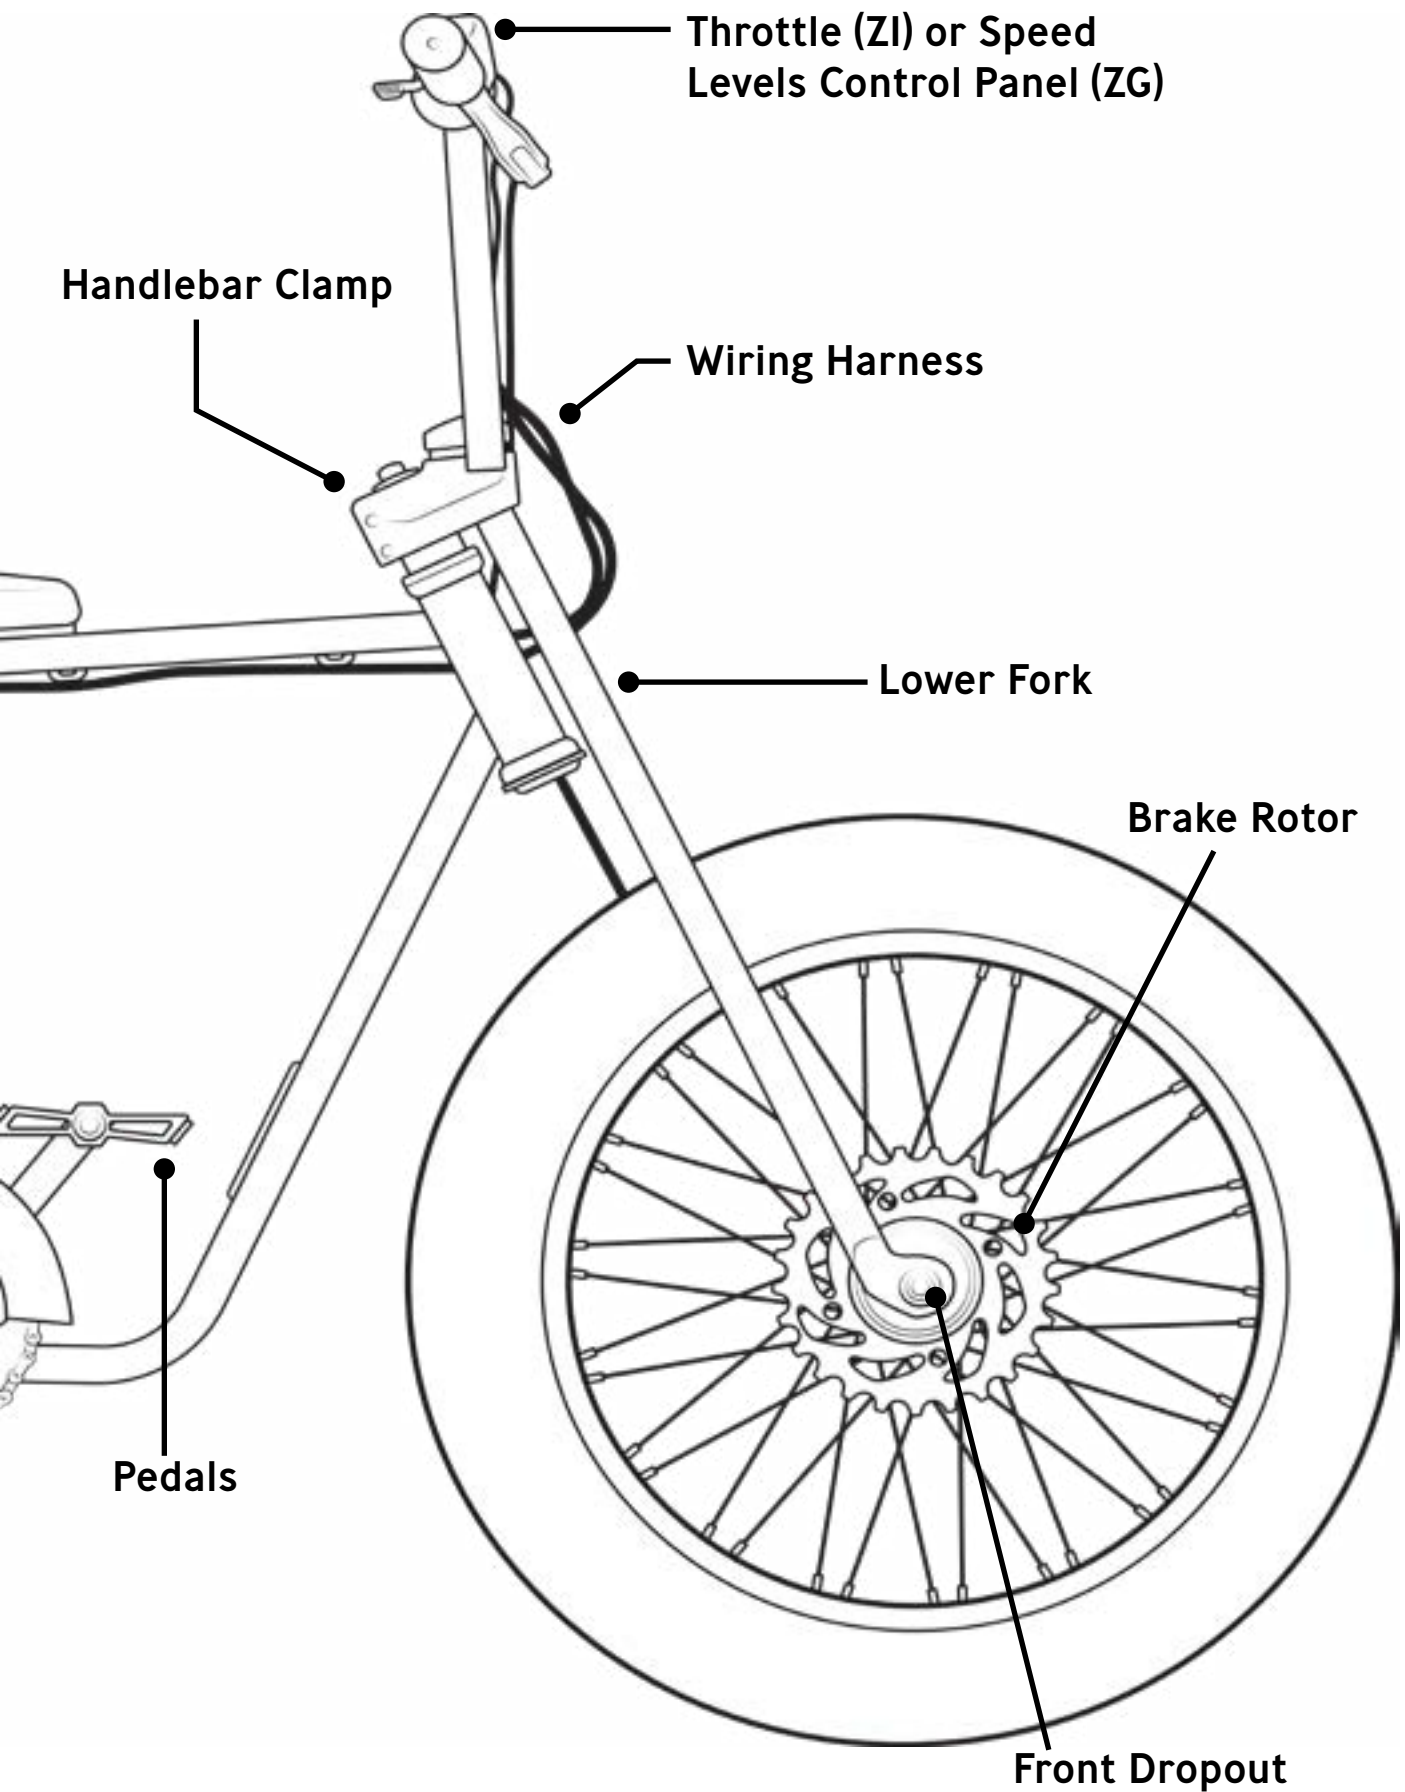

Throttle (ZI) or Speed Levels Control Panel (ZG)

Handlebar Clamp

Wiring Harness

Lower Fork

Brake Rotor

Pedals

Front Dropout

LEGAL REQUIREMENTS



Please check your country or state's regulations on electric bikes before riding. There are variations on age limit, speed, motor wattage, and road accessibility. Visit this website for more information: <https://peopleforbikes.org/our-work/e-bikes/policiesand-laws/>

In most European countries and Australia, the rules of public traffic valid for bicycles also apply to e-bikes traveling up to 25 km/h. However, there are some notable differences (such as the age limit of the cyclist). More information here: <http://bike-eu.com.s3-eu-central-1.amazonaws.com/app/uploads/2015/09/rules-regulation-on-electric-cycles-in-the-european-union-may-2017.pdf>

For the latest information on assembly and maintenance, please visit the support section of www.Super73.com or eu.super73.com

INTENDED USE

No liability or warranty shall be accepted if the use of the Super73 deviates from this intended use, if safety instructions are not observed, in the event of overloading, or if faults are not properly rectified. Similarly, no liability and warranty shall be accepted in the case of assembly errors, willful intent, accidents, and/or if care and maintenance specifications are not followed. Any modification or alterations to the electrical system (tuning) voids all claims under warranty and guarantees.

- Your Super73 electric bike is designed for use on paved paths only. You should therefore never ride on stairs, jump, or perform wheelies or similar activities.
- Super73 electric bikes are not approved for participation in competitions.
- Commercial use does not form part of the intended use.
- Operation parameters, maintenance, guidelines, and service instructions described in this manual are part of the intended use.



Please observe the permitted overall weight of 275 lbs (125 kg).



DANGER!

If the user rides the Super73 beyond its intended use, there may be a risk of an accident, serious injury, or death and the risk of injury to those around the user.

UNPACKING INSTRUCTIONS



DANGER!

Please read the instructions entirely before assembly to ensure the proper functioning of the Super73. Failure to do so could result in serious personal injury or damage to the bike.



VIDEO

View our assembly video to follow step-by-step instructions on our website in the Support section at www.super73.com.



A second person is recommended to help unpack and assemble your Super73

1. Remove the accessories box. Remove packaging and the two protective foam inserts.
2. Use two people to lift the bike out of the box and place on a clean flat surface.
3. Remove all protective packaging and prepare your new Super73 for assembly!
4. Please **read all assembly instructions in full** before beginning the build of your new bike.



If any serious damage has occurred to your Super73 during transit, please contact our customer support immediately and submit photos of the packaging.

IN THE PACKAGING

- 2 x reflectors
- 1 x battery charger
- 1 x set of pedals
- 1 x two-sided open-end wrench with 15mm and 13mm ends
- 1 x 5mm hex wrench

ADDITIONAL RECOMMENDED TOOLS

- 2.5 mm hex wrench
- 4 mm hex wrench
- Bicycle Grease

GOOD TO KNOW

- Bolts for the handlebars mount are M6 X 12mm socket head cap screws
- Right pedal has the letter "R" inscribed on it, the left pedal has the letter "L" inscribed on it.
- 5mm Allen key can also be used to adjust brakes.
- Tire tubes size is 20"x 4.25" or 20"x 4" for the rear and front tires with Schrader valve.



DANGER!

Before performing any work on your Super73, turn off the power system and remove the battery. Be sure to also turn off the power system and remove the battery during transport in a vehicle. Involuntary activation of the electrical assistance system presents a risk of damage or injury.

ASSEMBLY INSTRUCTIONS





DANGER!

Do not ride with a bike that has not passed 100% safety verification before each ride as described in the section pre-ride safety check on pg. 14.

I. HANDLEBAR INSTALLATION


- A. Use the **5mm hex wrench** to remove the bolts of the handlebar clamp.
- B. Once the clamp is open, place the lower crossbar of the handlebar in the groove of the top crown.
- C. Loosely tighten the handlebar clamp with the **5 mm hex wrench**, and adjust the angle of the handlebar to riders comfort.
- D. Cross tighten the handlebar clamp from corner to corner making sure the clamp is evenly placed, tight, and handlebars do not move.

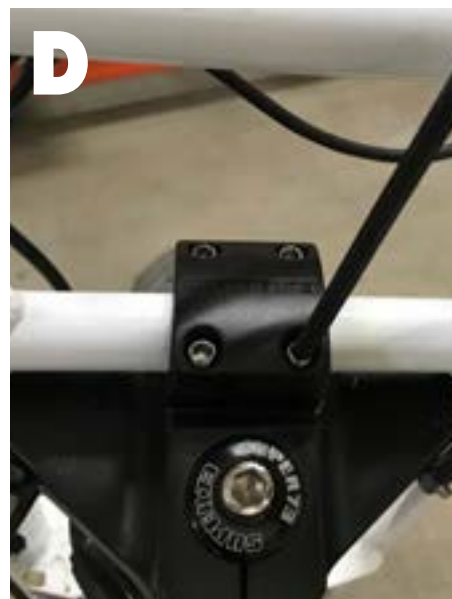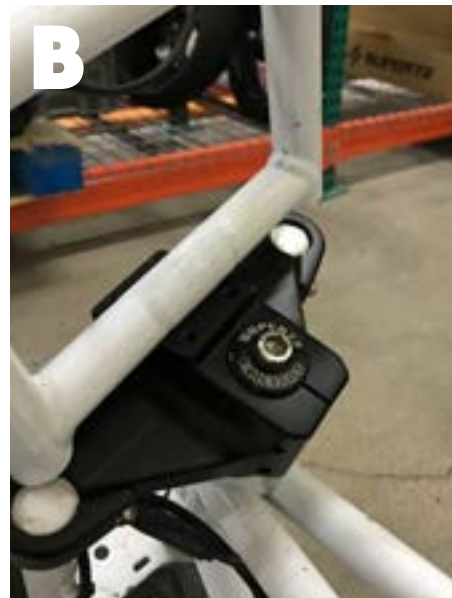

2. INSTALL PEDALS

- A. Install and tighten the pedals using the **15 mm open wrench**. Look for a letter marking "L" "R" on each respective pedal and make sure you install the left pedal on the left crank, the right pedal on the right crank.
- B. The right pedal is screwed on in a clockwise direction. The left pedal is screwed on by turning it counter-clockwise.

TIP It is recommended that you apply a small amount of bicycle grease to the threads of the pedals prior to installation.

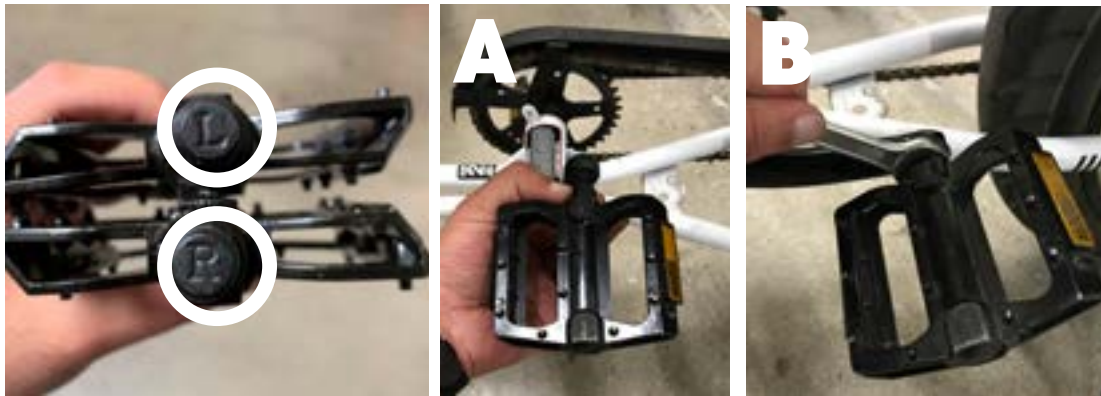

3. TIRE INFLATION

For transport purposes, tires are packed partially inflated. Tires must be inflated using a pump with a Schrader valve tip to a recommended 18 - 25 psi (1.24 - 1.72 bar).

- A. Inflate the tube to a max pressure of 30 PSI (2.06 bar) in order to ensure the tire is properly seated in the rim.
- B. Once properly seated, deflate to a recommended 18 - 25 psi (1.24 - 1.72 bar). PSI will vary based on the weight of rider and type of terrain.

TIP The inner tube size is 20"x 4.25" for the rear and the front.



5. CHARGE THE BATTERY



We recommend charging the battery for 6-8 hours on the first charge. This will help condition the lithium-ion cells for optimal performance.

The battery can be charged both mounted on the bike or separately from the bike. Two keys are supplied to unlock and lock the battery.

- A. Plug in the charger into a 120v wall outlet. Chargers can take 110-220V.
- B. Connect the charger cable to the battery charging port.
- C. Turn the battery on by pressing the power button. The battery is on when the power button illuminates. The battery will not charge unless it is switched on.

When the charging process starts, the charger LED turns red. Once the battery is charged, the LED turns green.

PROPERLY SHUTTING OFF THE BATTERY

- A. Turn the battery off by switching off the side button.
- B. Remove the charger cable from the battery charging port.
- C. Remember to put the protective cap back onto the battery charging port after charging to protect it from dirt and moisture.
- D. Unplug the charger from the socket.



Always make sure there is plenty of ventilation and a dry, fireproof environment for the charger and follow these operating instructions.

- Do not leave the battery connected to the active charger for more than 48 hours.
- Do not leave the charger connected to a socket for more than 48 hours.
- Charge the battery and use the bike at least once every 90 days.
- Do not store the bike for more than 24 hours with an empty battery. This prevents a deep discharge with irreparable consequences from occurring.
- Do not use the charger if the charger, main cable or connector cable have any visible signs of damage.
- After being charged, if the battery remains connected to the charger, it will turn on and off again in short spurts of green light. This is not a defect. It simply indicates that individual battery cells are being slowly charged. Nevertheless, make sure that the battery is not connected to the charger for more than 48 hours.



More information on battery care and range in the Maintenance and Components section on pg. 22 of this handbook.


BATTERY RANGE

Power output will vary depending on battery capacity. If your battery is at 20%, for example, it won't have as much power as a fully charged battery. If your Super73 has been shipped to you along with the battery, please fully charge the battery first. When a battery leaves the factory, it's not fully charged as required by international air and sea legislation. Battery is fully charged when the LED light on the charger is green.




More information on range and performance in Maintenance and Components section of this manual on pg. 23.

ASSEMBLY IS FINISHED!

 You're almost ready to ride. Your Super73 should look like below. **Before your first ride,** please verify your bike is safe to ride using the Pre-ride safety check on pg. 14.



REGISTER YOUR SUPER73

 **All original owners must register on our website to validate your warranty.**
Please register online at super73.com/pages/register
If you can't register online, please call us for assistance in registration. Write down below the following information for future reference:

Location or website of purchase: _____

Date of purchase: _____

Model name: SUPER73-Z1 or SUPER73-ZG

Bike Serial #: _____
(Engraved on the side of the bottom bracket in between the pedal cranks)

Battery #: _____

 We recommend that you keep your original receipt with this handbook.

PRE-RIDE SAFETY CHECK



DANGER!

Use the following checklist before each ride to verify your bike is safe to ride.



Make sure the brakes have already been applied before getting on to your bike.

CHECKLIST:

1. WHEELS

- Check the condition of both tires making sure the tread is in good condition free from punctures, cracks, and deformations.
- Maintain proper tire pressure. We recommend a range of 18 - 25 psi (1.24 - 1.72 bar) dependent on the weight of rider and type of terrain.
- Ensure wheels are true and properly dished.

2. BRAKES SYSTEM

- Pull both brake levers. You should feel an obvious pressure point and the levers should not be able to touch the handle.



More information on brakes in our Maintenance & Components section of this handbook.

3. CABLES

- Look out for any loose cables.
- Make sure the male and female plugs are properly connected.
- There should be no strain on any wiring near the fork when turning the handlebars from left to right.
- Verify that the wiring on the frame is secure and free from any moving parts that may damage the wiring. This includes any wires and brake cable lines near the wheel or other moving parts.

4. DISPLAY

- Check that your display turns on and functions properly.

5. KICKSTAND

- Make sure that the kickstand is tightly secured, and not rubbing against the ground or tires.



Do not sit on a bike with a kickstand engaged.



DANGER! Do not place any metal object into the charging port as this can result in a short circuit and render your battery nonchargeable and in need of replacement. This will void the warranty.

OPERATING THE BIKE

I. TURN ON THE BATTERY



2. Disengage the kickstand, grab the brake handle to engage the brakes, and seat yourself on the Super73.

3. POWER-ON THE DISPLAY

a. On displays with a throttle:

To turn the power on, press the gray push button and the LED lights will come on. The button will stay pressed in while the throttle is on. The LED lights indicate battery power level.



b. On displays without a throttle for pedal assist bikes, press the lower power button for a few seconds. There are a total of 5 LEDs that indicate the battery level in Red. When the PAS is adjusted, however, the same LEDs turn blue to indicate the Pedal Assist (PA)S level.

4. ENGAGE THE THROTTLE / PEDAL ASSIST

a. For throttle displays (ZI): The battery indicator lights will come on, indicating the bike is on and ready. Throttle is now live. Proceed with care on a flat surface as bike will move forward when the throttle is pressed.

b. For pedal assist displays (ZG), start pedaling and electric assist will engage. Press on the + button once to get to the first level of pedal assist. One bar will turn blue. Press a second time to reach the second level, and a third time to reach the third level.

5. BRAKING



The ZI / ZG employs the Tektro mechanical brake systems.

The RIGHT lever will activate the REAR brakes when compressed and the LEFT lever will activate the FRONT brakes when compressed.

- The brake levers are equipped with brake sensors that cut power to the motor when either of the levers are compressed.

6. TURNING OFF THE BIKE

When you are done riding your Super73 it is important to turn off the power properly.

a. Turn off the system by first pressing the gray button on the throttle or speed level control panel.



b. Shut off the power by pressing the power button on the battery.



GENERAL WARNINGS

Like any sport, cycling involves risk of injury and it is the rider's responsibility to assume potential risks and injury involved when riding. By choosing to ride a bicycle, you assume the responsibility for that risk. You need to know and practice the rules and safety regulations of riding this bicycle. Proper use and maintenance of your bicycle reduces risk of injury. Check your local state or country regulations for electric bike laws. For example, check the minimum age for using an electric bike as this differs in various regions.

Riders must have the physical condition, reaction time, and mental capability to ride and manage traffic, road conditions, and sudden situations. Also, respect the laws governing E-bike use in accordance with each region. If you have an impairment or disability (i.e. visual impairment, hearing impairment, physical impairment, cognitive/language impairment, seizure disorder, etc.), consult your physician before riding any bicycle.

NOTICE: Only take on tasks for which you have the necessary knowledge and tools. It is recommended that users pay special attention to all of the general operating rules below before operating their Super73 bike.

- When riding, obey the same road laws as all other road vehicles, including giving right of way to pedestrians and stopping at red lights and stop signs.
- For additional information, contact the road traffic authority, police department or Department of Motor Vehicles in your state or country.
- Use correct hand signals to indicate turning or stopping.
- Concentrate on the path ahead. Avoid potholes, gravel, wet or oily roads, curbs, trains, tracks, speed bumps, and other obstacles.
- Walk your bike across all train tracks.
- Expect the unexpected, such as opening car doors or cars backing out of driveways
- Be aware at intersections and when preparing to pass other vehicles or other cyclists.
- Familiarize yourself with all the bike features. Practice using the brakes and throttle.
- If you are wearing loose pants, secure the bottom using leg clips or elastic bands to prevent them from being caught in the chain.
- Wear proper riding clothes and avoid wearing open-toe shoes.
- Don't carry passengers or cargo that will interfere with your ability to control the bicycle.
- Never ride and use the your phone simultaneously.
- Don't use music devices such as headphones while riding. This will restrict your hearing and impair your awareness of your surrounding environment.
- Maintain a comfortable stopping distance from all other objects, riders, and vehicles. Safe braking distances are based on forces, such as weather and lighting conditions among other variables.

WET WEATHER



Take extra care while riding in wet conditions. The Super73 is not meant for use in puddles, heavy rain, and streams. Never immerse this product in water as the electrical system may be damaged. Take extra care while riding in wet conditions. Feet or hands can slip in wet conditions and lead to serious injury from a fall. Brake earlier as it will take longer to slow than when operating in dry conditions. Decrease riding speed. Wear reflective clothing and use approved safety lights. Road hazards are more difficult to see when wet, proceed with caution.

RIDING AT NIGHT



Be safe! It is recommended to not ride at night. Ensure your Super73 is equipped with a full set of correctly positioned and clean reflectors. Use a properly functioning lighting set comprised of a white front light and red rear light. Wear reflective and light-colored clothing. Slow down and use familiar roads with street lighting, if possible.

FOR PARENTS AND GUARDIANS



As a parent or guardian, you are responsible for the activities and safety of your child. The Super73 is not designed for use by children under the age of 16. Obey local regulations and always wear a helmet.

SAFETY

The following safety notes provide additional information on the safe operation of your Super73 and should be closely reviewed. Failure to review these notes can lead to serious injury or death.

- All users must read and understand this manual before first use. Additional manuals for components used on your bicycle may also be provided and should be read before use in addition to this manual.
- Always wear an approved bicycle helmet whenever using this product and ensure that all helmet manufacturer instructions are used for fit and care of your helmet. Failure to wear a helmet when riding may result in serious injury or death in the event of an accident.
- Ensure correct tightening and setup is performed on your bicycle after assembly.
- It is your responsibility to familiarize yourself with the laws and requirements of operation of this product in the area(s) where you ride.
- Ensure handle bar grips are not damaged and properly installed. Loose or damaged grips can cause you to lose control and fall.
- Off-road riding requires close attention and specific skills and presents variable conditions and hazards which accompany the conditions. Wear appropriate safety gear and do not ride alone in remote areas.
- Bicycles and bicycle parts have strength and integrity limitations and extreme riding should not be performed or you risk damaging the components or becoming seriously injured.
- After any incident you must consider your bike unsafe to ride until an inspection is made according to provided safety check in the is handbook. Consult with a professional cycle mechanic for a comprehensive inspection.
- Failure to properly charge, store, or use your battery will void the warranty and may cause a hazardous situation.
- Extreme care should be taken when using the pedal assist sensor and propulsion on this product. Ensure you understand and are prepared for the power assistance to engage as soon as pedaling is underway.
- You should check the operation of the brake inhibitor switches before each ride. The brake system is equipped with an inhibitor that shuts down the power to the electric motor whenever the brakes are engaged.
- User must understand the operation of the throttle and pedal-assist levels before using, and take ample care in their usage at speeds appropriate for each region and user experience level. Use the lowest assist level until you are comfortable with the bike and feel confident in controlling the power.
- Because e-bikes are heavier and faster than normal bicycles, they require extra caution and care while riding.
- Do not remove the front, rear or pedal reflectors.
- Be familiar with your local e-bike laws.
- Any after-market changes to your Super73 bike not expressly approved by Super73 may void the warranty and create an unsafe riding experience.

MAINTENANCE SCHEDULE



DANGER!

Intensive use of the Super73 may cause possible damage to the frame and the fork. It is important to inspect the frame and the fork and look for signs of cracks. A broken or cracked frame and fork can cause an accident and injury. Refer to the Intended Use section of this manual.

In order to prolong the life expectancy of your bike, here is an example of a maintenance schedule, under intended use, that we recommend the following:

I. BEFORE AND AFTER EACH RIDE

- Check the alignment of the wheels.
- Check the state of charge of the battery.
- Check that brakes function properly.
- Check tires for any punctures, and wheels for proper alignment.
- Store the bike carefully in a clean and dry place.
- Check that your kickstand is tightly secured.
- Check for loose cables or wires that may be strained when turning the front wheel from left to right.

2. EVERY MONTH

- Inspect the handlebar and steer tube for any unusual movement.
- Check the cables, tires, handles.
- Check the wear of brake rotors, brake pads (see section on brakes), and replace them if necessary.
- Check the tension of the spokes, and ensure that the wheels are true and properly dished.
- Lube the chain and check the tension in the chain. It should be tight enough that it only allows you to move it up and down about one inch. If it is sagging or much looser than that, you need to tighten the chain.

3. EVERY SIX MONTHS (depending on frequency and type of use)

- Inspect the frame, fork and look for signs of cracks in the metal.
- Check the bottom bracket and crankshaft and tighten the bolts on each crank.
- Check and grease the wheel hubs, headset, all parts in friction.



For your own safety, if any of the recommended maintenance procedures are not within your skill set, we advise taking your Super73 to an E-bike specialist or professional cycle mechanic for inspection.

WASHING AND CARING FOR YOUR BIKE



Dirt, salt, and other elements can damage your bike. Regularly clean your Super73 and protect it against corrosion. Use clear water for cleaning and a gentle soap if necessary to dissolve grease and other residues. Do not spray water directly onto your Super73. Instead, use a lightly damp cloth to wipe down any dirt or debris. After drying your bike, treat surfaces with a care product. Finally, wipe all parts with a clean, soft cloth.

Do not clean your Super73 with a strong water jet or steam jet from a short distance. The water can get passed the seals and get inside the bearings. Lubricants are then diluted, increasing friction. In the long run, the bearing surfaces will deteriorate.

MAINTENANCE & COMPONENTS



DANGER!

Before performing any work on your Super73 electronics system, turn off the system. Involuntary activation of the Super73 system poses a risk of injury.

TIRES / WHEELS

The Z/ZG has tire sizes of 20" x 4.25" rubber tires with inner tubes and a rim liner. The tube size for both the front and rear tires is 20" x 4.25" or 20" x 4". The tires are designed for durability and safety for regular cycling activities. However, tires must be checked before each use for proper inflation and condition.

Proper inflation, good maintenance, and quick replacement will help ensure that the operational characteristics of your bike will be maintained and dangerous conditions avoided.

Tires must be inflated using a pump with a Schrader valve tip with a recommended pressure between 18 and 25 psi (1.24 - 1.72 bar). Check the condition of the tires and rims for damage, cracks or deformation. The recommended tightening torque of the wheel nuts is 25ft/lb (34 N m).

It is essential that the proper air pressure is maintained in the tires all the time. Do not under-inflate or over-inflate your tires. Low pressure can cause loss of control and tires that are too inflated can burst. Failure to maintain proper air pressure rating indicated in the handbook may at any time result in tire and/or wheel failure.

Inflate your tires from a regulated air source with an available manometer. Inflating your tires with an unregulated air source could over-inflate them, resulting in an exploded tire. When tire wear becomes obvious or a hole in the tire is found, you must replace the tires and / or tubes before using the bike, otherwise injury to operators and / or damage to your bike could occur.



In addition to proper inflation, correct wheel alignment helps to decrease tire wear. If you find a tire is worn unevenly, have a professional cycle mechanic check the wheel alignment.

CHAIN TENSION

There should be approximately one half inch of movement in the chain up and down at a point halfway between the front and rear sprockets. To change the tension loosen one of the axle-nuts and move the wheel forward or backward to adjust and then tighten the bolts when proper tension is achieved.

HELMETS / REFLECTORS

A properly fitting ANSI or SNELL, (or CE if you are located in Europe), approved bicycle safety helmet should be worn at all times when riding your bicycle, or recommended per your local laws. Always wear a properly fitted helmet that covers the forehead when riding a bicycle. Many states require specific safety devices. It is your responsibility to familiarize yourself with the laws of the state where you ride and to comply with all applicable laws, including properly equipping yourself and your bike as the law requires.

Reflectors are important safety devices that are designed as an integral part of your bicycle. Federal regulations require every bicycle to be equipped with front, rear, wheel, and pedal reflectors. These reflectors are designed to pick up and reflect street-lights and car lights in a way that helps you to be seen and recognized as a moving bicyclist. Check reflectors and their mounting brackets regularly to make sure they are clean, straight, unbroken, and securely mounted.

BRAKES



Brakes are an integral part of the operation of your bike and must be properly maintained, adjusted, and replaced. If any of the below is not within your skill set we recommend taking your bike to an E-bike specialist or professional cycle mechanic



Mechanical brake lines require maintenance not only on the pads and rotors but also on the brake cables.

For optimum braking performance, Super73-ZI/ZG bikes are equipped with Tektro mechanical disc brakes. For brake adjustment instructions, visit the support section of our website at www.Super73.com or review Tektro brake adjustment manuals on www.tekro.com. For any manufacturing issues or questions regarding Tektro brakes, you can contact your local Tektro representative: www.tekro.com

The Super73 brake orientation is as follows:

Rear brake = right lever

front brake = left lever

- Brake Models: <https://www.tekro.com/products.php?p=25>
- Brake pads: <https://www.tekro.com/products.php?p=226>

The wear of the pads on a mechanical disc brake can be regulated by unscrewing the cable tension knob. There is a complementary adjustment of the inner pad which can be tightened closer or removed from the disc by screwing it in or out with a 5 mm Allen key.

To ensure maximum service life of the brake components, avoid contamination of the pads and the disc by greasy substances.



Regularly check the condition of your cables, ducts or harness and the wear of your pads. Some discs are only compatible with "resin" pads. Do not use a metal pad with discs marked "Resin".

For better ergonomics and safety, we advise you to adjust the brake levers in a position that places it as a natural extension of the user's arms. If you have any questions or concerns, please contact Super73.

NEW BRAKE PAD & ROTOR BED-IN PROCESS

Any time you replace your brake pads, rotors, or both, it is important they are properly bedded for optimal performance. To bed your brakes properly after replacement, accelerate your bike up to 20mph or 25 km/h and then engage your brakes to bring the bike to a near stop, and then repeat the process up to 8-10 times. This process allows your pads to wear evenly as well as remove surface glaze and contamination from installation.

REPLACING THE PADS

Check for wear by looking at your brake pads through the spaces between the wheel's spokes. The outside pad will be pressed against a metal rotor. Generally, there should be at least 1/4 inch of pad. If you see less than 1/4 inch (0.6 mm) of pad, you may want to have your brake pads inspected or replaced.

When pads are worn, make sure to adjust both clearances between the rotor and pad so that they are equal and balanced. If only one side is adjusted it will cause braking failure.



It is highly recommended that you wear rubber gloves when handling new brake pads, as direct contact with your hands can contaminate the pads and/or rotor during installation. Contaminated brake pads and rotors can negatively affect braking performance.

THE TEKTRON WARRANTY

Super73 brakes are from the Tektro brand. For any manufacturing problems or questions related to Tektro brakes, you can contact the local Tektro representative. The contact details of the distributors and places of services: <http://www.tektron.com/service-a.php?t=2>

BATTERY



The battery is the most important component of your Super73. Following a few simple rules, you can optimize its life:

- Do not store a discharged battery. It could go into deep discharge which will reduce its life.
- Make it a habit to recharge at the end of each ride, so your bike will always be ready to go again.
- Even if it can withstand storage temperatures of 23°F - 104°F (-10°C - 40°C), you can optimize its shelf life by storing it at room temperature 65°-75°F (18° - 23°C).
- Observe operating conditions between 40°F - 85°F (4°C - 30°C).
- Do not leave your battery exposed to high temperatures or direct sunlight for long periods of time (for example, on the back of a car in direct sunlight).
- Do not dispose of the battery in your trash. There are proper disposal methods for lithium-ion batteries. Please check your local waste management regulations.



Do not open the battery. There is a risk of short circuit. Opening the battery will void the warranty. Protect the battery against mechanical damage, heat (in case of prolonged exposure to sunlight), fire, and immersion in water. There is a risk of explosion. In case of damage and improper use of the battery, vapors may emanate. Keep children away from the battery.



Please follow proper charging instructions before charging the battery found on pg. 12. To charge the battery, use only the original charger or charger approved by the manufacturer. Remove the battery from the charger and disconnect the charger from the power supply when charging is complete.

RANGE

The maximum range of a full charge depends on many variables such as: age of battery, type of terrain and incline, rider weight, speed, outside temperature, driving style, amount of pedaling, or tire pressure.

Range in cold weather:

- In case of extreme cold, the range of your electric bike is reduced. It is a normal physical process, and in no case a damage or defect of the battery. If you use your battery when temperatures rise, it's energy will increase again.
- We advise you to store the battery and charge it at room temperature during cold days. The power consumption warms the battery and you benefit from a good battery life, even when it is cold outside.
- In winter, however, plan for shorter trips or pedal with a lower level of assistance.

Conditions that affect your battery's range:

- Temperature: Extreme cold and heat can affect the battery's capacity.
- Total Number of Charge Cycles: As the battery ages, total capacity can decrease. The battery has a total of 1,000 full cycles when it's new.
- Wind: Riding into a strong headwind can decrease range.
- Road Conditions: Excessively rough or hilly terrain requires the consumption of more power.
- Load: Carrying extra cargo on the bike or in a backpack will use more energy.
- Rider Weight please observe the max weight of 275 lbs (124.74 kg).
- Repeated acceleration from a standing start.
- Poor Maintenance: Under-inflated tires, mal-adjusted brakes, a dry or dirty chain, can decrease range.

Tips for Maximizing Range:

- Charge the battery at a comfortable temperature range between 65°F - 75°F (18.3°C - 23.9°C)
- Lithium-ion batteries have no chemical memory, and it is not necessary to discharge the battery completely for the best performance. Charging a partially full battery will have no negative effect.
- Maintain proper tire pressure and lube the chain regularly.
- Operating temperatures between 40°F - 85°F (4°C - 30°C) will significantly increase range.



DANGER!

Never charge the battery in a flammable environment. For safety reasons, the charger and the battery must be placed on a dry, non-flammable surface.

Never charge or use a defective battery. Never send a battery by postal mail by yourself! A battery is in the category of hazardous/dangerous goods and requires certification to send by mail. Doing so without proper certification is punishable by law.

Immediately remove the battery from the Super73 if you notice damage to the electrical system and visit your local E-bike Specialist for inspection or contact Super73 directly. Any lack of professional expertise may cause damage or serious injury.

SEAT

It is not possible to adjust the seat height of the Super73. It is fixed to the frame by bolts. For maintenance, use a cloth and water with a gentle soap for cleaning. Avoid leaving the seat too long in the sun, as the fabric can be damaged by the sun's UV rays. Avoid wearing clothes that may puncture or tear the seat.



The bike is subject to wear and tear, like all mechanical parts. Materials and parts react differently to wear and abrasion. If the intended life of a part is exceeded, it is possible that it will suddenly fail, which represents a certain danger for the rider. Any type of cracks, streaks, or color changes in highly stressed areas indicate the maximum wear of a part. It must, therefore, be replaced immediately. It is important to use genuine properly specified parts for safety-critical components during the replacement of worn parts.

WARRANTY USA / NORTH AMERICA

Subject to the terms, conditions and limitations herein, Super73, Inc. warrants to the original retail purchaser of the bike that the frame, fork, electronics and battery of the bike will be free from defects in material and workmanship under normal use and service for one (1) year from the date of delivery (the "Limited Warranty"). The Limited Warranty exists for abovementioned defects that were already present at the time of delivery of the bike and covers the battery, motor,

controller, display and sensors. Like any rechargeable battery, your Super73 rechargeable battery pack will experience a decrease in capacity over time as it is subjected to charge and discharge cycles. The battery warranty does not include damage from power surges, use of an improper charger, water damage, improper maintenance, or such other misuse or normal wear. This warranty is only valid for the first buyer. Any other remedy, such as compensation for damages of any kind or loss of use, is excluded. The warranty period cannot be extended by granting an additional warranty.

If the original retail purchaser notifies Super73, authorized dealer or the retail location from where the bike was purchased of a warranty claim within the applicable warranty period set forth above, Super73 will evaluate the warranty claim. The purchaser will be responsible for shipping the bike to the location notified by Super73. If Super73 determines that the defective part is covered by the Limited Warranty, Super73 will replace or repair the defective part, at Super73's sole discretion, without charge to the buyer and also reimburse the shipping cost incurred by the purchaser. If the defective part is not covered by the Limited Warranty, Super73 will repair or replace the defective part at the purchaser's cost and the purchaser will also be responsible for the shipping costs.

- (a) The original purchaser provides proof that the bike was purchased from Super73 or one of its authorized dealers or distributors.
- (b) The person seeking warranty coverage is the original and first owner of the bike (warranty is not transferable in the case of a re-sale).
- (c) The bike was used in accordance with its intended purpose. The Super73 bike is intended for use on paved road.
- (d) The electronics including connectors and cables have not been repaired or modified.

For more information on our Warranty, Shipping Damage Claims, our Return and Cancellation Policy, please visit super73.com for service in North America.

WARRANTY EUROPE

Super73 B.V. warrants to the original owner of each of its Super73 motorbike, when purchased directly from Super73 B.V., or an authorised retailer, that the Product is complete and that the functional parts will be free of defects for the periods and under the terms indicated below.

Warranty

1. A twenty-four (24) month or 500 life cycles, whichever comes first, for the Super73 battery from the date of purchase by the original owner. Like any rechargeable battery, your Super73 rechargeable battery pack will experience a decrease in capacity over time as it is subjected to charge and discharge cycles. Super73 warrants that your battery pack will maintain 70% or higher capacity for at least 500 charge cycles or two years, whichever comes first. The battery warranty does not include damage from power surges, use of an improper charger, water damage, improper maintenance, or such other misuse or normal wear.

2. A twenty- four (24) month, from date of delivery to the original owner for all other parts, excluding wear and tear on tires, tubes, rims, spokes, brake pads, cables, chain, wheels, grips, and saddle.

Terms and Conditions of Warranty

1. The Warranty is made to the original owner only and is non-transferrable. It is only effective with a valid proof of purchase consisting of the original purchase document or receipt indicating the date of purchase, the serial number, the dealer's name (if applicable) and the designation of the model. Super73 reserves the right to reject the coverage of this Warranty if the accompanying documentation of the Super73 components is not accurate or complete.
2. The Warranty becomes effective from the date of original purchase and expires at the end of the applicable warranty period.
3. This Warranty is void if the care instructions in the owner's manual (whether provided with the sale or posted on the Super73 website), and any amendments thereto, are not followed.
4. This Warranty does not apply to rental or commercial use of the Product.
5. This Warranty exclusively covers systems and components provided by Super73.
6. The use of spare parts from unknown sources, for example, replacement parts from third parties is strictly prohibited.
7. Photo and /or video will be required for warranty inspection by a Super73 Customer care agent.
8. If you purchased a bike and had it then shipped to another country or outlying island territories (ex: DOM-TOM, Netherlands Antilles), parts will only be sent to the country and mainland European territory in which the bike was originally sent.
9. This Warranty only covers defective materials and manufacturing defects. In the case of a warranty claim, Super73 undertakes to either repair faulty system components and/or to replace such components, at the discretion of Super73.

Upon identifying a fault with a Super73 bike, the owner must contact the Company or a local authorized Super73 dealer to initiate the warranty process. Any component to be repaired under this Warranty must be transported to the dealer at the owner's own expense and risk, and, after the completion of such repair, must be picked up at the dealer. Costs for repair work performed in advance by persons who have not been authorized by Super73 will not be reimbursed. In such a case, any warranty claim will cease and any remaining warranty period will be voided. Repair work and/ or replacement of components during the warranty period does not lead to an extension and/or a new start of the warranty period. Repair work and direct replacement during the warranty period may be performed with

functionally equivalent replacement components. This Warranty excludes any claims as to the reimbursement of property damages, downtimes, travel expenses, lost profit, or any other claims. Super73 maximum liability in connection with this Warranty is limited to the purchase price of the Product.

Exclusions – Items not covered under Warranty

1. External influences, mainly falling rocks, collision, accident, and other external events with an immediate external effect due to mechanical powers.
2. Purposeful and/or malevolent acts, theft, and robbery as well as natural hazard events and/or acts of mischief. Inappropriate use, e.g., the Product was exposed to liquids, chemicals of any type and/or extreme temperatures, wetness and humidity and/or if the battery suffers damages due to non-compliance with the special instructions outlined in the chapter “Handling and Charging of the Battery.” Inappropriate use includes the use of the Product for stunts, jumps and/or riding with more than one person.
3. Overcharging the battery or not adhering to the Battery Care Instructions (whether provided with the sale or posted on the Super73 website), and any amendments thereto.
4. In the case of test, maintenance, repair, and replacement work due to normal use.
5. If the model, serial or product number on Super73 product has been changed, deleted, blurred, or removed. The seal and/or the serial number decal on the battery housing has been broken or obviously manipulated.
6. In the case of use of the battery in systems that are not approved for such use with this particular Product.
7. In the case of the operation of the Super73 system with batteries other than the batteries designed for the Super73 system (refer to owner’s manual).
8. If one or more than one Super73 part has been opened, altered or repainted.
9. If Super73 concludes that there has been a case of modification or tampering with firmware.
10. If the Product is sold, gifted, or rented.

LABOR COST OF REPAIRS: Under Warranty, we will repair or replace defective components and parts only. This Warranty does not cover the required labor cost of repairs from non-authorized parties and Super73 reserves the right to withhold coverage of labor costs at its sole discretion.

For more information on our Warranty, Shipping Damage Claims, our Return and Cancellation Policy, please visit eu.super73.com for service in Europe.