

CERTIFICATE

Issued to:
Applicant:
Foshan Ojun Electronic Technology Co., Ltd.
No. 7, Nanbian Road, Changjiao,
Xingtang, Shunde, 528325 Foshan Guangdong,
China

Manufacturer/Licensee:
Foshan Ojun Electronic Technology Co., Ltd.
No. 7, Nanbian Road, Changjiao,
Xingtang, Shunde, 528325 Foshan Guangdong,
China

Product(s) : flexible cord switches
Trade name(s) : OJUN
Type(s)/model(s) : 8s.303

The product and any acceptable variation thereto is specified in the Annex to this certificate and the documents therein referred to.

DEKRA hereby declares that the above-mentioned product has been certified on the basis of:

- a type test according to the standard EN 61058-1:2002 + A2: 2008, EN 61058-2-1:2011
- an inspection of the production location according to CENELEC Operational Document CIG 021
- a certification agreement with the number 2100620

DEKRA hereby grants the right to use the ENEC KEMA-KEUR certification mark.

The ENEC KEMA-KEUR certification mark may be applied to the product as specified in this certificate for the duration of the ENEC KEMA-KEUR certification agreement and under the conditions of the ENEC KEMA-KEUR certification agreement.

This certificate is issued on 22 December 2016 and expires upon withdrawal of one of the above mentioned standards.

Certificate number: 2197112.13

DEKRA Certification B.V.



drs. G.J. Zoetbrood
Managing Director



H.L. Schendstok
Certification Manager

© Integral publication of this certificate is allowed

ACCREDITED BY THE
DUTCH ACCREDITATION
COUNCIL



SPECIFICATION OF THE CERTIFIED PRODUCT**Product data**

product	: flexible cord switches
trade name	: OJUN
type	: 8s.303
type reference	: common type (C.T.)
method of actuating	: push-button
rated current	: 2 A resistive, 2 A tungsten filament lamp load
rated voltage	: 250 V~
pattern no.	: 1
circuit to be controlled	: resistive and tungsten filament lamp
temperature limit	: T55
contact opening	: full disconnection
frequency of operation	: 10.000 operating cycles
class	: for class II appliances
degree of protection	: IP20
degree of pollution	: 2
insulating material	: tracking resistant 175 V
category to heat and fire	: 650°C
rated impulse withstand voltage	: 2500 V
material group	: IIIa
design	: non-rewirable
termination	: soldered connections
applied flexible cord	: H03VVH2-F 2x0,5 and 2x,75 mm ² H03VV-F 3G0,75 mm ²
certification mark	: complies with the requirements
description	: body and actuating member of thermoplastic material
markings	: printed on the body

TESTS**Test requirements**

EN 61058-1:2002 + A2:2008
EN 61058-2-1:2011

Test result

The test results are laid down in DEKRA test file 2197112.13.

Remarks

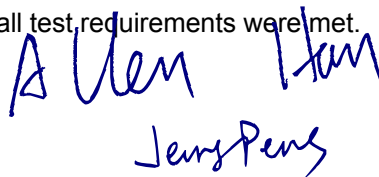
This certificate replaces our certificate 2163323.01 dated 2013-06-14 and is also based on the results of that certificate.

Conclusion

The examination proved that all test requirements were met.

Tested by : A. Han

Checked by : J. Peng

**Factory locations**

Foshan Ojun Electronic Technology Co., Ltd.
No. 7, Nanbian Road, Changjiao, Xingtan, Shunde, 528325 Foshan Guangdong, China