



INSTALLATION MANUAL

Overview

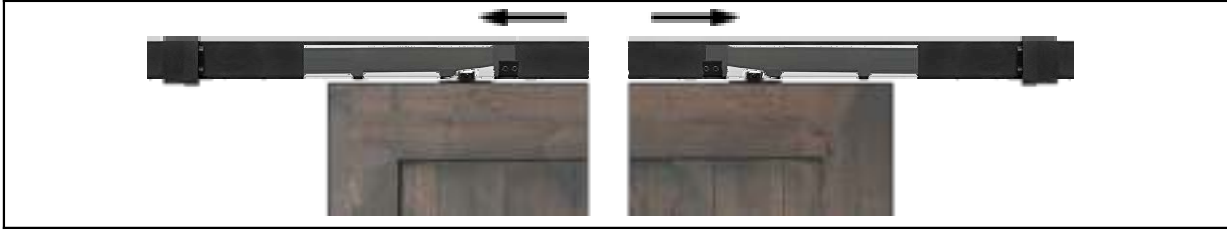

Install the Soft Close Mechanism

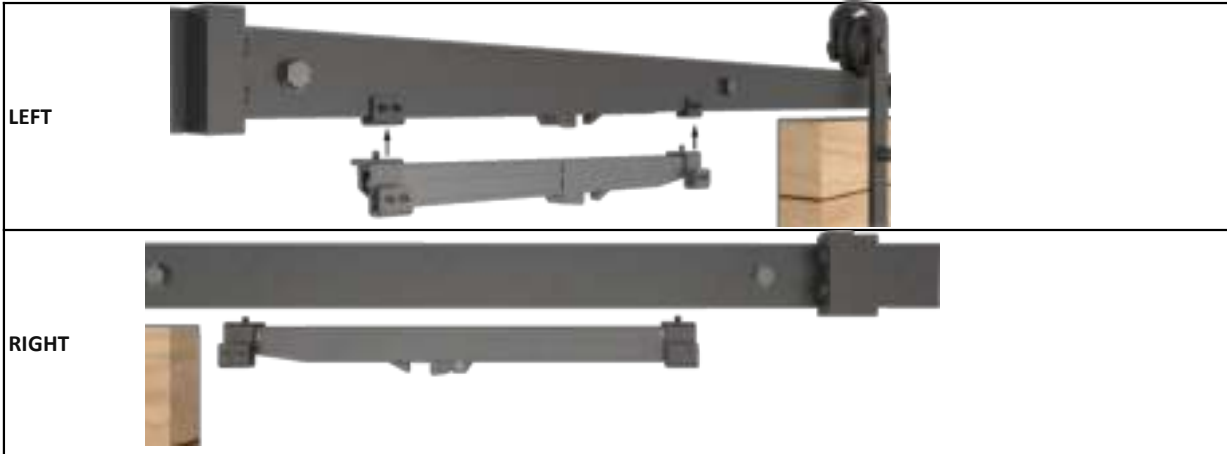

Connect the two S-Shape hooks to both end sides of the soft close with the supplied screws.

Simply attach the soft close to the back of the track with the hooks and fasten it with hex wrench.

Attention: There is no need to drill small holes on the rail.

Install the Actuator



To determine where to install the actuator on the door, firstly you may push the door to the final stop position.

Then place the actuator into the gap of the soft close, and fix the actuator there with the supplied screws.

Repeat the above steps on the other side while installing the second soft close set.

Package Includes

