



295-305 Wp 60 MONOCRYSTALLINE CELLS

AEG solar modules combine the most advanced technology with high reliability in manufacture to offer you a product meant for high achievements.



BUILT TO LAST: 20-YEAR PRODUCT WARRANTY



HIGH EFFICIENCY WITH PERC TECHNOLOGY

The AEG solar module AS-M602U Ultra Black features PERC coating, which allows you to gain extra efficiency and boost the performances of your solar plant.



ULTRA BLACK, ULTRA PREMIUM

The premium selection of components grants the AEG AS-M602U Ultra Black a ‚total look‘ with superior aesthetics and product quality.

COMPREHENSIVELY CERTIFIED

AEG solar modules and production facilities are compliant with the the latest standards to guarantee safety and reliability. Production facilities are certified according to ISO 9001, ISO 14001 and OHSAS 18001. AEG solar products are certified among others by:



YOUR ADVANTAGE AT A GLANCE

Premium solar panel with quality components
High efficiency - up to 305 Wp
Product compliant with IEC 61215, IEC 61730
20 years Product warranty
25 years linear Power warranty

www.aeg-industrialsolar.de



PHOTOVOLTAIC MODULE AS-M602U

ELECTRICAL CHARACTERISTICS AT STC¹

		AS-M602U-295	AS-M602U-300	AS-M602U-305
Nominal Power (P _{max})	[Wp]	295	300	305
Tolerance on Nominal Power P _{max} ²	[Wp]	-0 / +5	-0 / +5	-0 / +5
Maximum Power Voltage (V _{mp})	[V]	32.68	32.86	33.04
Maximum Power Current (I _{mp})	[A]	9.04	9.14	9.24
Open Circuit Voltage (V _{oc})	[V]	40.42	40.58	40.74
Short Circuit Current (I _{sc})	[A]	9.44	9.54	9.64
Module Efficiency (η _m)		17.68%	17.98%	18.28%
Maximum System Voltage	[V]	1000	1000	1000
Series Fuse Maximum Rating	[A]	20	20	20

MECHANICAL CHARACTERISTICS

Solar cells	60 (6 x 10) monocrystalline silicon, 158.75 x 158.75 mm (G1) cells
Front glass	3.2 mm (0.13") high-transparency AR coating glass
Backsheet	Black backsheet
Encapsulant	EVA (Ethylene-Vinyl Acetate)
Frame	Anodized aluminum alloy, black
Junction box	IP67 rated, 3 bypass diodes
Cables	UV resistant cable 1000 mm (39.3"), sec.4.0 mm ²
Connectors	MC4 compatible connectors
Dimensions	1665 mm x 1002 mm x 35 mm (65.5" x 39.4" x 1.37")
Weight	18.6 kg (41 lbs)
Maximum load	Wind: 2400 Pa / Snow: 5400 Pa


TEMPERATURE CHARACTERISTICS

NOCT	42°C ± 3°C
P _{max} Temp. Coefficient (γ)	-0.365 %/°C
V _{oc} Temp. Coefficient (β)	-0.270 %/°C
I _{sc} Temp. Coefficient (α)	0.038 %/°C
Operating temperature	-40°C to + 85°C

PACKING CONFIGURATION

Packing configuration	31 pcs / pallet
Loading capacity	868 pcs / 40 ft HC

TECHNICAL DRAWINGS

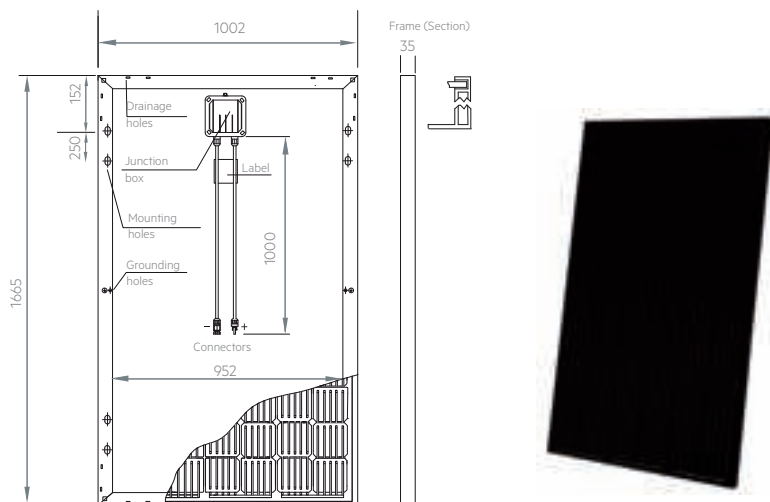


WARRANTIES

Product warranty	20 years
Performance warranty	25 years, linear ²

I-V CURVES / IRRADIANCES

Module: 300 Wp

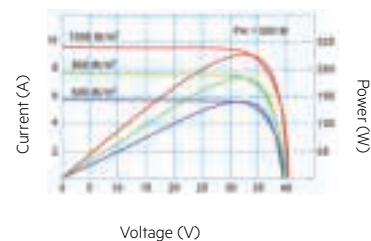

Module dimensions in the technical picture are expressed in mm with tolerance +2 mm (+0.079")

1 - Standard Test Conditions (STC): Irradiance 1000 W/m², Air Mass AM = 1.5, Cell Temperature 25°C, Power measurement uncertainty within ± 3%.

2 - AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power at STC within a power tolerance range between -0 Wp and +5 Wp.

3 - Normal Operating Cell Temperature (NOCT): Irradiance 800 W/m², Wind Speed 1m/s, Ambient Temperature 20°C, Power measurement uncertainty within ± 3%.

4 - No less than 97% of the minimum "Peak Power at STC" in the first year, power output decline no more than 0.7% per year thereafter. Full text of the Warranty Terms available at: www.aeg-industrialsolar.de

© Solar Solutions GmbH. Specifications in this datasheet are subject to change without notice. Code: AS-M602B-P-M6N1-SBB 295-305 version 202001V2. EN-VDH1

AEG is a registered trademark used under license from AB Electrolux (publ).

CONTACT US



Distributor of AEG photovoltaic products in Benelux:
VDH Solar Groothandel B.V.

Frankrijklaan 9 | 2391 PX Hazerswoude-Dorp, Holland | +31 (0)172 235 990 |
info@vdh-solar.nl | www.vdh-solar.nl / www.aeg-industrialsolar.de