


Midi

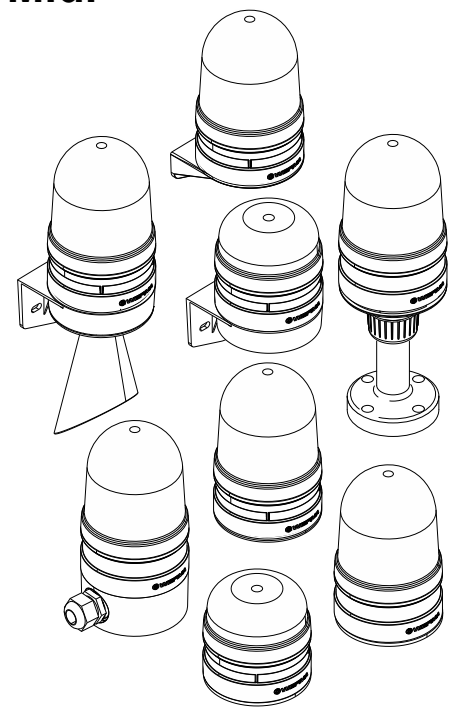

DANGER

⚠️ ⚡ ⚠️

ⓓ Anschluss **ausschließlich** durch ausgebildete Elektro-Fachkräfte.

ⓖ Electrical connection is to be made by trained electrical specialists **only**.

ⓕ Le branchement doit **uniquement** être effectué par des professionnels.

Ⓛ Il collegamento deve essere eseguito **solo** da elettricisti specializzati.

ⓔ La conexión **sólo** debe ser realizada por electricistas debidamente formados.

Ⓟ A ligação deve ser feita **exclusivamente** por profissional elétrico especializado.

Ⓝ De aansluiting mag **enkel** gebeuren door erkende vakmensen.

Ⓒ Připojení smí **provádět** pouze kvalifikovaný personál.

Ⓟ Podłączenie **wyłącznie** przez specjalistów-elektryków.

ⓕ Liittäminen kuuluu **ainoastaan** koulutettujen sähköalan ammattilaisten tehtäviin.

Ⓡ Подключение проводится только специалистом-электриком.

Ⓡ Bağlantı **sadece** eğitimli elektrik teknisyenleri tarafından yapılmalıdır.

Ⓒ 布线需由专业电工执行

⚠️ ⚡ ⚠️

⚠️ max. 110 db

⚠️ IP 66

161 / 461

⚠️ IP 66

DANGER EVS TwinFLASH

ⓓ Bei Epilepsie ungeeignet!

ⓖ Unsuitable for epilepsy sufferers.

ⓕ Ne convient pas aux personnes souffrant d'épilepsie.

Ⓛ Inadatto per epilettici.

ⓔ Inadecuado para epilépticos.

Ⓟ Não aconselhamos a pessoas que sofrem de Epilepsia.

Ⓝ Niet geschikt voor epileptici.

Ⓒ Nevhodné pro epileptiky.


Ⓟ Nie stosować przy zchorzeniu padaczki.

ⓕ Ei sovellu epileptikoille.

Ⓡ Не подходит для страдающих эпилепсией.

Ⓡ Epilepsi hastalığı olanların kullanmaması önerilir.








Ⓒ 不适用于癫痫病患者

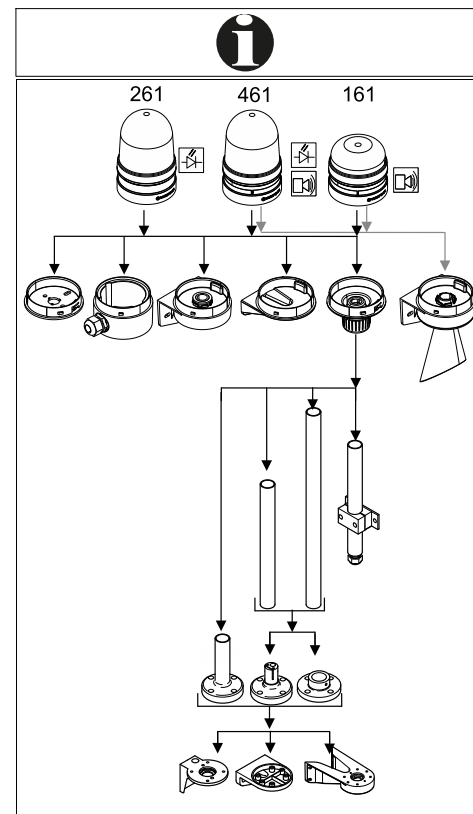


TwinLIGHT	261 x10 70	12V/24V ≈	<175 mA
	261 x10 60	115V/60Hz - 230V/50Hz	< 65 mA
TwinFLASH	261 x20 70	12V/24V ≈	<150 mA
	261 x20 60	115V/60Hz - 230V/50Hz	<100 mA
TriColour	261 430 70	12V/24V ≈	<135 mA
	261 430 60	115V/60Hz - 230V/50Hz	< 50 mA
LED Rotating	261 x40 70	12V/24V ≈	<120 mA
	261 x40 60	115V/60Hz - 230V/50Hz	<100 mA
TwinLIGHT	461 x10 70	12V/24V ≈	<290 mA
	461 x10 60	115V/60Hz - 230V/50Hz	<150 mA
TwinFLASH	461 x20 70	12V/24V ≈	<290 mA
	461 x20 60	115V/60Hz - 230V/50Hz	<205 mA
	161 700 70	12V/24V ≈	<135 mA
	161 700 60	115V/60Hz - 230V/50Hz	<105 mA







1

1a - 261 700 01
1b - 261 700 02
1c - 261 700 06
1d - 261 700 07
1e - 261 700 03
1f - 261 700 05

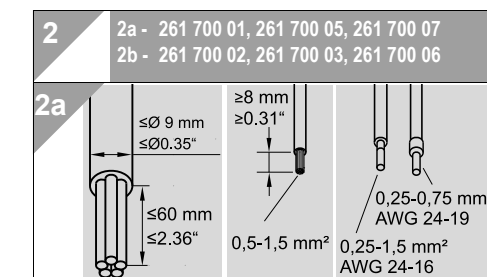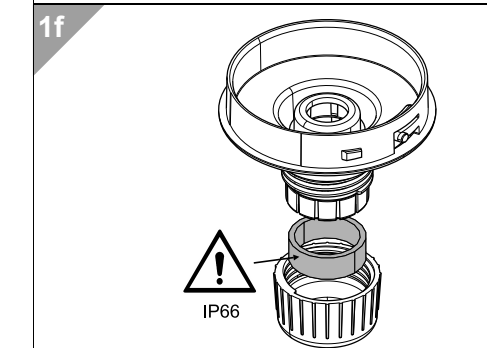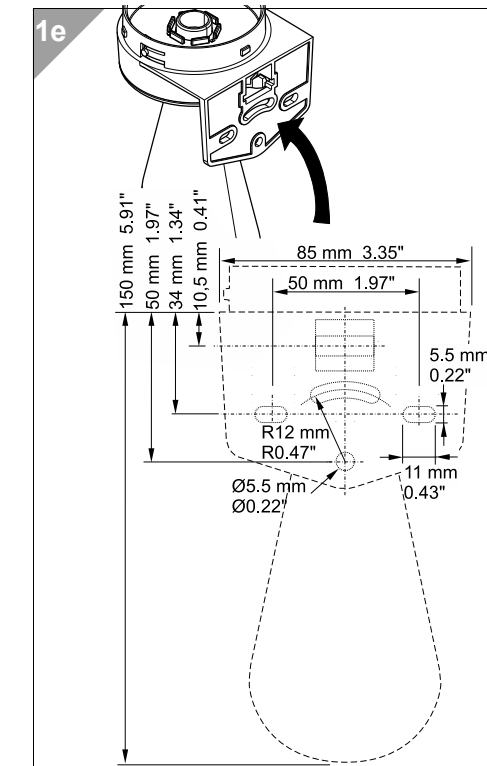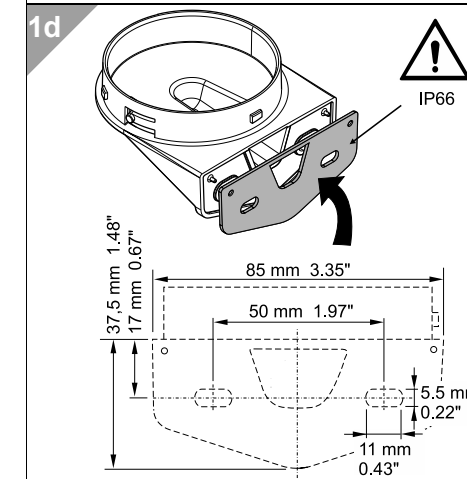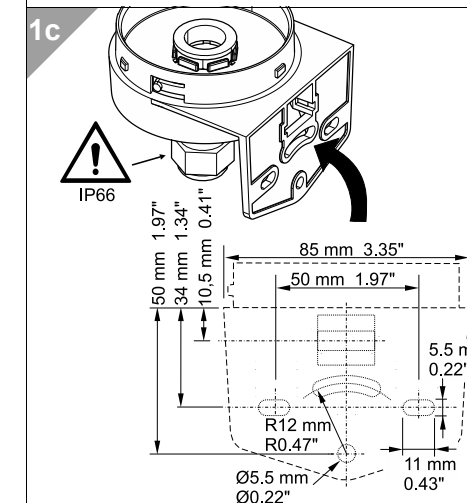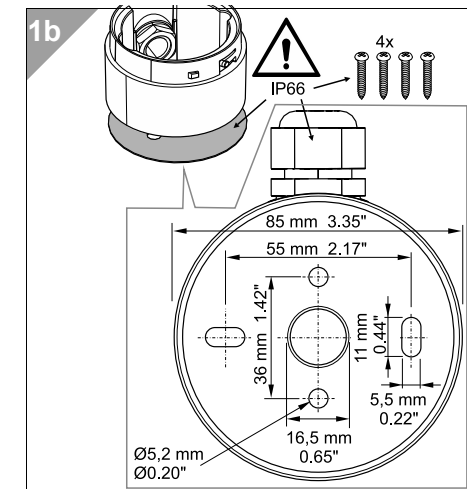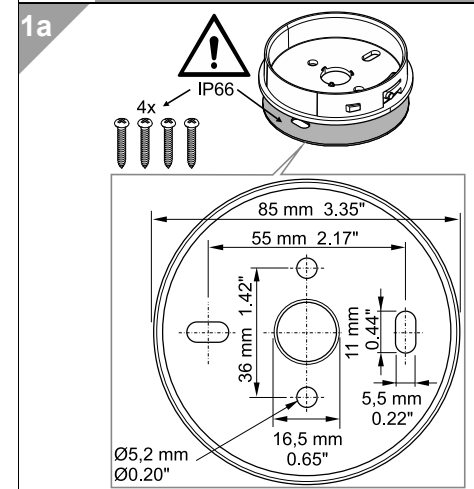

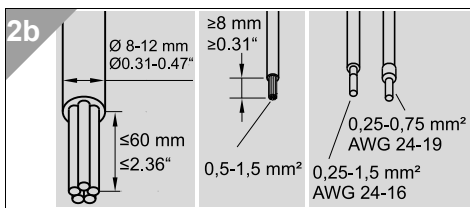

- 3**
- 3a - 261 700 01
 - 3b - 261 700 02
 - 3c - 261 700 06
 - 3d - 261 700 07
 - 3e - 261 700 03
 - 3f - 261 700 05

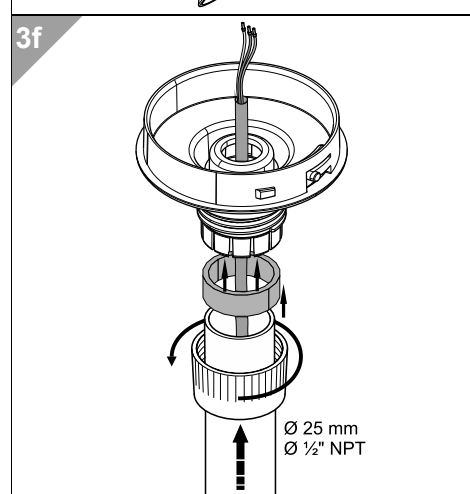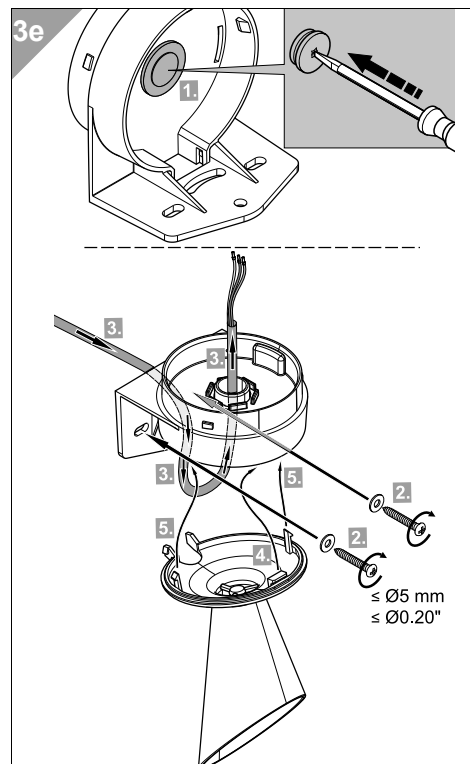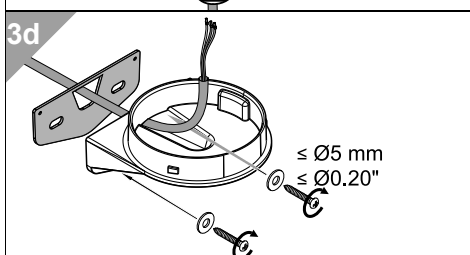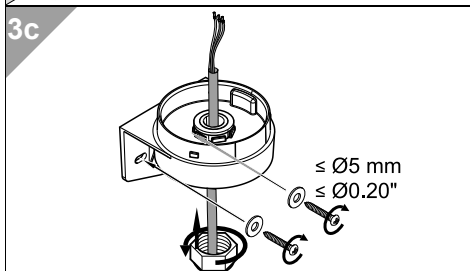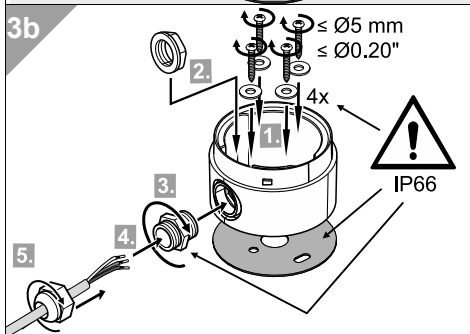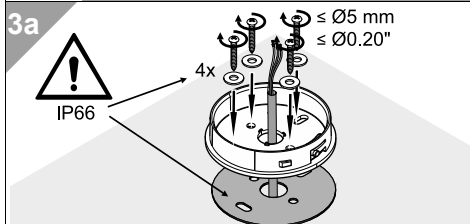

DANGER

4

push in clamps

4a TwinLIGHT

LED	X2	X1	X0 (COM)	Function
		•	•	flashing
	•		•	EVS

TONE	X3	X4	X0 (COM)	Function
			•	permanent
			•	blinking

4b TwinFLASH

LED	X2	X1	X0 (COM)	Function
		•	•	flashing
	•		•	EVS

TONE	X3	X4	X0 (COM)	Function
			•	
	•		•	

4c

TONE	X3	X4	X0 (COM)	Function
			•	
	•		•	

4d TriColour

LED	X2	X1	X0 (COM)	Function
		•	•	GN
	•		•	RD
		•	•	YE


4e LED Rotating

LED	X2	X1	X0 (COM)	Function
		•	•	rotating

5

NOTICE
dB = dB A (SPL) 1m

Tone	[dB]	[dB]
0 110 Hz	107	99
1 3.3 kHz	106	101
2 3.3 kHz	110	101
3 3.3 kHz	110	101
4 970 Hz / 800 Hz	95	94
5 2.85 kHz / 2.40 kHz	99	92
6 1200 Hz / 500 Hz	101	93
7 1200 Hz / 800 Hz	100	92
8 4.1 kHz / 2.1 kHz	110	101
9 700 Hz	97	92

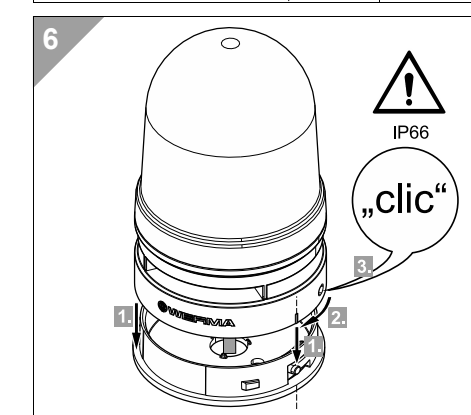

15000000129_AC
310.261.002

