





| REV. | REVISED DESCRIPTION | DATE | CHECKED |
|------|---------------------|------------|---------|
| A0 | FIRST RELEASE | 2019/03/11 | |

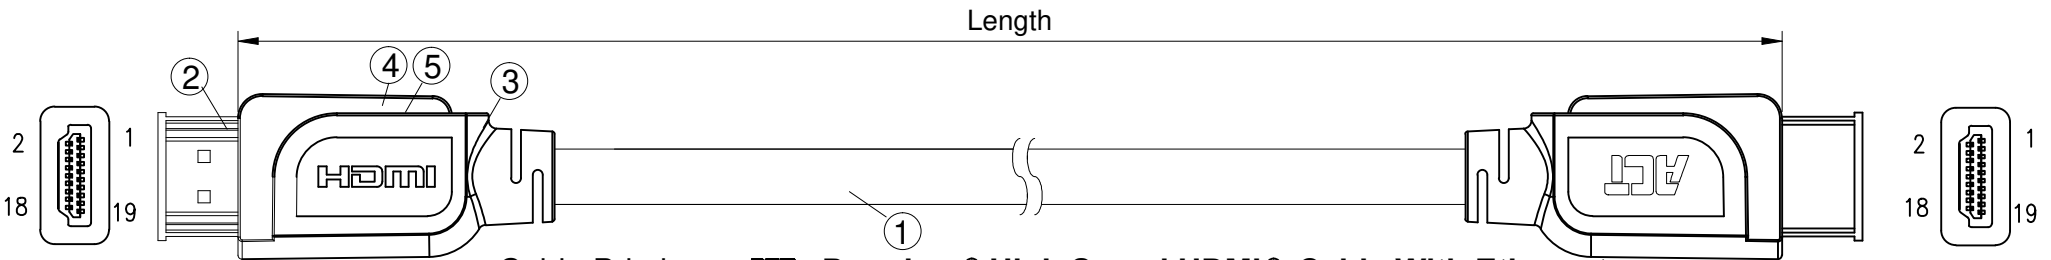

Cable Printing: **ACT Premium® High Speed HDMI® Cable With Ethernet**

HDMI A Male with Shielding Shell(Tinplate)

Signal Assignment

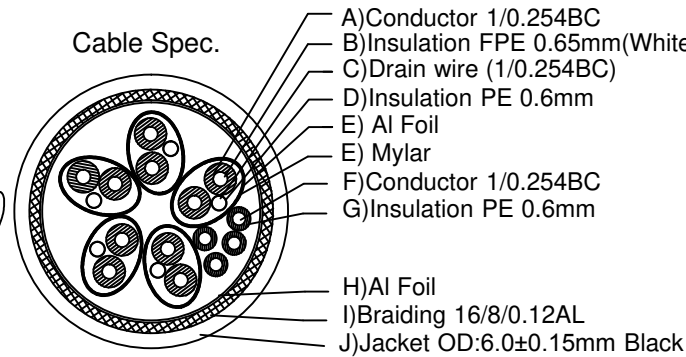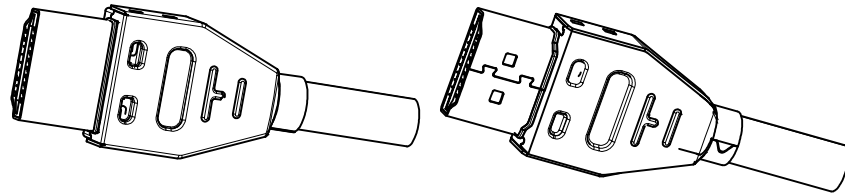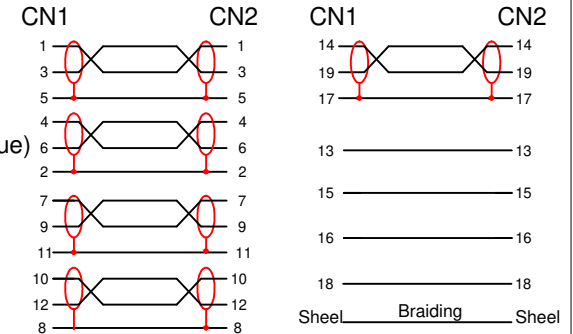


| Item NO. | Length(m) |
|----------|-----------|
| AK3941 | 0.5m |
| AK3942 | 1.0m |
| AK3943 | 1.5m |
| AK3944 | 2.0m |
| AK3945 | 3.0m |

Remark:

- 1.100% Open/Short Test
- 2.Conductive Resistance:5ohms MAX
- 3.Insulation Resistance:10M ohm MIN.
- 4.HI-POT:DC 300V/10MS.
- 5.The product is Reach/RoHS 2.0 compliant.
- 6.Support 4K*2K@60Hz ARC.
- 7.Support Bandwidth 18Gbs and low EMI to minimize interference from wireless signals.

| ⑥ | | HDMI Protective Cap, PE | 2PCS | |
|------|-------------------------------|--|-------|--------|
| ⑤ | External Mold | Outer Mould 45P PVC, Black | 2PCS | |
| ④ | Shielding Shell | Shielding Shell,tinplate | 2SETs | |
| ③ | Copper Foil | Copper Foil | 2PCS | |
| ② | Connector | HDMI A PLUG, Gold-Plated | 2PCS | |
| ① | Cable | 30AWG Premium HDMI (19+1BC) 128/0.12AL HDMI Cable OD:6.0mm [(1/0.254BC+FPE)*1P+D+AL+Mylar] *5C + (1/0.254BC+HDPE)*4C + AL + 128/0.12BC + PVCOD6.0mm | | |
| ITEM | DESCRIPTIONS & SPECIFICATIONS | | QTY | REMARK |



| | | | | | |
|---------------|--|-------------------------|-------|-----------------|------------|
| ACT | | ERP NO.: | | SAMPLE DWG NO.: | |
| | | DOC No.: | | REVISION | A0 |
| CUSTOMER: | | | UNIT | mm | |
| CUSTOMER P/N: | | | SCALE | NO | |
| DESCRIPTION | | Premium HDMI 30AWG 19+1 | | PAGE NO | 1/1 |
| | | | | DATE | 2019/03/11 |
| APPROVAL | | CHECKED | | DRAWN | |