

Operation method

Usage:

1. Plug the receiver into the microphone input port of the speaker or amplifier
2. Turn on the receiver power switch.
3. Turn on the handheld microphone (install two AA batteries)

Matters needing attention:

1. Do not place the product in water or fire.
2. Do not use it in places with signal interference, such as hospitals and airports.
3. Please do not disassemble the product without authorization, otherwise the warranty qualification will be lost.
4. If the product is faulty, please contact the dealer

Warranty description:

The warranty period and "three guarantees" period of validity of the product from the date of sale, failure of the product during normal use can be based on the "three guarantees"

Provision for repair, replacement and return. During the warranty period, you can enjoy free maintenance service in the technical service center of each dealer according to the content of this warranty clause. In the warranty (including the "three guarantees" period of validity) the following conditions will be implemented

Paid maintenance service, while not enjoying the three guarantees service:

1. The original valid warranty card and valid invoice are not allowed
2. Items such as the date of purchase, name of sales unit (valid with seal) or warranty card are not completely filled in.
3. Failure or damage caused by force majeure.
4. Failure and damage caused in transportation and loading and unloading.
5. Failure caused by failure to operate according to the usage method and precautions written in the manual.
6. Failure caused by disassembly, maintenance or modification of the product without authorization of the company.


Portable universal wireless microphone

Operating instruction

The user instructions


Dear users, thank you for buying our products!
Please read this manual carefully before using the product, and operate the product correctly according to the instructions. Please keep this manual properly for future reference.

Handheld transmitter function

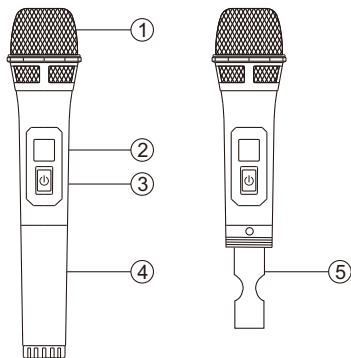

- 1.Net head: speak and sing to this place.
- 2.Status screen: display working status and frequency, etc.
- 3.Power switch: Turn on and off power.
- 4.Battery cover: Unscrew the tail tube to insert two AA batteries.
- 5.Tail cover: At the radio wave transmitting antenna, try not to carry it by hand when using it.

Receiver function

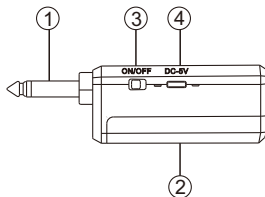

1. Audio output:
USB interface
- 2.AA battery installation
box
- 3.Switching power
supply
- 4.Charging port

PRODUCT SYSTEM PARAMETERS

Frequency range	2401-2483MHz
Frequency stability	10PPM (-10~50°C)
RF Power	25mW
Harmonic suppression	>65dB
Modulation method	FM
Maximum modulation	75K
Operating voltage	1.5VAA
Working current	100mA

Frequency range	2401-2483MHz
Frequency stability	10PPM (-10~50°C)
Sensitivity	-100dbm
Signal-to-noise ratio	S/N>105dB
Frequency response	50-15KHZ + 2dB
Operating voltage	3.7V14500