



Card Readers


RDF8

Unleash the full potential of your high-speed memory cards with Transcend's RDF8 card reader. By supporting SDXC/SDHC UHS-I, microSDXC/SDHC UHS-I and CompactFlash memory cards, Transcend's RDF8 card reader combined with the performance boost of advanced USB 3.1 Gen 1 technology is the professional's choice for fast and efficient data transfer.



A card reader for all the popular card types

Fully supporting the mainstream SD, microSD and CompactFlash memory cards, the RDF8 card reader can handle virtually any data transfer. You can even plug in three cards at the same time, effortlessly transferring music, videos, images, and other digital files with one compact card reader!

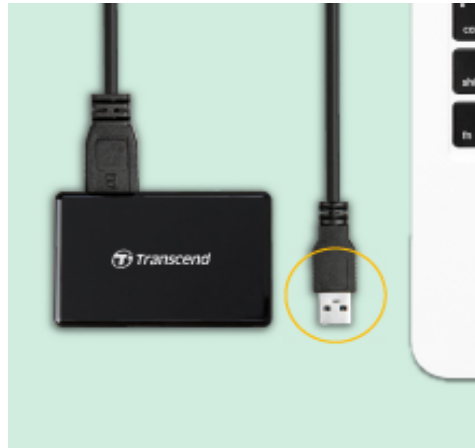

USB Type-A for great device compatibility

The RDF8 card reader is equipped with a micro USB (USB 3.1 Gen 1) port and includes a micro USB to USB Type-A cable to transfer data between your SD, microSD or CompactFlash memory card and your computer.



Blazing-fast transfer speeds

Taking full advantage of the USB 3.1 Gen 1 interface for fast transfers, Transcend's RDF8 card reader will unleash the full potential of your high-speed flash cards. In addition, the RDF8 has an LED indicator to show card insertion and data transfer activity.



Card Readers RDF8

Features

- USB 3.1 Gen 1 interface
- Supports SD, microSD, and CompactFlash cards
- Compact and portable design
- Convenient LED indicator



RecoveRx

RecoveRx is a data recovery software for memory cards, USB flash drives, external hard drives and SSDs.

Specifications

Appearance

| | |
|------------|---|
| Dimensions | 67.6 mm x 45 mm x 15.2 mm (2.66" x 1.77" x 0.60") |
| Weight | 32 g (1.13 oz) |
| Color | Black / White |

Interface

| | |
|----------------------|-------------------------|
| USB Type | micro USB to USB Type A |
| Connection Interface | USB 3.1 Gen 1 |

Hardware

| | |
|---------------------|-----------------------------|
| Card Reader Slot(s) | SD / microSD / CompactFlash |
|---------------------|-----------------------------|

Operating Environment

| | |
|-----------------------|---------------------------|
| Operating Temperature | 0°C (32°F) ~ 70°C (158°F) |
| Operating Voltage | 5V |

Performance

| | |
|------|---|
| Note | Speed may vary due to host hardware, software, usage, and storage capacity. |
|------|---|

Warranty

| | |
|-------------|----------------------------------|
| Certificate | CE / FCC / BSMI / KC / RCM / EAC |
| Warranty | Two-year Limited Warranty |

System Requirement

| | |
|------------------|--|
| Operating System | Microsoft Windows 7 Microsoft Windows 8 Microsoft Windows 10 Mac OS X 10.2.8 or later Linux Kernel 2.6.30 or later |
|------------------|--|

Compatibility

| | |
|-----------------------|--|
| Memory Card Supported | SDHC (UHS-I) / SDXC (UHS-I) / microSDHC (UHS-I) / microSDXC (UHS-I) / CompactFlash (UDMA7) |
|-----------------------|--|

Ordering Information

| | |
|-----|------------------------|
| OMB | TS-RDF8K2 TS-RDF8W2 |
|-----|------------------------|

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment.