

Balanced 4.4mm
Single-Ended 3.5mm

Formats:

DSD DSD512/256/128/64,
Octa/Quad/Double/Single-Speed
DXD 768/705.6/384/352.8kHz,
Double/Single-Speed DXD
PCM 768/705.6/384/352.8/192/176.4/
96/88.2/48/44.1kHz
MQA Decoder
Bluetooth Up to 96kHz
DAC: Bit-Perfect DSD & DXD DAC by Burr Brown

Line Section

Outputs:

Balanced: 6.7V max. (variable)
UnBAL: 3.5V max. (variable)

Output Impedance:


Balanced: $\leq 200\Omega$
UnBAL: $\leq 100\Omega$

SNR:

Balanced: $< 110\text{dB(A)} @ 0\text{dBFS}$
UnBAL: $< 110\text{dB(A)} @ 0\text{dBFS}$

THD+N:

Balanced: $< 0.007\% @ 0\text{dBFS}$
UnBAL: $< 0.015\% @ 0\text{dBFS}$

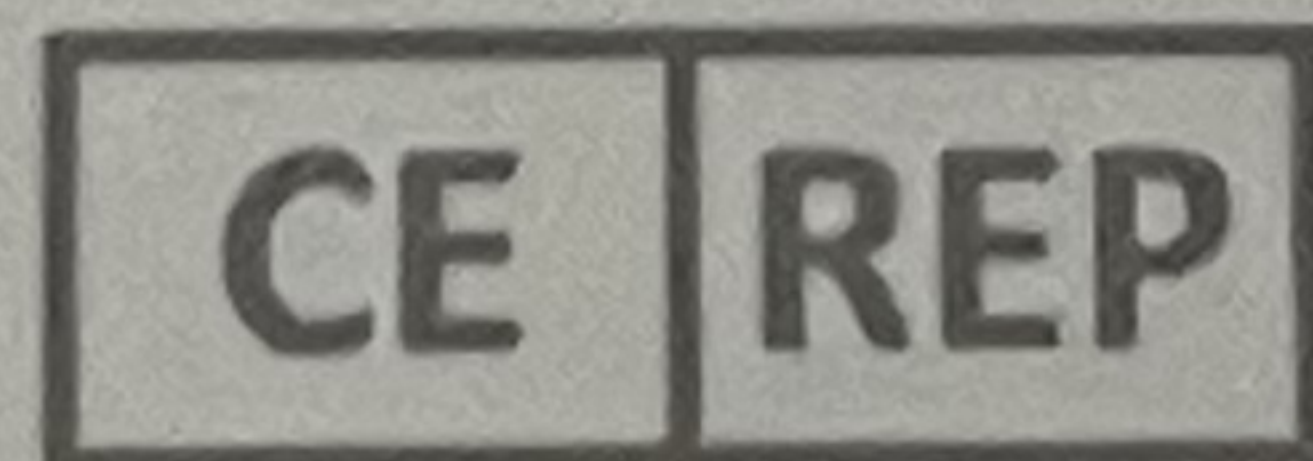

ABBINGDON EU BV
Mercatorweg 28 Arnhem
6827 DC Netherlands

Balanced: $> 1000\text{mW} @ 32\Omega; > 74\text{mW} @ 600\Omega$
UnBAL: $> 320\text{mW} @ 32\Omega; > 40\text{mW} @ 300\Omega$

Output Impedance:

Balanced: $< 1\Omega$
UnBAL: $< 1\Omega$
THD+N: $< 0.005\% (1\text{V} @ 16\Omega)$

SNR:

Balanced: $< 116\text{dB(A)} @ 0\text{dBFS}$
UnBAL: $< 115\text{dB(A)} @ 0\text{dBFS}$

Battery:

Lithium-polymer 3600mAh

Power System:

Charging via USB-C, BC V1.2 compliant
up to 1900mA charging current

Dimensions:

123 x 75 x 19 mm
4.8" x 3.0" x 0.7"

Weight:

215 g (0.5 lbs)

Warranty period: 12 months

**Specifications are subject to change without notice.*

xDSD Gry



1503008935

S/N:

안전인증번호: Certificate No. R-R-IFi-xDSDGryphon



Technology licensed from
AMP (UK) Assembled in China

