


1 2 3 4 5 6

Total length (optional)

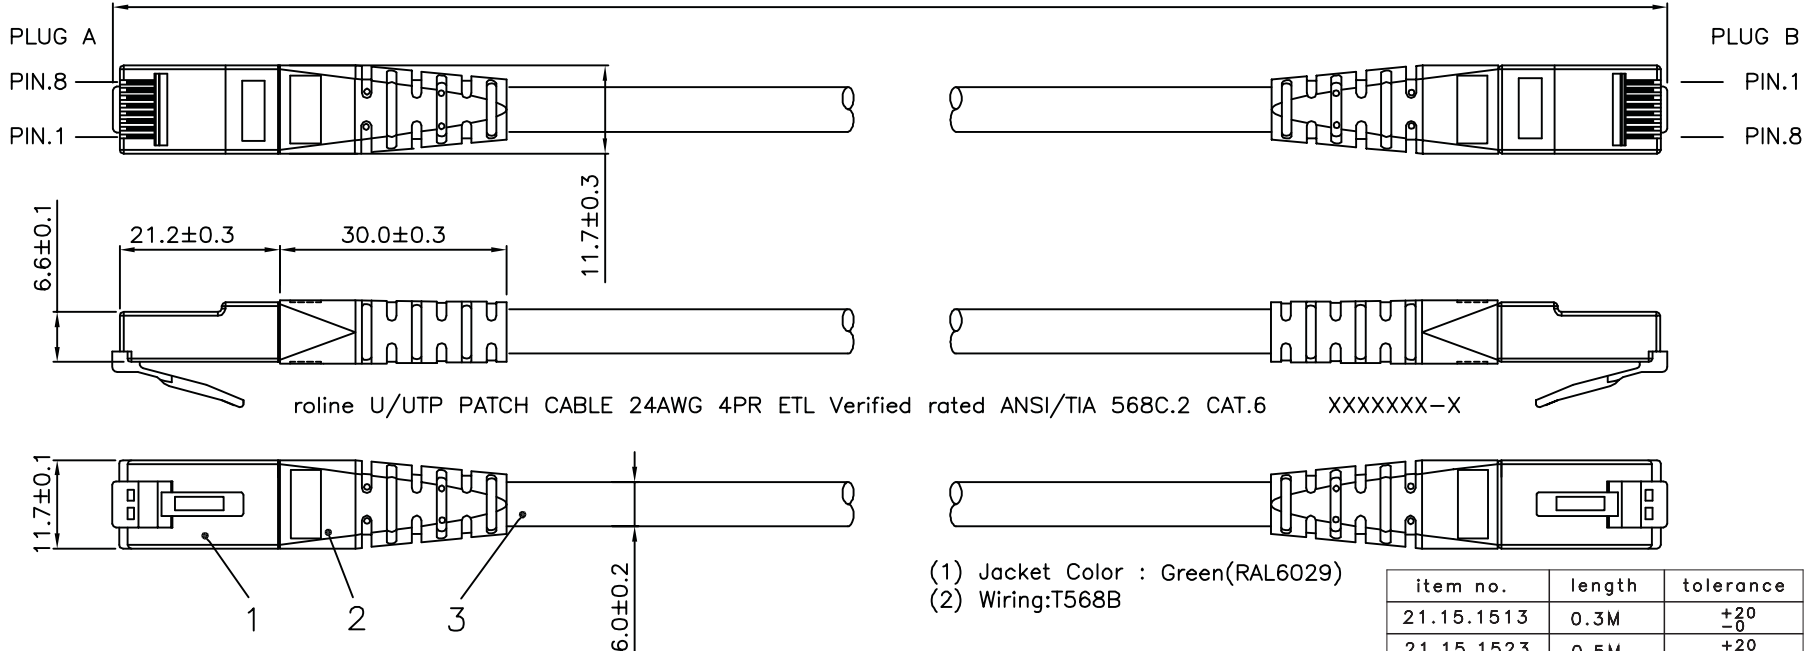

roline U/UTP PATCH CABLE 24AWG 4PR ETL Verified rated ANSI/TIA 568C.2 CAT.6 XXXXXX-X

- (1) Jacket Color : Green(RAL6029)
- (2) Wiring:T568B

item no.	length	tolerance
21.15.1513	0.3M	+20 -0
21.15.1523	0.5M	+20 -0
21.15.1533	1M	+20 -0
21.15.0926	1.5M	+20 -0
21.15.1543	2M	+20 -10
21.15.1553	3M	+20 -10
21.15.1563	5M	+30 -20
21.15.1573	7M	+30 -20
21.15.1583	10M	+30 -20
21.15.1593	15M	+30 -20
21.15.1603	20M	+70 -30

Specification :

- Material :
1. RJ45 Plug :
 - 1-1. Housing : Polycarbonate, Transparent color.
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated.
 2. Molding: PVC.
 3. Cable :
 - 3-1. Jacket : PVC.
 - 3-2. Conductor : 24 AWG stranded copper.
 - 3-3. Isolation : PE.
 - 3-4. Isolation Cross Bar for 4 pairs : PE.
 4. Cable structure : U/UTP, 4 twisted pair with Cross Bar.
 5. Minimum Bending Radius: 50mm

item no	21.15.1513	21.15.1523	21.15.1533	21.15.0926	21.15.1543
	21.15.1553	21.15.1563	21.15.1573	21.15.1583	21.15.1593
Desc	ROLINE Cat 6 U/UTP Patch Cord,Green				
"#": Matching DIM.	DRAWING	23.JuL.2016	byz	SECOMP	
"*": Important DIM.	CHECK	23.JuL.2016	Jane		
Others General DIM.	APPROVAL	23.JuL.2016	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS		DATE	NAME		
X.XXX ±0.005	SCALE	1/1 (A4)	UNIT	mm	
X.XX ±0.05			DRAWING NO.		
X.X ±0.1			DRAWING CLASSIFICATION		S

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

1 2 3 4 5 6 10cm