INSTRUCTION MANUAL


















Guardado FL 3 Black 95202

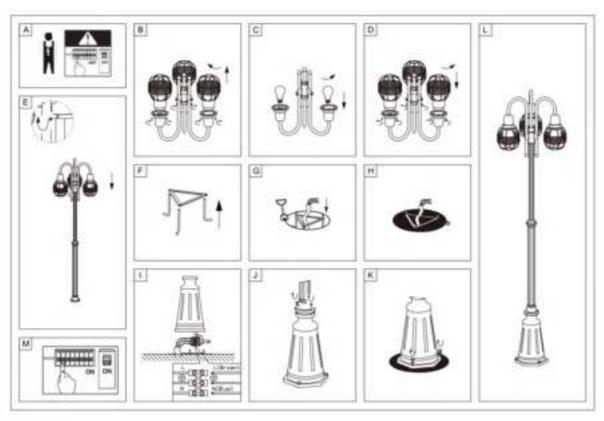

Overall Size



SAFETY INSTRUCTION

Please study the instruction manual and below information carefully before installing or using this product. Please keep this user manual for further reference

- The luminaires may only be installed by authorized and qualified technicians according the valid
 regulations for electrical installation.
- Maintenance of the luminaires is limited to their surfaces. During maintenance no moisture can come
 into contact with any areas of the terminal connections or voltage control parts.
- The electrical supply must be switched off at the outset, preferably by means of a switch in the distribution box, before any installation, maintenance or repair work is undertaken.
- 4. Exterior lighting must not be installed during rain.
- 5. Take account of the minimal separation distance from other objects and the room required around the fitting.
- If in any doubt, consult a professional, taking local installation requirements into account. Some countries stipulate that lighting may be installed only by registered installers.
- Clamping screws in electrical connections must be adequately tightened. This is particularly the case with 12V low voltage conductors.
- Clean with a clean, dry cloth or brush, use no solvents or abrasives. Avoid dampness on all electrical components.
- 9. Take account of all available technical information.
- 10. Meaning of symbols:
 - For indoor use only, where direct contact with water is impossible
 - IPXX This icon indicates the level of water-proof and dust-proof
 - Protection Class I: the fitting must be earthed
 - Protection Class II: the fitting is doubled insulated and does not require earthing
 - Protection Class III: the fitting is low voltage
 - Minimum distance from lighted objects (meters)
 - The type of lamp and maximum size and wattage indicated in each lighting unit must not be exceed; different items require different kind of light sources with different bulb icons
 - The armature is designed to work only with the indicated voltage. Different items require different working voltage.
 - The luminaire can be used in combination with a dimmer
 - The reference light angle and light space of the luminaire
 - This luminaire cannot be disposed together with normal domestic waste in standard rubbish can, but you have to bring it to a staging area for electrical waste
- 11. Take note of the symbols when connecting wires:

17	37	51
	(d)	N

	(00)	(GB)	(10)	(NL)	(PL)	(NO)	[DK]
L	Stromführender Leiter	Live conductor	Conductor	Spanning- operende draed	Proswód przydowy	Strømførende løder	Stremfarmde leder
(1)	Schutzhitter	Earth conductor	Conducteur de protection (borne)	Aardkabel	Przewód usiemiający	Aurdiedringen	terdedringen
N	Neutralleiter	Neutral conductor	Conductinur	Nutrider	Pronwood seroney	Navtralleder	Neutralleder
	(58)	(FI)	(11)	(ES)	(CZ)	(PT)	(GR)
	The band bearing	The second section is a second	Front House toother	Contribution Mr.	Margin and		The control for a

	(50)	(FI)	(11)	(ES)	1023	(PT)	(GR)
L	Strömfürunde Indare	Virtaguhdin	Conduttory sotto- fensione	Conductor de comenta	Vodič pod rapitim	Condutor vive	Ρευματισφόρος αγωγός
(1)	Skydstedare	Susjehdie	Conduttore IV terral	Conductor de- protección	Octraves vedit	Condutor de terra	Αγωγός γείωσης
N	Neutricledare	Neffajoridin	Conduttore headro	Conductor results:	Neutrální vodič	Condutor	Chafferspor, Styleyor,

