



| REV. | REVISED DESCRIPTION | DATE | CHECKED |
|------|---------------------|------------|---------|
| A0 | FIRST RELEASE | 2020/03/26 | |

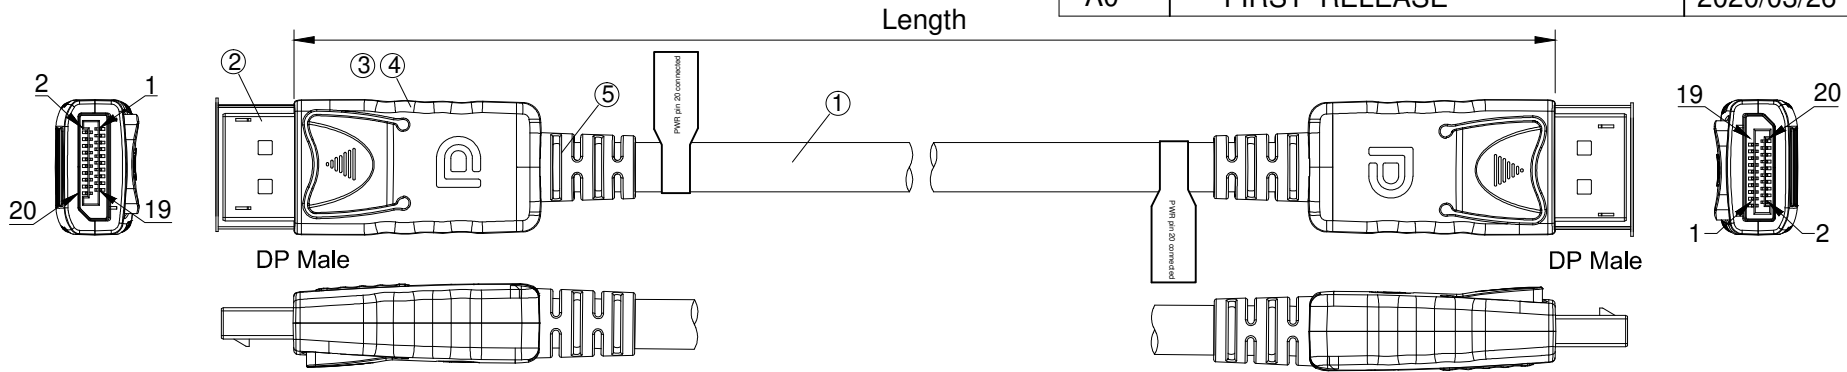


Signal Assignment

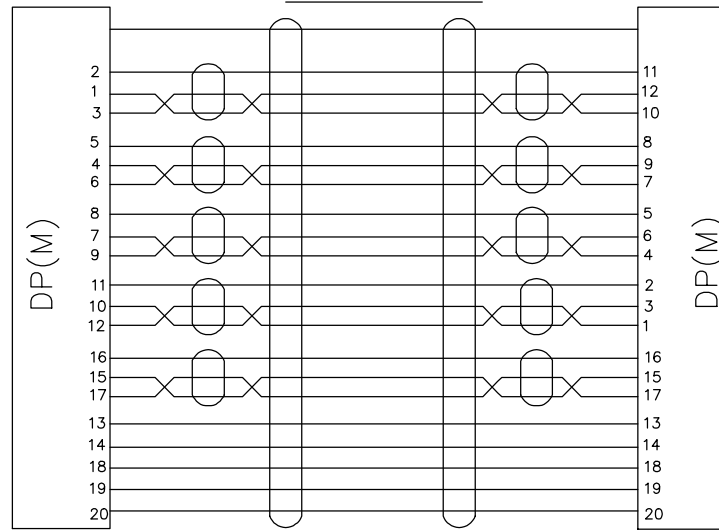

Remark:


- 100% Open/Short Test
- Conductive Resistance:5ohms MAX
- Insulation Resistance:10M ohm MIN.
- HI-POT:DC 300V/10MS.
- The product is RoHS compliant.
- Support 4K*2K@60Hz;
- Pin 20 connected

Cable Spec.

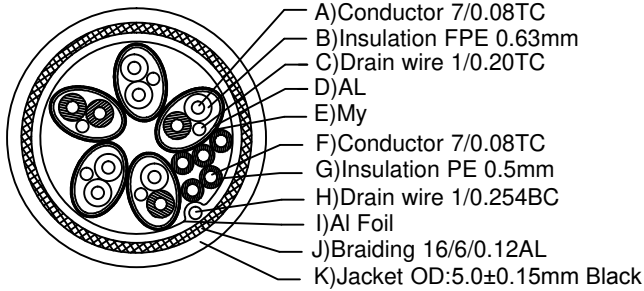

| Item NO. | Length(m) |
|----------|-----------|
| AK3977 | 0.5m |
| AK3978 | 1.0m |
| AK3980 | 2.0m |
| AK3981 | 3.0m |

| ⑤ | SR | 45P PVC, Black | 2PCS | |
|------|-------------------------------|--|-------|--------|
| ④ | Shell | Top and Bottom Shell, ABS with "D"Black | 2SETs | |
| ③ | Inernal Mold | Inner Mould PE | 2PCS | |
| ② | Connector | DP male head hook, Nickel Plated | 2PCS | |
| ① | Cable | (1Px32AWG +D+AL)x5p+5Cx32AWG+ML+AL+D +B; OD5.0mm PVC,Black | | |
| ITEM | DESCRIPTIONS & SPECIFICATIONS | | QTY | REMARK |



| | | | |
|---------------|--|-----------------|------------|
| ACT | | | |
| ERP NO.: | | SAMPLE DWG NO.: | |
| DOC No.: | | REVISION | A0 |
| CUSTOMER: | | UNIT | mm |
| CUSTOMER P/N: | | SCALE | NO |
| DESCRIPTION | | Dp to Dp Cable | |
| | | PAGE NO | 1/1 |
| APPROVAL | | CHECKED | DATE |
| | | DRAWN | 2020/03/26 |