



400 V  $\frac{2,5 \text{ mm}^2 \text{ r/f } 24 \text{ A}}{4 \text{ mm}^2 \text{ f } 32 \text{ A}}$



LISTED  
Splicing Wire Connector  
667 F


600 V max.  
Temperature rating  
of insulating material  
105° C max.

AWG 28-12



$\frac{\text{Cu } 1,6/2 \text{ } \emptyset}{\text{JET } 20 \text{ A } 300 \text{ V}}$

Made by WAGO in Germany / SDH 0916 - www.wago.com

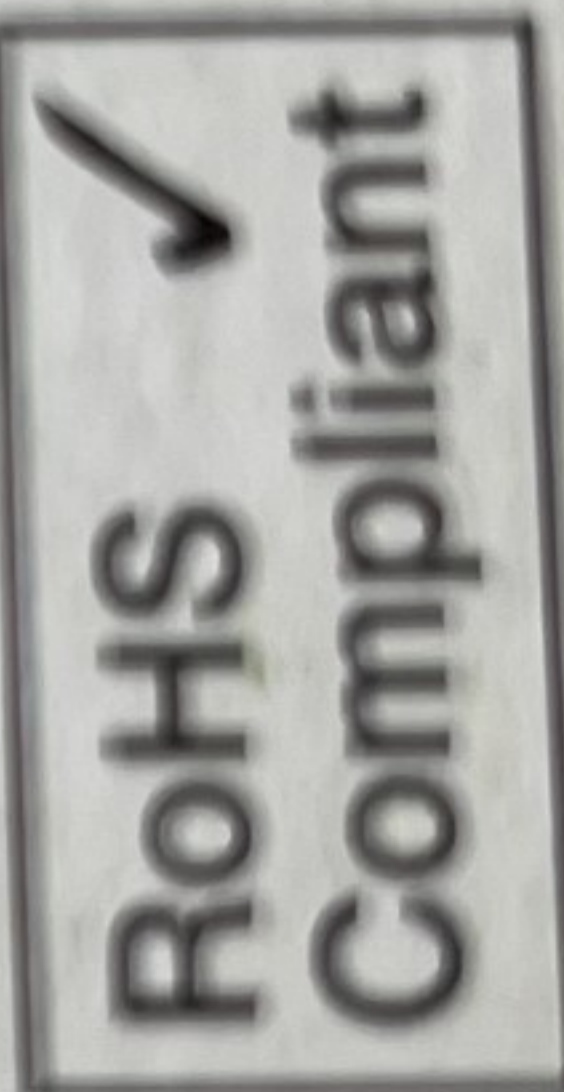


PP019


To be sold only with installation instructions

Venta exclusivamente con instrucciones de instalación

A vendre uniquement avec instructions d'installation

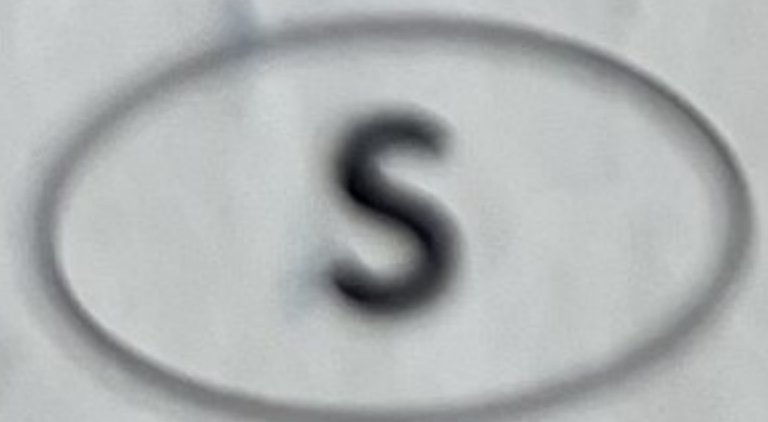

E 1440928

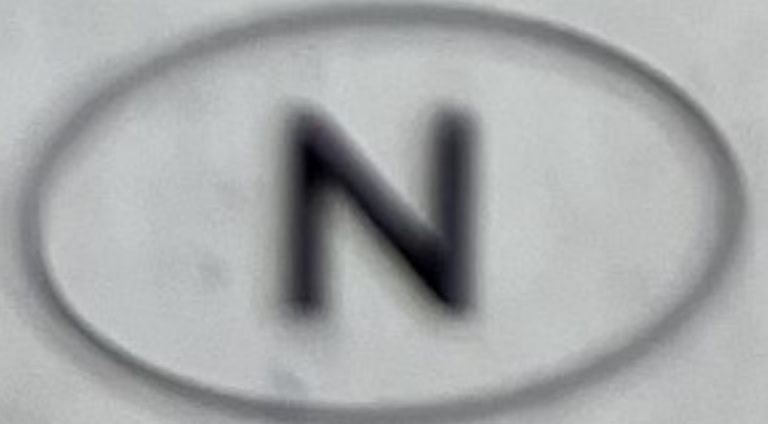

E 1261120



SSTL 1976299

