

NLG Lightweight Coil Tool Lanyard

Product code: 101493

Easy reach and compact connectors make the NLG Lightweight Coil Lanyard the ultimate scaffolding tool lanyard for spanners and ratchets along with other small hand tools at height.

The NLG Lightweight Coil Tool Lanyard has been designed specifically for scaffolding spanners, ratchets and other small tools in the scaffolding and construction industries.

The low recoil force of the tool lanyard allows for effortless reach so that it can be used comfortably all day. The robust, rotating connectors have been designed so that they do not interfere with the operation of the spanner and stops any tangling to make this the ideal scaffold spanner tool lanyard.

INSPECTION

In addition to routine checks prior to each use, all equipment should undergo regular detailed inspection, conducted and recorded by a competent person using the NLG Inspection Checklist. If any part is worn or shows signs of degradation, immediately retire from service. In the event of a drop, quarantine the equipment for thorough inspection.

Specification

- Compact 360° connectors designed for scaffolding spanners and small tools
- Low recoil force makes it ideal for extended periods of use
- Ultra-compact design stays neatly out of the way and reduces snagging hazards
- Anti-puncture wipe clean sleeve makes cleaning easy
- Toughened inspection tag is built for harsh environments
- Unique serial number for easy identification and tracking
- CE marked
- Dynamic load tested and third party certified (2:1 safety factor)
- Dimensions: Extends 48cm to180cm
- Max Load: 1KG (2.2lbs)

MAX LOAD (SWL)

1KG / 2.2LBS


SERIAL NUMBERED


Makes the management of inspection routines and reports easy and traceable


PRODUCT DATA

Weight: 50 Grams

EAN (GTIN-13): 5060572180574 HTS Code: 7326.90.9890

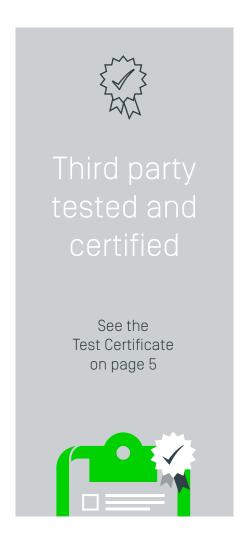

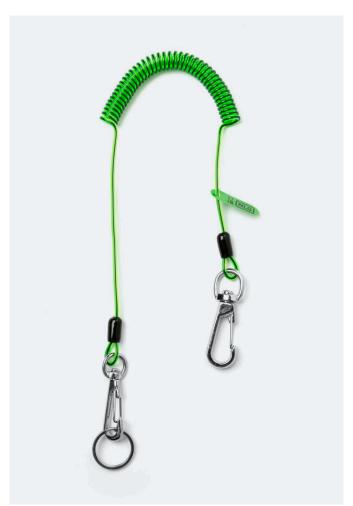

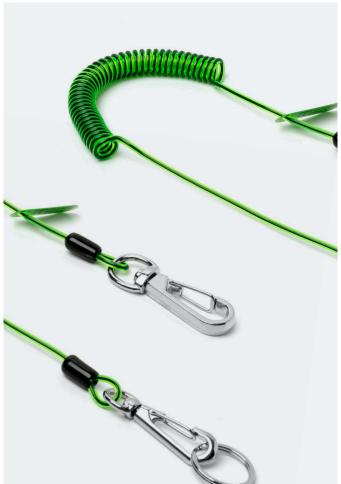





Breathe Safety Testing Laboratory

DROP TEST CERTIFICATE

43265DT-NLG-130493

Manufacturer: Max Load (WLL): **PRODUCT**

IDENTIFICATION NLG 1 KG

> **Product:** Safety Factor:

Lightweight Coil Tool Lanyard 2:1

Reference: Test Load: 101493 2 KG

TEST TECHNICIAN Signature: Name: Gary Paterson

Date: Position:

Senior Lab Technician 14-06-18

TEST RESULTS

SAMPLE NUMBER	FACTOR 0	FACTOR 1 DROP 1	FACTOR 1 DROP 2	FACTOR 1 DROP 3	FACTOR 2 DROP 1	FACTOR 2 DROP 2	FACTOR 2 DROP 3
1	PASS	PASS	PASS	PASS	PASS	PASS	PASS
2	PASS	PASS	PASS	PASS	PASS	PASS	PASS
3	PASS	PASS	PASS	PASS	PASS	PASS	PASS

United Kingdom Accreditation Service ACCREDITATION CERTIFICATE



Breathe Safety Limited

Please note that the results included in this report relate only to the specific equipment samples tested. This is for the purpose of Type Approval of Equipment under the PPE Directive. For more detail refer to the full Accredited Laboratory Policy. This report may not be reproduced without authorisation from the $laboratory. \ Any\ deviations\ from\ specific\ test\ methods\ are\ described\ in\ the\ relevant\ section\ of\ the\ report.$

- Fully Equipped Laboratory for CE Type Approval Testing
 Product Trial testing for specific tests
 CE Technical File review and consultancy advice
 CE Certification facilitation through a partner Notified Body

0844 915 1111

17 Whittle Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7RL

EU Declaration of Conformity

REFERENCE NUMBER: 364101493130

01 / Manufacturer

02 / Product

NAME:	NLG		
ADDRESS:	6 Mannings Heath Road		
	Poole, Dorset, BH12 4NQ		
	United Kingdom		
	<u> </u>		

CODE:	101493
DESCRIPTION:	Lightweight Coil Tool Lanyard
LOAD RATING:	1 KG / 2.2 LBS

03 / Conformity

The undersigned acting on behalf of [01] above hereby Dynamic drop performance testing conducted at 2:1 weight declares that:

Dynamic drop performance testing conducted at 2:1 weight safety factor for tool lanyards and tether points. Static

The PPE described in [02] is in conformity with the provision and scope of our quality control and testing protocols set out in the PPE Regulation (EU) 2016/425 covering all PPE manufacturing, where such is the case, with the standard of fit for purpose design parameters. The above referred to Personal Protective Equipment [02] is identical to the equipment independently tested and certified by BSTL in accordance with EN 364:1992 test methods.

Dynamic drop performance testing conducted at 2:1 weight safety factor for tool lanyards and tether points. Static strength testing conducted at 5:1 weight safety factor for containers and storage equipment.

CERTIFICATE NUMBER:	43265DT-NLG-130493
ISSUED BY:	BSTL, Whittle Road
	Ferndown Ind. Estate, BH217RL, UK

04 / Authorised Person

I herewith certify that the equipment identified above in [02] conforms to the requirements as detailed above:

SIGNED:	Ami	
NAME:	Julian Aris	
POSITION:	Managing Director	
DATE:	25 / 04 / 18	

Tool Tethering Experts neverletgo.com



Never Let Go



NLG Lightweight Coil Tool Lanyard

Product code: 101493

View online neverletgo.com/ lightweight-coil-tool-lanyard

Get all the Product Briefs neverletgo.com

Tool Tethering Experts

neverletgo.com

NLG makes every effort to ensure the information in this Product Brief is accurate and current. However, NLG reserves the right to change the product specification when or if deemed necessary. NLG cannot be held responsible for any inaccuracies or omissions. Copyright © 2018. NLG ®and Never Let Go ® are registered trademarks.