

Product introduction

1 x USB-C Male

Compatible with Thunderbolt 3, Thunderbolt 4. Host USB-C port must support Alt+DP or Displayport

1 x HDMI 2.1

Supports 3840*2160@60Hz(USB-C host requires Displayport 1.4), 3840*2160@30Hz(USB-C host Displayport 1.2)
2560*1440@60Hz, 1920*1080@60Hz

1 x HDMI 2.0

3840*2160@30Hz (USB-C host Displayport 1.2)/2560*1440@60Hz, 1920*1080@60Hz

1 x USB-A 3.0

5Gbit/s Data transfer. Power supply up to 4.5W

1 x USB-C Female

Input power max 5V20W. Power delivery up to 100W

Supports dual MST display mode for Windows.

1 monitor: Max(USB-C host requires Displayport 1.4)

2 monitors: Max 1*3840*2160@60Hz+ 1*1920*1080@60Hz

MacOs: Supports only 1 monitor in extended mode.

Compatibility:

New MacBook/Pro 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023 ChromeBook Pixel, Microsoft Surface Pro 4

Asus Zen AiO, HP Pavilion x2, LG G5 V30 V35 V40, SONY Xperia 1 Xperia 5

Lumia 950/950XL

Samsung S8/S9 Galaxy Note8/S9 Galaxy S8+

Huawei Mate 10 20 30 Pad Pro P 20 30 40, Matebook 2020

Dell XPS12 XPS13 XPS15

Acer Aspire R13 / V15, S5-391-6419 Nitro / V17 Nitro, Predator 15 / 17, ASUS ROG G752VL / GT752VT / GT752VY

GX700VO / ZenBook Pro UX501VW, Clevo P750DM / P770DM / P870DM,

Lenovo ThinkPad P50 / P70, MSI GS40 / GS60 / GT72 / GT80 / Vortex/ WS60 / WS72, VAIO S11

USER MANUAL

Type-C to Dual HDMI Converter


Model: MT-DualHDMI01
www.m-teck.nl

PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

Main unit ×1 User manual ×1

Connection diagram

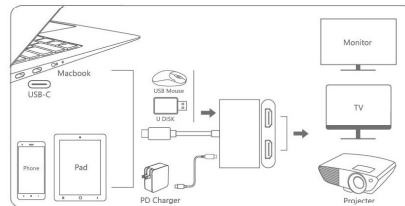

Connect your notebook or other compatible device with Type-C port;

HDMI port Connects TV, project and so on, the HDMI channel must be consistent with the device set channel.

HDMI supports SMT split-screen format. SMT-SST display format can be realized by setting up notebook graphics card in win system.

USB interface to connect keyboard, mouse, camera external card reader hub, etc

Pd3.0 female port connects power adapter to supply power to equipment continuously

Video has been shared to TV, End.

SPECIFICATIONS

Connector	
Power supply	Bus-Powered and Self-Powered (via TYPE-C port)
Output	2 x HDMI: UHD 30Hz+ UHD 30Hz,UHD + FHD,FHD + FHD
Output	1 x HDMI: UHD 60Hz or QHD or FHD
Input	Type-C (Female) x1
Input	Type-C (Male) x1 USBx1
Cable Length	180MM±5MM
Overall size	63x62x15.5MM
Product body Colors	Sliver/Gray
Environmental:	
Operating Temperature	-5 to +35°C(+23 to +95°F)
Operating Humidity	5 to 90%RH (No Condensation)
Storage Temperature	-10°C to +55°C
Storage Humidity	5% to 90 % RH (no condensation)
Supply power	PD3.0 Agreement power supply